





Dell™ S510 RS232 Protocol Document

- **RS232 Projector Pin Assignment (Facing Projector)**




- **RS232 Serial Communication Cable Pin Assignment (Facing Cable)**

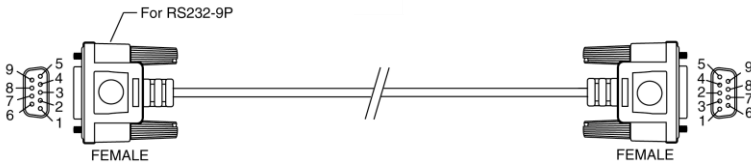

◆ **Pin Assignments**

| RS232 | PIN DESCRIPTION | RS232 |
|-------|-----------------|-------|
| 1 | | |
| 2 | TXD | 3 |
| 3 | RXD | 2 |
| 4 | | |
| 5 | GROUND | 5 |
| 6 | | |
| 7 | Not Used | 7 |
| 8 | Not Used | 8 |
| 9 | | |

 **Note 1:** The RS232 (pin2-3 swap) cable is not provided by Dell.

- **RS232 Protocol Communication Settings**

| Connection Settings | Value |
|---------------------|-----------|
| Baud Rate | 19200 bps |
| Data Bits | 8 bits |
| Parity | None |
| Stop Bits | 1 bit |
| Flow control | None |

Command Types

To display the OSD menu and adjust the settings.

Control Command Syntax (From PC to Projector)

[H][AC][SoP][CRC][ID][SoM][COMMAND]
[H][AC][SoP][CRC][ID][SoM][COMMAND][Value]

Example: Power On Command (Send Low Byte Firsty)

Enter the following code:

0xbe, 0xef, 0x10, 0x05, 0x00, 0xc6, 0xff, 0x11, 0x11, 0x01, 0x00, 0x01

Header [H] ==> Fixed, "be (Low Byte), ef (High Byte)"

Address Code [AC] ==> Fixed, "10"

Size of Payload [SoP] ==> Byte size from MsgID to Command Code, "05 (Low Byte), 00 (High Byte)" or Byte size from MsgID to Value, "06 (Low Byte), 00 (High Byte)".

CRC16 [CRC] ==> CRC value, "c6 (Low Byte), ff (High Byte)"

MsgID [ID] ==> Fixed, "11 11"

MsgSize [SoM] ==> Byte size of Command Code, "01 (Low Byte), 00 (High Byte)" or Byte size of Command Code and Value, "02 (Low Byte), 00 (High Byte)"

Command Code [COMMAND] ==> "Power On" Command, "01"

Projector Response Message Table

Byte0 value:

0x00: Success

0x01: Invalid Command (on the control command list but no valid)

0x02: Error Command (includes CRC error and unknown commands)

Projector Response System Status

Byte0, Byte1, Byte2

Byte0: 0x00 (Success)

Byte1: 0xff (the Command Code of System Status)

Byte2: Return status

Ex: When the projector is in standby mode, the return status will be 0x01.

Projector Response Lamp Hour

Byte0, Byte1, Byte2, Byte3

Byte0: 0x00 (Success)

Byte1: 0x2f (the Command Code of Lamp Hour)

Byte2: LSB (Hex)

Byte3: MSB (Hex)

Ex: 800 ($3 \times 256 + 2 \times 16 = 800$) hours --> 0x00, 0x2f, 0x20, 0x03

Firmware Version Response

Byte0, Byte1, Byte2, Byte3...Byte7

Byte0: 0x00 (Success)

Byte1: 0x30 (the Command Code of Firmware Version)

Byte2...Byte7

Firmware version: 6 Bytes ASCII Code: "MORXXX"

XXX: 000-999

Ex: Version M0R001 → "M0R001" → 0x4d, 0x30, 0x52, 0x30, 0x30, 0x31

(Success, the Command Code of FW Version, 6 Bytes ASCII Code: "MORXXX")

Control Commands List

| Command Description | Header (WORD) | Address Code (BYTE) | Size Of The Payload (WORD) | CR16 For The Entire Packet (WORD) | Msg ID (WORD) | Msg Size (WORD) | Command Code (BYTE) | Value (BYTE) | Comment |
|----------------------------------|---------------|---------------------|----------------------------|-----------------------------------|---------------|-----------------|---------------------|--------------|--|
| Power On | 0xfeb | 0x10 | 0x0005 | 0xffc6 | 0x1111 | 0x0001 | 0x01 | | See Note 2 |
| Menu | 0xfeb | 0x10 | 0x0005 | 0xbf7 | 0x1111 | 0x0001 | 0x02 | | |
| Up | 0xfeb | 0x10 | 0x0005 | 0x7e07 | 0x1111 | 0x0001 | 0x03 | | |
| Down | 0xfeb | 0x10 | 0x0005 | 0x3fc5 | 0x1111 | 0x0001 | 0x04 | | |
| Left | 0xfeb | 0x10 | 0x0005 | 0xfe05 | 0x1111 | 0x0001 | 0x05 | | |
| Right | 0xfeb | 0x10 | 0x0005 | 0xbe04 | 0x1111 | 0x0001 | 0x06 | | |
| R-sync | 0xfeb | 0x10 | 0x0005 | 0x7fc4 | 0x1111 | 0x0001 | 0x07 | | |
| Source Search | 0xfeb | 0x10 | 0x0005 | 0x3fc0 | 0x1111 | 0x0001 | 0x08 | | |
| Volume + | 0xfeb | 0x10 | 0x0005 | 0xfe00 | 0x1111 | 0x0001 | 0x09 | | |
| Volume - | 0xfeb | 0x10 | 0x0005 | 0xbe01 | 0x1111 | 0x0001 | 0x0a | | |
| Zoom In | 0xfeb | 0x10 | 0x0005 | 0x7fc1 | 0x1111 | 0x0001 | 0x0b | | |
| Zoom Out | 0xfeb | 0x10 | 0x0005 | 0x3e03 | 0x1111 | 0x0001 | 0x0c | | |
| Mute On | 0xfeb | 0x10 | 0x0005 | 0xffc3 | 0x1111 | 0x0001 | 0x0d | | |
| Freeze | 0xfeb | 0x10 | 0x0005 | 0xbf2 | 0x1111 | 0x0001 | 0x0e | | |
| Hide | 0xfeb | 0x10 | 0x0005 | 0x7e02 | 0x1111 | 0x0001 | 0x0f | | |
| Video Mode | 0xfeb | 0x10 | 0x0005 | 0x3fca | 0x1111 | 0x0001 | 0x10 | | Toggle |
| V. Keystone Up | 0xfeb | 0x10 | 0x0005 | 0x7fc3 | 0x1111 | 0x0001 | 0x13 | | |
| V. Keystone Down | 0xfeb | 0x10 | 0x0005 | 0x3e09 | 0x1111 | 0x0001 | 0x14 | | |
| Aspect Ratio (Original/4:3/Wide) | 0xfeb | 0x10 | 0x0005 | 0x7e08 | 0x1111 | 0x0001 | 0x17 | | Toggle |
| Power Off | 0xfeb | 0x10 | 0x0005 | 0x3e0c | 0x1111 | 0x0001 | 0x18 | | |
| Source-VGA | 0xfeb | 0x10 | 0x0005 | 0xffcc | 0x1111 | 0x0001 | 0x19 | | |
| Analog-A | 0xfeb | 0x10 | 0x0005 | 0x7fdf | 0x1111 | 0x0001 | 0x23 | | |
| Source-Composite | 0xfeb | 0x10 | 0x0005 | 0x7fdf | 0x1111 | 0x0001 | 0x23 | | 0x00: No Source 0x01: VGA-A 0x02: VGA-B 0x03: HDMI 0x05: Composite 0x07: Wireless Display 0x08: USB Display 0x09: USB Viewer 0x0a: Intel® WiDi 0x0b: Internal Memory 0x0c: HDMI2 |
| Current Source | 0xfeb | 0x10 | 0x0005 | 0xbfd3 | 0x1111 | 0x0001 | 0x26 | | |
| V. Keystone Read | 0xfeb | 0x10 | 0x0005 | 0x3e18 | 0x1111 | 0x0001 | 0x28 | | |
| Lamp-Mode-ECO | 0xfeb | 0x10 | 0x0005 | 0xbf9 | 0x1111 | 0x0001 | 0x2a | | |
| Lamp-Mode-Normal | 0xfeb | 0x10 | 0x0005 | 0x7e19 | 0x1111 | 0x0001 | 0x2b | | |
| Auto Source On | 0xfeb | 0x10 | 0x0005 | 0x3fdb | 0x1111 | 0x0001 | 0x2c | | |
| Auto Source Off | 0xfeb | 0x10 | 0x0005 | 0xfe1b | 0x1111 | 0x0001 | 0x2d | | |
| Factory Reset | 0xfeb | 0x10 | 0x0005 | 0xbe1a | 0x1111 | 0x0001 | 0x2e | | |
| Lamp-Hours | 0xfeb | 0x10 | 0x0005 | 0x7fda | 0x1111 | 0x0001 | 0x2f | | |
| Firmware Version | 0xfeb | 0x10 | 0x0005 | 0x3e12 | 0x1111 | 0x0001 | 0x30 | | |
| Aspect Ratio Read | 0xfeb | 0x10 | 0x0005 | 0xbfd3 | 0x1111 | 0x0001 | 0x32 | | Feedback: 0x00: Original(1:1) 0x01: 4:3 0x02: Wide(16:10) |
| Projector Mode Write | 0xfeb | 0x10 | 0x0006 | 0x9ae3 | 0x1111 | 0x0002 | 0x33 | 0x02,0x04 | 0x02: Front 0x04: Rear |
| Projector Mode Read | 0xfeb | 0x10 | 0x0005 | 0x3fd1 | 0x1111 | 0x0001 | 0x34 | | 0x02: Front 0x04: Rear |
| Brightness Write | 0xfeb | 0x10 | 0x0006 | 0x1ae1 | 0x1111 | 0x0002 | 0x35 | 0x00~0x64 | Range (0x00~0x64) |
| Brightness Read | 0xfeb | 0x10 | 0x0005 | 0xbe10 | 0x1111 | 0x0001 | 0x36 | | Range (0x00~0x64) |
| Contrast Write | 0xfeb | 0x10 | 0x0006 | 0x9b20 | 0x1111 | 0x0002 | 0x37 | 0x00~0x64 | Range (0x00~0x64) |
| Contrast Read | 0xfeb | 0x10 | 0x0005 | 0x3fd4 | 0x1111 | 0x0001 | 0x38 | | Range (0x00~0x64) |
| Color Temperature Write | 0xfeb | 0x10 | 0x0006 | 0x1ae4 | 0x1111 | 0x0002 | 0x39 | 0x01~0x04 | 0x01: Low 0x02: Mid 0x03: High 0x04: Custom |
| Color Temperature Read | 0xfeb | 0x10 | 0x0005 | 0xbe15 | 0x1111 | 0x0001 | 0x3a | | 0x01: Low 0x02: Mid 0x03: High 0x04: Custom |
| Saturation Write | 0xfeb | 0x10 | 0x0006 | 0x9b25 | 0x1111 | 0x0002 | 0x3b | 0x00~0x64 | Range (0x00~0x64) |
| Saturation Read | 0xfeb | 0x10 | 0x0005 | 0x3e17 | 0x1111 | 0x0001 | 0x3c | | Range (0x00~0x64) |
| Sharpness Write | 0xfeb | 0x10 | 0x0006 | 0x1b27 | 0x1111 | 0x0002 | 0x3d | 0x00~0x1f | Range (0x00~0x1f) |
| Sharpness Read | 0xfeb | 0x10 | 0x0005 | 0xbf6 | 0x1111 | 0x0001 | 0x3e | | Range (0x00~0x1f) |
| Tint Write | 0xfeb | 0x10 | 0x0006 | 0x9ae6 | 0x1111 | 0x0002 | 0x3f | 0x00~0x64 | Range (0x00~0x64) |
| Enter | 0xfeb | 0x10 | 0x0005 | 0x3ff6 | 0x1111 | 0x0001 | 0x40 | | |

| | | | | | | | | | |
|------------------------|-------|------|--------|--------|--------|--------|------|------------------------|--|
| Tint Read | 0xfbe | 0x10 | 0x0005 | 0xfe36 | 0x1111 | 0x0001 | 0x41 | | Range (0x00~0x64) |
| Video Mode Read | 0xfbe | 0x10 | 0x0005 | 0xbe37 | 0x1111 | 0x0001 | 0x42 | | 0x00: Presentation Mode 0x01: Birght Mode 0x02: Movie Mode 0x03: sRGB Mode 0x04: Custom Mode 0x01: RGB 0x02: YCbCr 0x03: YPbPr |
| Color Space Write | 0xfbe | 0x10 | 0x0006 | 0x9b07 | 0x1111 | 0x0002 | 0x43 | 0x01~0x03 | 0x01: RGB 0x02: YCbCr 0x03: YPbPr |
| Color Space Read | 0xfbe | 0x10 | 0x0005 | 0x3e35 | 0x1111 | 0x0001 | 0x44 | | 0x01: RGB 0x02: YCbCr 0x03: YPbPr |
| White Intensity Write | 0xfbe | 0x10 | 0x0006 | 0x1b05 | 0x1111 | 0x0002 | 0x45 | 0x00~0x0a | Range (0x00~0x0a) |
| White Intensity Read | 0xfbe | 0x10 | 0x0005 | 0xbff4 | 0x1111 | 0x0001 | 0x46 | | Range (0x00~0x0a) |
| H. Position Write | 0xfbe | 0x10 | 0x0006 | 0x1b00 | 0x1111 | 0x0002 | 0x49 | 0x00~0x64 | Range(0x00~0x64) See Note 3 |
| H. Position Read | 0xfbe | 0x10 | 0x0005 | 0xbff1 | 0x1111 | 0x0001 | 0x4a | | Range(0x00~0x64) See Note 3 |
| V. Position Write | 0xfbe | 0x10 | 0x0006 | 0x9ac1 | 0x1111 | 0x0002 | 0x4b | 0xfb~0xff, 0x00 | Range(0xfb~0x00) See Note 3 |
| V. Position Read | 0xfbe | 0x10 | 0x0005 | 0x3ff3 | 0x1111 | 0x0001 | 0x4c | | Range(0xfb~0x00) See Note 3 |
| Current Language Write | 0xfbe | 0x10 | 0x0006 | 0x1ac3 | 0x1111 | 0x0002 | 0x4d | 0x01~0x10 | 0x01: English 0x02: German 0x03: French 0x04: Italian 0x05: Spanish 0x06: Polish 0x07: Swedish 0x08: Dutch 0x09: Iberian Portuguese 0x0a: Japanese 0x0b: T_Chinese 0x0c: S_Chinese 0x0d: Korean 0x0e: Russian 0x0f: Arabic 0x10:Turkish |
| Current Language Read | 0xfbe | 0x10 | 0x0005 | 0xbe32 | 0x1111 | 0x0001 | 0x4e | | 0x01: English 0x02: German 0x03: French 0x04: Italian 0x05: Spanish 0x06: Polish 0x07: Swedish 0x08: Dutch 0x09: Iberian Portuguese 0x0a: Japanese 0x0b: T_Chinese 0x0c: S_Chinese 0x0d: Korean 0x0e: Russian 0x0f: Arabic 0x10:Turkish |
| Volume Read | 0xfbe | 0x10 | 0x0005 | 0x7ff2 | 0x1111 | 0x0001 | 0x4f | | Range (0x00~0x14) |
| Source-HDMI | 0xfbe | 0x10 | 0x0005 | 0x3e3a | 0x1111 | 0x0001 | 0x50 | | |
| Password | 0xfbe | 0x10 | 0x0009 | 0xaaf9 | 0x1111 | 0x0005 | 0x56 | 0x30~0x39 0x41~0x5a | 4byte: Original Password |
| Change Password | 0xfbe | 0x10 | 0x000d | 0x99fa | 0x1111 | 0x0009 | 0x57 | 0x30~0x39 0x41~0x5a | 4byte: Original Password 4byte: New Password |
| H. Frequency | 0xfbe | 0x10 | 0x0005 | 0xfe3c | 0x1111 | 0x0001 | 0x59 | | (KHz) |
| V. Frequency | 0xfbe | 0x10 | 0x0005 | 0xbe3d | 0x1111 | 0x0001 | 0x5a | | (Hz) |
| H. Sync Polarity | 0xfbe | 0x10 | 0x0005 | 0x7ffd | 0x1111 | 0x0001 | 0x5b | | 0x01: Negative 0x02: Postivite |
| V. Sync Polarity | 0xfbe | 0x10 | 0x0005 | 0x3e3f | 0x1111 | 0x0001 | 0x5c | | 0x01: Negative 0x02: Postivite |
| Mute Off | 0xfbe | 0x10 | 0x0005 | 0x7e3e | 0x1111 | 0x0001 | 0x5f | | |
| Get Mute State | 0xfbe | 0x10 | 0x0005 | 0xffee | 0x1111 | 0x0001 | 0x61 | | 0x00: Mute Off 0x01: Mute On |
| Unfreeze | 0xfbe | 0x10 | 0x0005 | 0xbfef | 0x1111 | 0x0001 | 0x62 | | |
| Unhide | 0xfbe | 0x10 | 0x0005 | 0x3fed | 0x1111 | 0x0001 | 0x64 | | |
| Get Hide State | 0xfbe | 0x10 | 0x0005 | 0xfe2d | 0x1111 | 0x0001 | 0x65 | | 0x00: Unhide 0x01: Hide |
| OSD Transparency | 0xfbe | 0x10 | 0x0006 | 0x5adc | 0x1111 | 0x0002 | 0x66 | 0x00~0x0f | Range (0x00~0x0f) |

| | | | | | | | | | |
|---------------------------|--------|------|--------|---------|--------|--------|------|-----------|---|
| Write | | | | | | | | | |
| OSD Transparency Read | 0xefbe | 0x10 | 0x0005 | 0x7fec | 0x1111 | 0x0001 | 0x67 | | Range (0x00-0x0f) |
| Volume Write | 0xefbe | 0x10 | 0x0006 | 0xbd18 | 0x1111 | 0x0002 | 0x68 | 0x00-0x14 | Range (0x00-0x14) |
| Source-VGA Analog-B | 0xefbe | 0x10 | 0x0005 | 0xfe28 | 0x1111 | 0x0001 | 0x69 | | |
| Temp Alert | 0xefbe | 0x10 | 0x0005 | 0xbe29 | 0x1111 | 0x0001 | 0x6a | | 0x00: Normal 0x01: Abnormal |
| Exit Lockup | 0xefbe | 0x10 | 0x0005 | 0xffeb | 0x1111 | 0x0001 | 0x6d | | |
| Closed Captions | 0xefbe | 0x10 | 0x0006 | 0x7e2a | 0x1111 | 0x0002 | 0x6f | 0x00-0x04 | 0x00: Off 0x01: CC1 0x02: CC2 0x03: CC3 0x04: CC4 |
| Lamp Mode Dynamic | 0xefbe | 0x10 | 0x0005 | 0x3fe2 | 0x1111 | 0x0001 | 0x70 | | |
| Lamp Mode Extreme Dimming | 0xefbe | 0x10 | 0x0005 | 0xfe22 | 0x1111 | 0x0001 | 0x71 | | |
| Source-HDMI2 | 0xefbe | 0x10 | 0x0005 | 0xbbe23 | 0x1111 | 0x0001 | 0x72 | | |
| Power Saving | 0xefbe | 0x10 | 0x0006 | 0xfe66 | 0x1111 | 0x0002 | 0x81 | 0x00-0x78 | 0x00, 0x05, 0x0a, 0x0f, 0x14, 0x19, 0x1e, 0x23, 0x28, 0x2d, 0x32, 0x37, 0x3c, 0x41, 0x46, 0x4b, 0x50, 0x55, 0x5a, 0x5f, 0x64, 0x69, 0x6e, 0x73, 0x78 |
| Quick Shutdown | 0xefbe | 0x10 | 0x0006 | 0xbe67 | 0x1111 | 0x0002 | 0x82 | 0x00-0x01 | 0x00: No 0x01: Yes |
| Lamp-Mode Read | 0xefbe | 0x10 | 0x0005 | 0x7fa7 | 0x1111 | 0x0001 | 0x83 | | 0x00: Eco 0x01: Normal 0x02: Dynamic 0x03: Extreme Dimming |
| Operating Hours | 0xefbe | 0x10 | 0x0005 | 0x3e65 | 0x1111 | 0x0001 | 0x84 | | Hours (2 byte) |
| Password Off | 0xefbe | 0x10 | 0x0005 | 0xffa5 | 0x1111 | 0x0001 | 0x85 | | |
| Password Delete | 0xefbe | 0x10 | 0x0005 | 0xbfa4 | 0x1111 | 0x0001 | 0x86 | | |
| Zoom Status | 0xefbe | 0x10 | 0x0005 | 0xffa0 | 0x1111 | 0x0001 | 0x89 | | Range (0x01-0x0a) 0x00, 0x05, 0x0a, 0x0f, 0x14, 0x19, 0x1e, 0x23, 0x28, 0x2d, 0x32, 0x37, 0x3c, 0x41, 0x46, 0x4b, 0x50, 0x55, 0x5a, 0x5f, 0x64, 0x69, 0x6e, 0x73, 0x78 |
| Power Saving Status | 0xefbe | 0x10 | 0x0005 | 0xbfa1 | 0x1111 | 0x0001 | 0x8a | | 0x01: Standby 0x02: Warm Up 0x03: Power On 0x04: Cooling 0x05: Power Saving |
| Source-Wireless Display | 0xefbe | 0x10 | 0x0005 | 0x7e61 | 0x1111 | 0x0001 | 0x8b | | |
| Wireless Off | 0xefbe | 0x10 | 0x0005 | 0x3fa3 | 0x1111 | 0x0001 | 0x8c | | |
| Wireless On | 0xefbe | 0x10 | 0x0005 | 0xfe63 | 0x1111 | 0x0001 | 0x8d | | |
| Source-USB Display | 0xefbe | 0x10 | 0x0005 | 0xbe62 | 0x1111 | 0x0001 | 0x8e | | |
| Source-USB Viewer | 0xefbe | 0x10 | 0x0005 | 0x7fa2 | 0x1111 | 0x0001 | 0x8f | | |
| Source- Intel® WiDi | 0xefbe | 0x10 | 0x0005 | 0x3fac | 0x1111 | 0x0001 | 0x98 | | |
| Source-Internal Memory | 0xefbe | 0x10 | 0x0005 | 0xfe6c | 0x1111 | 0x0001 | 0x99 | | |
| System Status | 0xefbe | 0x10 | 0x0005 | 0x7e46 | 0x1111 | 0x0001 | 0xff | | 0x01: Standby 0x02: Warm Up 0x03: Power On 0x04: Cooling 0x05: Power Saving |



Note 2: After power on the projector, wait for 5 seconds before sending next command.

Note 3: The range will depend on VGA input resolution.

Note 4: If sending multiple commands, check that a response has been received from the projector before sending next command.

Information in this document is subject to change without notice.

© 2014 Dell Inc. All rights reserved.

Reproduction of these materials in any manner whatsoever without the written permission of Dell Inc. is strictly forbidden.

Trademarks used in this text: Dell and the DELL logo are trademarks of Dell Inc.

Other trademarks and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Dell Inc. disclaims any proprietary interest in trademarks and trade names other than its own.