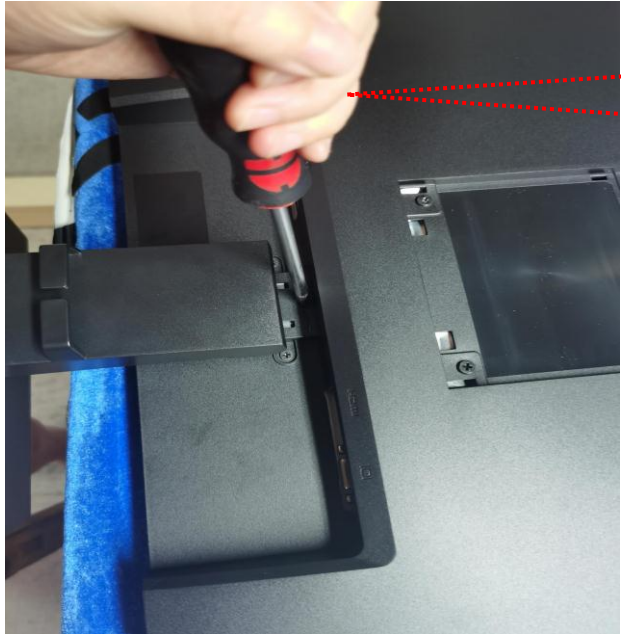

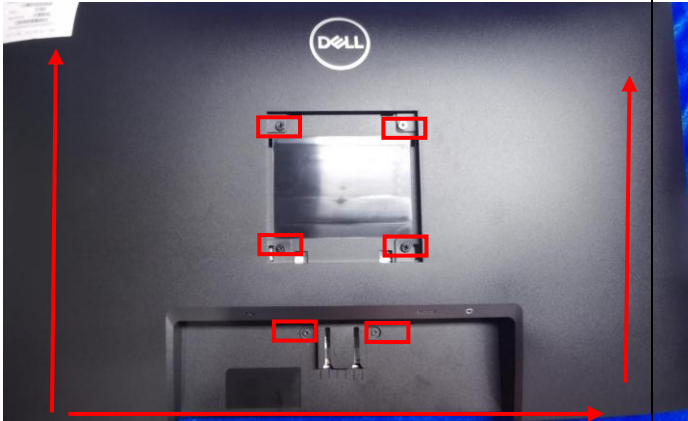


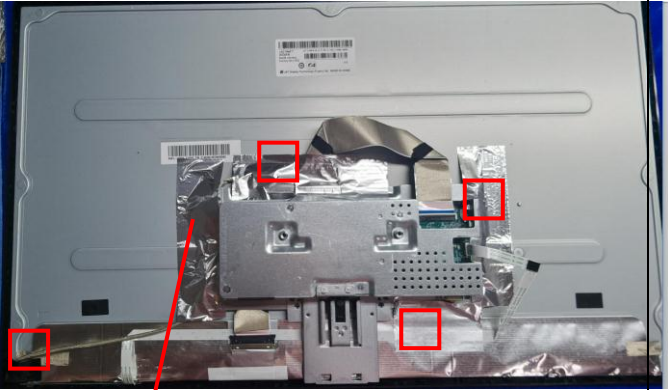
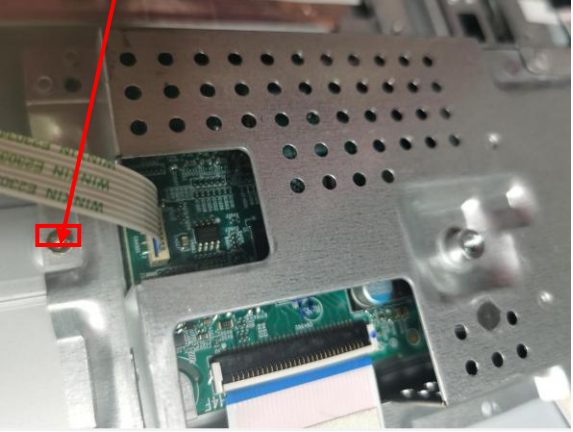


8. Mechanical Instruction

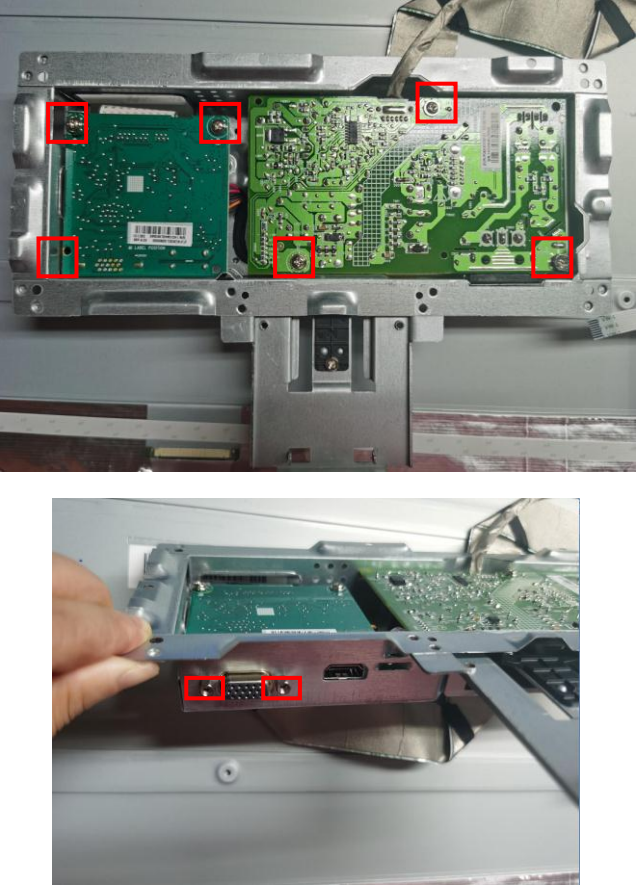


8.1.1 Disassembly Procedures (E2722H)

Tools: 2 Power screwdrivers ($\phi=5\text{mm}$, $L=60\text{mm}$); 1 small cross screwdriver; turnbuckle driver;

Setting: Power screwdriver torque A=6 kgF.Cm


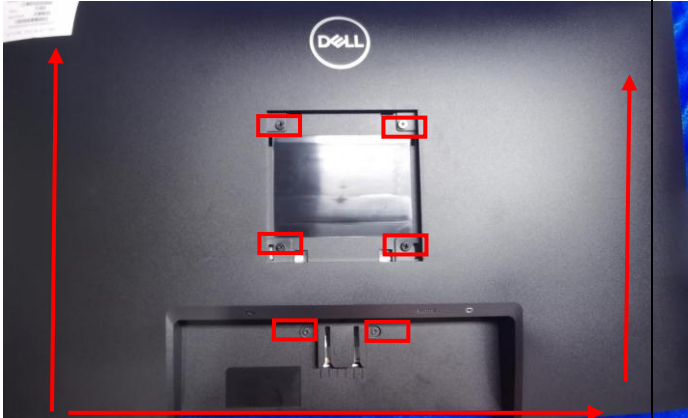
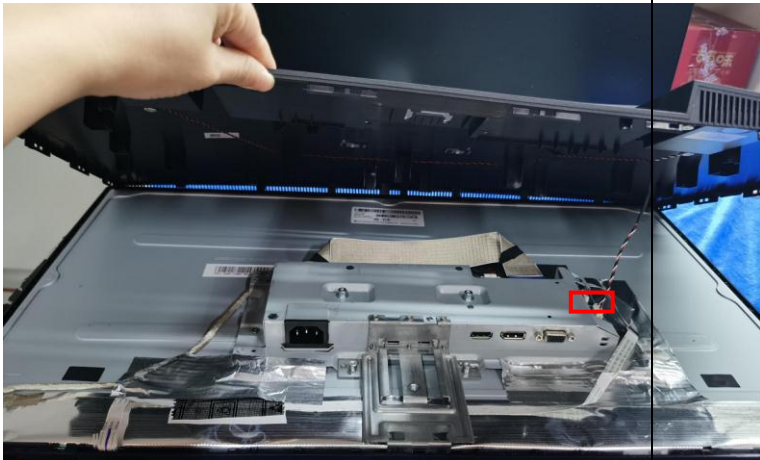
| Step | Figure | TOOL | Remark |
|-------------------------------|---|---|---|
| <p>Remove the Base ass'y.</p> |  |  | <p>Use the tip of the screw driver to press the hidden button and pull out the stand.</p> <p>Note: Put the monitor on a flat, soft and clean surface. Unscrew the 4 screws by the Philips-head Screwdriver.</p> |
| <p>Remove the rear cover</p> |  | | <p>Unscrew the 4 screws by the Philips-head Screwdriver and insert the scraper into the button site to open the rear cover</p> |

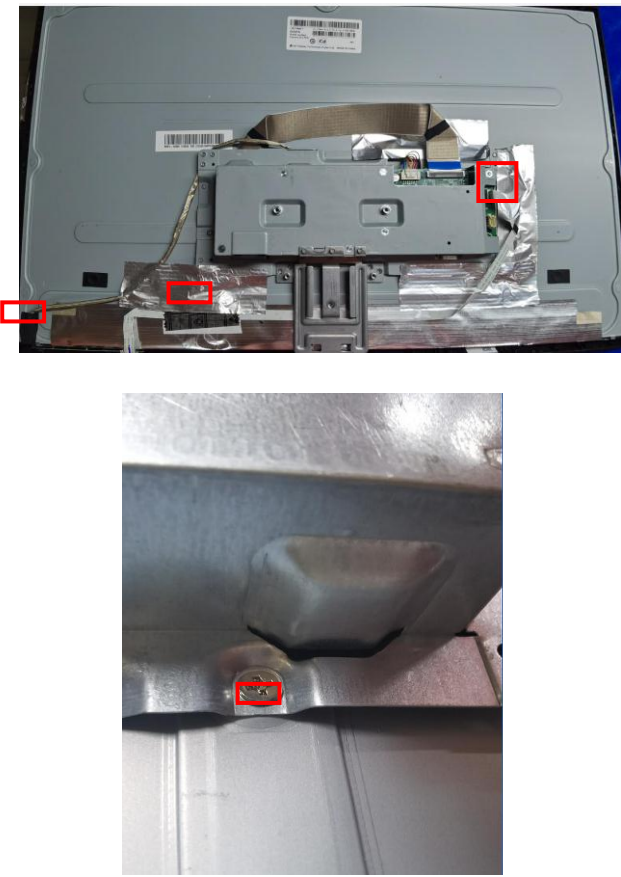
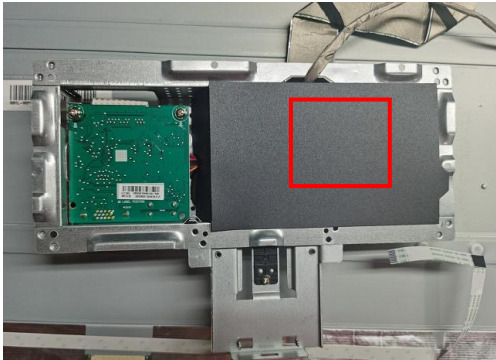
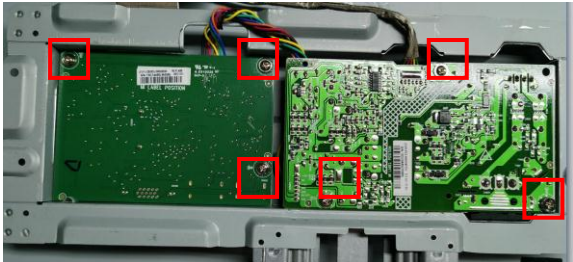
| | | | |
|-------------------------------------|---|--|---|
| <p>Disconnect the cables</p> |  | | <p>Remove the connectors and tapes</p> |
| <p>Remove the mainframe</p> |   | | <p>Unscrew the two screws on the two sites of mainframe</p> |
| |  | | <p>remove the mylar on the powerboard</p> |
| | | | |




| | | | |
|---|---|--|---|
| <p>Remove the mainboard and power board</p> |  | | <p>Unscrew the screws on the boards</p> <p>Unscrew the two Hexagonal screws</p> |
| <p>Mainboard and powerboard</p> |  | | |
| <p>panel</p> |  | | |
| | | | |

8.1.2 Disassembly Procedures (E2722HS)

| Step | Figure | TOOL | Remark |
|------|--------|------|--------|
|------|--------|------|--------|

| | | |
|--------------------------------------|--|--|
| <p>Remove the Base ass'y.</p> |  | <p>Unscrew the screw loosely by hand and pull out the stand.</p> <p>Note: Put the monitor on a flat, soft and clean surface.</p> |
| <p>Remove the rear cover</p> |  | <p>Unscrew the 4 screws by the Philips-head Screwdriver and insert the scraper into the button site to open the rear cover</p> |
| |  | <p>Disconnect speaker cables</p> |

| | | | |
|--|---|--|---|
| <p>Remove the mainframe</p> |  | | <p>Remove all the aluminum foil and the cable connectors and Unscrew the two screws on the two sites of mainframe</p> |
| |  | | <p>remove the mylar on the powerboard</p> |
| <p>Remove the mainboard and power board</p> |  | | <p>Unscrew the screws on the boards</p> |

| | | | |
|---------------------------------|--|--|----------------------------------|
| |  | | Unscrew the two Hexagonal screws |
| Mainboard and powerboard |  | | |
| panel |  | | |
| | | | |

8.2. Product material information

The following substances, preparations, or components should be disposed of or recovered separately from other WEEE in compliance with Article 4 of EU Council Directive 75/442/EEC.

| | |
|---|---|
| Capacitors / condensers (containing PCB/PCT) | No used |
| Mercury containing components | No used |
| Batteries | No used |
| Printed circuit boards (with a surface greater than 10 square cm) | Product has printed circuit boards (with a surface greater than 10 square cm) |
| Component contain toner, ink and liquids | No used |
| Plastic containing BFR | No used |
| Component and waste contain asbestos | No used |
| CRT | No used |
| Component contain CFC, HCFC, HFC and HC | No used |

| | |
|---|---|
| Gas discharge lamps | No used |
| LCD display > 100 cm ² | Product has an LCD greater than 100 cm ² |
| External electric cable | Product has external cables |
| Component contain refractory ceramic fibers | No used |
| Component contain radio-active substances | No used |
| Electrolyte capacitors (height > 25mm, diameter > 25mm) | Product has electrolyte capacitors (height > 25mm, diameter > 25mm) |

8.3. Tools Required

List the type and size of the tools that would typically can be used to disassemble the product to a point where components and materials requiring selective treatment can be removed.

Tool Description:

- Screwdriver (Phillip-head, Hexagonal head)
- Penknife