



Views

Specifications

Copyright © 2014 Dell Inc. All rights reserved. This product is protected by U.S. and international copyright and intellectual property laws. Dell and the Dell logo are trademarks of Dell Inc. in the United States and/or other jurisdictions. All other marks and names mentioned herein may be trademarks of their respective companies.

2014 - 10 Rev. A01 Regulatory model: P49G | Type: P49G001 Computer model: Inspiron 5442/Inspiron 5443





Right



Base



Display

1 Power and battery-status light

Indicates the power state and battery state of the computer.


White light – Power adapter is connected and the battery is being charged.

Amber — Battery charge is low or critical.

2 Hard-drive activity light

Turns on when the computer reads from or writes to the hard drive.



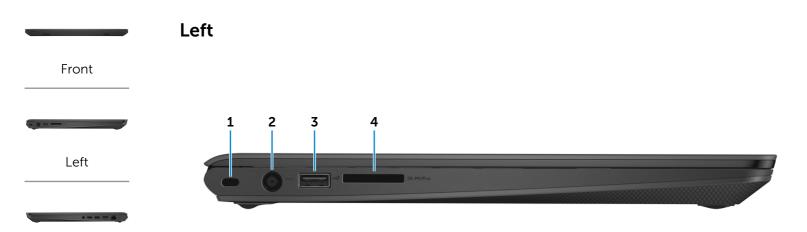

Right



Base



Display

1 Security-cable slot

Connect a security cable to prevent unauthorized movement of your computer.

2 Power-adapter port

Connect a power adapter to provide power to your computer and charge the battery.

3 USB 2.0 port

Connect peripherals such as storage devices, printers, and so on. Provides data transfer speeds up to 480 Mbps.

4 Media-card reader

Reads from and writes to media cards.





Right



Base



Display

1 Headset port

Connect a headphone, a microphone, or a headphone and microphone combo (headset).

2 USB 3.0 ports (2)

Connect peripherals such as storage devices, printers, and so on. Provides data transfer speeds up to 5 Gbps.

3 HDMI port


Connect a TV or another HDMI-in enabled device. Provides video and audio output.

4 Network port

Connect an Ethernet (RJ45) cable from a router or a broadband modem for network or internet access.



Base





Display

Press to turn on the computer if it is turned off or in sleep state.

Press to put the computer in sleep state if it is turned on. Press and hold for 10 seconds to force shut-down the computer.

NOTE: You can customize the power-button behaviour in Power Options. For more information, see *Me and My Dell* at **dell.com/support/manuals**.

2 Right-click area

Press to right click.

3 Touchpad

3

4

2

Move your finger on the touchpad to move the mouse pointer. Tap to left-click.

4 Left-click area

Press to left click.





Front

Right



Base



Display

Display



1 Microphone

Provides high-quality digital sound input for audio recording, voice calls, and so on.

2 Camera

Allows you to video chat, capture photos, and record videos.

3 Camera-status light

Turns on when the camera is in use.



Dimensions and Weight

Height	22.40 mm (0.88 in)
Width	342 mm (13.46 in)
Depth	246 mm (9.69 in)
Weight	1.89 kg (4.17 lb) NOTE : The weight of your laptop varies depending on the configuration ordered and the manufacturing variability.



System Information

Computer model	Inspiron 5442	Inspiron 5443
Processor	 4th Generation Intel Core i3 ULV 4th Generation Intel Core i5 ULV 	 5th Generation Intel Core i3 ULV 5th Generation Intel Core i5 ULV
L3 cache	3 MB	
Chipset	Integrated in processor	





Memory

Slots	Two SODIMM slots
Туре	Dual-channel DDR3L
Speed	1600 MHz
Configurations supported	4 GB, 6 GB, and 8 GB



Ports and Connectors

External:	
Network	One RJ45 port
USB	One USB 2.0 portTwo USB 3.0 ports
Audio/Video	 One HDMI port One headphone and microphone combo (headset) port
Internal:	
M.2 slot	One M.2-2230 slot for Wi-Fi and Bluetooth combo card



Communications

Ethernet

Wireless

10/100 Mbps Ethernet controller integrated on system board

- Wi-Fi 802.11 b/g/n/ac
- Intel WiDi (Wireless Display)
- Bluetooth 4.0





Video

Controller:	
Integrated	Inspiron 5442 — Intel HD Graphics 4400
	Inspiron 5443 — Intel HD Graphics 5500
Discrete	AMD Radeon HD R5 M240
Memory:	
Integrated	Shared system memory
Discrete	2 GB DDR3





Audio

Controller	Realtek ALC3234CG with Waves MaxxAudio
Speakers	Two
Output:	
Average	2 watt
Peak	2.5 watt
Microphone	Digital microphone
Volume controls	Media-control shortcut keys





Storage

Interface Hard drive SATA 6 Gbps One 2.5-inch drive (supports Intel Smart Response Technology)




Media-Card Reader

Туре

Cards supported

One 5-in-1 slot

- SD card
- SD High-Capacity (SDHC) card
- SD Extended Capacity (SDXC) card with Ultra High Speed (UHS)
- Memory Stick (MS)
- Memory Stick PRO (MS PRO)

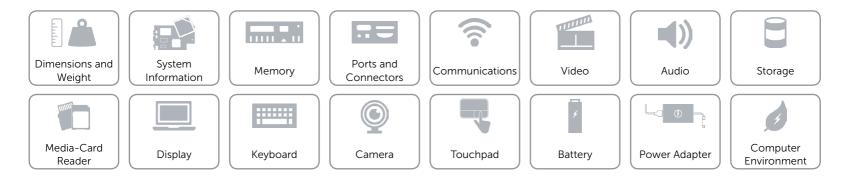



Display

Туре	14-inch HD
Resolution (maximum)	1366 x 768
Pixel pitch	0.2265 mm
Dimensions:	
Height	173.95 mm (6.85 in)
Width	309.40 mm (12.18 in)
Diagonal	355.60 mm (14 in)
Refresh rate	60 Hz
Operating angle	0 degrees (closed) to 135 degrees
Controls	Brightness can be controlled using shortcut keys.





Keyboard

Туре	Standard keyboard
Shortcut keys	Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. To type the alternate character, press Shift and the desired key. To perform secondary functions, press Fn and the desired key.
	NOTE : You can change the behavior of the shortcut keys by pressing Fn+Esc or by changing Function Key Behavior in System Setup.





Camera

Resolution:	
Still image	0.92 megapixel
Video	1280 x 720 (HD) at 30 fps
Diagonal viewing angle	74 degrees





Touchpad

Resolution:	
Horizontal	1260 dpi
Vertical	1207 dpi
Dimensions:	
Width	105 mm (4.13 in)
Height	80 mm (3.15 in)





Battery

Туре	 3 cell "smart" lithium ion (43.50 WHr) 4 cell "smart" lithium ion (58 WHr) 	
Dimensions:		
Width	208.25 mm (8.20 in)	
Depth	124.70 mm (4.91 in)	
Height	7.80 mm (0.31 in)	
	3 cell	4 cell
Weight (maximum)	0.28 kg (0.62 lb)	0.35 kg (0.77 lb)
Voltage	11.10 VDC	7.40 VDC
Operating time	Varies depending on operating conditions certain power-intensive conditions.	and can significantly reduce under
Life span (approximate)	300 discharge/charge cycles	
Temperature range:		
Operating	0°C to 35°C (32°F to 95°F)	
Storage	–40°C to 65°C (–40°F to 149°F)	
Coin-cell battery	CR-2032	





Power Adapter

Туре	65 W
Input voltage	100 VAC-240 VAC
Input frequency	50 Hz-60 Hz
Input current (maximum)	1.50 A
Output current (continuous)	3.34 A
Rated output voltage	19.50 VDC
Temperature range:	
Operating	0°C to 40°C (32°F to 104°F)
Storage	-40°C to 70°C (-40°F to 158°F)



Computer Environment

Airborne contaminant level	G1 as defined by ISA-S71.04-1985	
	Operating	Storage
Temperature range	0°C to 35°C (32°F to 95°F)	–40°C to 65°C (–40°F to 149°F)
Relative humidity (maximum)	10% to 90% (non-condensing)	0% to 95% (non-condensing)
Vibration (maximum)*	0.66 GRMS	1.30 GRMS
Shock (maximum)	110 G [†]	160 G [‡]
Altitude (maximum)	–15.2 m to 3048 m (–50 ft to 10,000 ft)	–15.2 m to 10,668 m (–50 ft to 35,000 ft)

* Measured using a random vibration spectrum that simulates user environment

† Measured using a 2 ms half-sine pulse when the hard drive is in use.

‡ Measured using a 2 ms half-sine pulse when the hard-drive head is in parked position.

