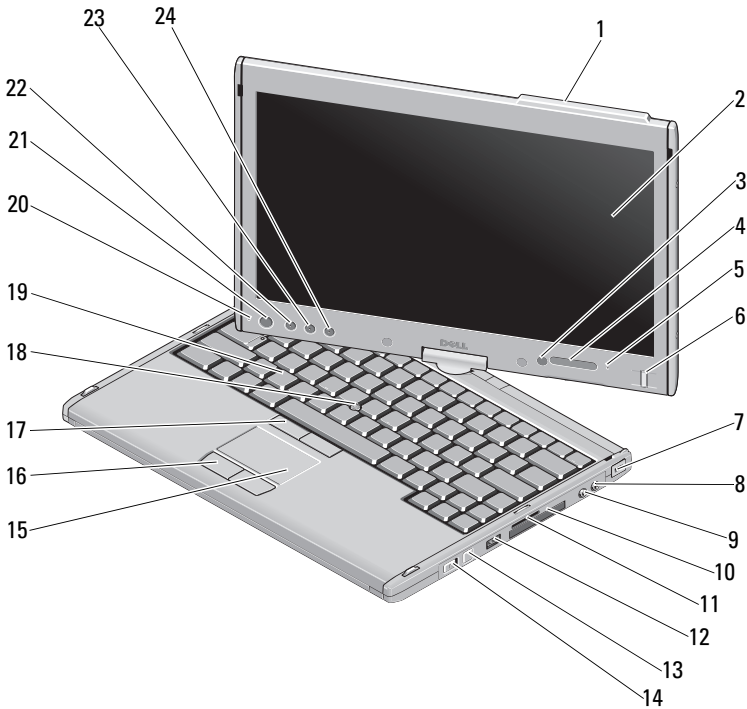# About Warning

⚠ **WARNING: A WARNING indicates a potential for property damage, personal injury, or death.**

Dell™ Latitude™ XT2
Setup and Features Information

Front and Right View

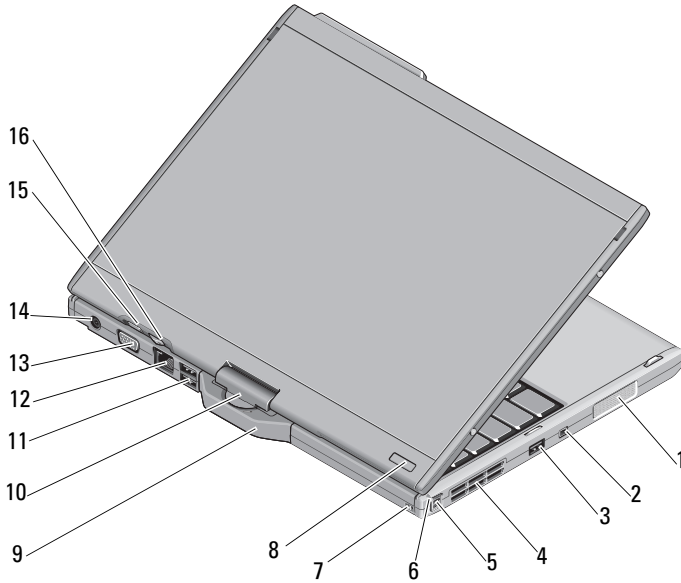|			
1	antenna bump (WWAN enabled)	2	display
3	ambient light sensor	4	device status lights
5	digital array microphone	6	biometric reader
7	security cable slot	8	microphone connector
9	headphones connector	10	ExpressCard slot
11	Secure Digital (SD) card slot	12	USB/e-SATA combo connector
13	Wi-Fi Catcher™ button	14	wireless radio on/off switch
15	touch pad	16	touch pad buttons
17	track stick buttons	18	track stick
19	keyboard	20	digital array microphone
21	power button	22	Windows® security button
23	screen rotate button	24	Dell Control Point (DCP) button

NOTE: The Antenna Bump is available only on WWAN enabled systems. In the absence of the Antenna Bump, there will be a Grip on top of the display.

NOTE: Press <Fn><F9> to toggle between WLAN and WWAN. Latitude XT2 does not support simultaneous operation of WLAN and WWAN modes.

Back and Left View

1	speaker	2	IEEE 1394 connector
3	USB connector (for power share)	4	air vent
5	pen	6	pen indicator LED
7	pen tether slot	8	power HDD indicator
9	tablet grip	10	rotating hinge
11	powered USB connector	12	network connector
13	video connector	14	AC adapter connector
15	tablet back button	16	scroll control button

⚠️ **WARNING: Do not block, push objects into, or allow dust to accumulate in the air vents. Do not store your Dell™ computer in a low-airflow environment, such as a closed briefcase, while it is running. Restricting the airflow can damage the computer or cause a fire. The computer turns on the fan when the computer gets hot. Fan noise is normal and does not indicate a problem with the fan or the computer.**

Quick Setup

⚠️ **WARNING: Before you begin any of the procedures in this section, read the safety information that shipped with your computer. For additional best practices information see www.dell.com/regulatory_compliance.**

⚠️ **WARNING: The AC adapter works with electrical outlets worldwide. However, power connectors and power strips vary among countries. Using an incompatible cable or improperly connecting the cable to the power strip or electrical outlet may cause fire or equipment damage.**

⚠️ **CAUTION: When you disconnect the AC adapter cable from the computer, grasp the connector, not the cable itself, and pull firmly but gently to avoid damaging the cable. When you wrap the AC adapter cable, ensure that you follow the angle of the connector on the AC adapter to avoid damaging the cable.**

📝 **NOTE:** Some devices may not be included if you did not order them.

1 Connect the AC adapter to the AC adapter connector on the computer and to the electrical outlet.
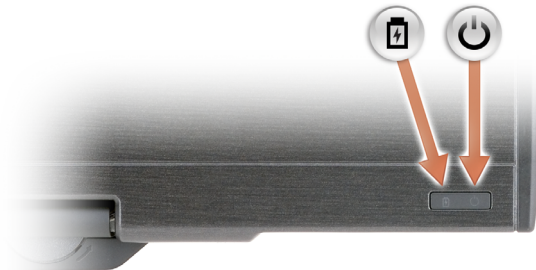
2 Connect the network cable.

3 Connect USB devices, such as a mouse or keyboard.

4 Connect IEEE 1394 devices, such as a DVD player.

5 Open the computer display and press the power button to turn on the computer.

- ⏻   Power button
- 🔋   Battery charge indicator

📝 **NOTE:** It is recommended that you turn on and shut down your computer at least once before you install any cards or connect the computer to a docking device or other external device, such as a printer.

Specifications

📝 **NOTE:** Offerings may vary by region. For more information regarding the configuration of your computer, click Start→ **Help and Support** and select the option to view information about your computer.

Video	
Video type:	integrated on system board, hardware accelerated
Data bus	integrated video
Video controller	Intel® Integrated "Cantiga" UMA Graphics
Video memory	up to 256 MB shared video memory

Battery	
Type	4-cell "smart" lithium ion (28 WHr) 6-cell "smart" lithium ion (42 WHr)
Dimensions:	
Depth	96.84 mm (3.81 inches)
Height	13.7 mm (0.54 inch)
Weight	0.26 kg (0.57 lb) (4 cell) 0.34 kg (0.74 lb) (6 cell)
Voltage	11.1 VDC
Temperature range:	
Operating	0° to 35°C (32° to 95°F)
Storage	–40° to 65°C (–40° to 149°F)
Coin-cell battery	CR-2025

AC Adapter	
Input voltage	100–240 VAC
Input current (maximum)	1.5 A
Input frequency	50–60 Hz
Output current	2.31 A 2.34 A (optional) 4.62 A (optional)

AC Adapter *(continued)*

Output power	45 W, 65W (optional) or 90W (optional)
Rated output voltage	19.5 VDC
Dimensions:	
Height	16.0 mm (0.63 inches)
Width	63.0mm (2.48 inches)
Depth	88.0 mm (3.46 inches)
Temperature range:	
Operating	0° to 40°C (32° to 1.04°F)
Storage	–10° to 70°C (–50° to 158°F)

Physical

Height	25.4 mm (1.0 inch)
Width	297.0 mm (11.7 inches)
Depth	218.6 mm (8.6 inches)
Weight	1.66 kg (3.66 lb) (with 4-cell battery/LED standard configuration) 1.737 kg (3.83 lb) (with 6-cell battery/DLV standard configuration)

Environmental

Temperature range:	
Operating	0° to 35°C (32° to 95°F)
Storage	–40° to 65°C (–40° to 149°F)
Relative humidity (maximum):	
Operating	10% to 90% (noncondensing)
Storage	5% to 95% (noncondensing)
Altitude (maximum):	
Operating	–15.2 to 3048 m (–50 to 10,000 ft)
Storage	–15.2 to 10,668 m (–50 to 35,000 ft)

Finding More Information and Resources

If you need to:	See:
find safety best practices information for your computer review Warranty information, Terms and Conditions(U.S only), Safety instructions, Regulatory information, Ergonomics information, and End User License Agreement.	the safety and regulatory documents that shipped with your computer and also see the Regulatory Compliance Homepage at **ww.dell.com/regulatory_compliance.**

————————————