




I/O Module Installation Order Guidelines

When installing I/O modules or blanks in the I/O module bays in the back of your system enclosure, you must install them in right-to-left order:

- A module (or blank) must be installed in bay A2, then bay B2, then bay C2.
- Next, a module (or blank) must be installed in bay C1, then bay B1, then bay A1.

For detailed information on installing the I/O modules in your system, see "Guidelines for Installing I/O Modules" and "Installing I/O Modules" in your *Hardware Owner's Manual*.

Figure 1. I/O Module Bay Numbering

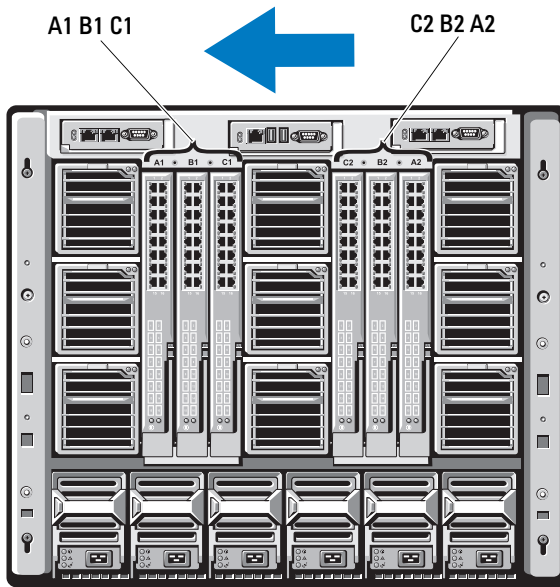

January 2008



0U431DA00

Information in this document is subject to change without notice.

© 2008 Dell Inc. All rights reserved. Printed in the U.S.A.

Reproduction in any manner whatsoever without the written permission of Dell Inc. is strictly forbidden.

Trademarks used in this text: *Dell* and the *DELL* logo are trademarks of Dell Inc.

Other trademarks and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Dell Inc. disclaims any proprietary interest in trademarks and trade names other than its own.