

Del I™ Photo All-In-One Printer 926用户手册

如要从Del I 订购打印墨盒或耗材：

1. 双击您的计算机桌面上的图标。





2. 访问Del I 的国际互联网站或者拨打电话订购Del I 打印机耗材。


www.dell.com/supplies

要获得最好的服务，请准备好您的Del I 打印机服务编号。

注意、通告和当心

 **注意：** 表示重要的信息，可以帮助您更好地使用您的打印机。

 **通告：** 表示有可能损坏硬件或丢失数据，并告诉您如何避免这些问题。

 **当心：** 表示有可能发生财产损失、人身伤害或死亡等危险。

本文档中的信息可能会随时改变，恕不另行通知。

© 2006 Dell Inc. All rights reserved. 保留所有权利。

未经过Dell Inc. 的书面许可，任何方式的复制都是严格禁止的。

商标应按照以下的文字使用：Dell、DELL徽标、Dell Picture Studio和Dell墨水管理系统都是Dell Inc. 的商标；Microsoft和Windows都是Microsoft Corporation的注册商标。

本文档中可能会使用其他的商标和商标名称，代表注册该商标和名称的实体或他们的产品。对于不属于自己的商标和商标名称，Dell Inc. 否认具有所有权。

UNITED STATES GOVERNMENT RESTRICTED RIGHTS

This software and documentation are provided with RESTRICTED RIGHTS. Use, duplication or disclosure by the Government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.227-7013 and in applicable FAR provisions: Dell Inc., One Dell Way, Round Rock, Texas, 78682, USA


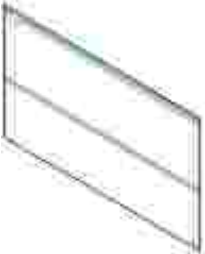
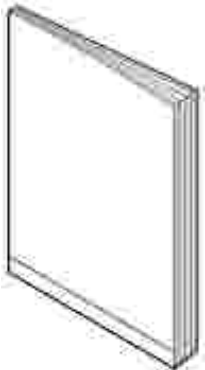
型号 926

2006年7月

SRV NU119

Rev. A00

获取更多的信息


您正在找什么？	可以从这里得到：
<ul style="list-style-type: none">• 我的打印机的驱动程序• 我的用户手册	<p><i>Drivers and Utilities</i>光盘</p>  <p>如果您同时购买了Dell计算机和打印机，打印机文档和驱动程序已经安装在您的计算机上。您可以使用光盘反安装 / 重新安装驱动程序或者浏览您的文档。自述文件可能包含在您的光盘中，此文件为有经验的用户或技术员提供有关打印机的最新技术变更信息 and 高级技术参考资料。</p>
如何安装我的打印机	<p>安装您的打印机 海报</p> 
<ul style="list-style-type: none">• 安全信息• 如何安装和使用我的打印机• 保修信息	<p>用户指南</p> 
服务序列号和服务编号	服务序列号和服务编号

您正在找什么？	可以从这里得到：
	 <p>此标签位于打印机上（如下图所示）。</p> 
<ul style="list-style-type: none"> • 我的打印机的最新驱动程序 • 技术服务和支持问题的回答 • 我的打印机的文档 	<p>Dell 技术支持网站：www.support.dell.com</p> <p>Dell 技术支持网站提供了多种在线工具，包括：</p> <ul style="list-style-type: none"> • 解决方案 - 问题解答提示、专家撰写的文章和在线教程 • 升级 - 部件升级信息，例如内存 • 客户服务 - 联系信息、订购状态、保修和维修信息 • 下载 - 驱动程序 • 参考资料 - 打印机文档和产品规格
如何使用 Windows XP	<p>Windows XP帮助和支持中心</p> <ol style="list-style-type: none"> 1. 单击开始→ 帮助和支持。 2. 根据您的输入适当的字或短语，然后单击箭头按钮。 3. 单击与您的问题最相符的主题。 4. 按照计算机屏幕上的指导进行操作。

关于您的打印机

- [了解打印机部件](#)
- [了解操作面板](#)


了解打印机部件

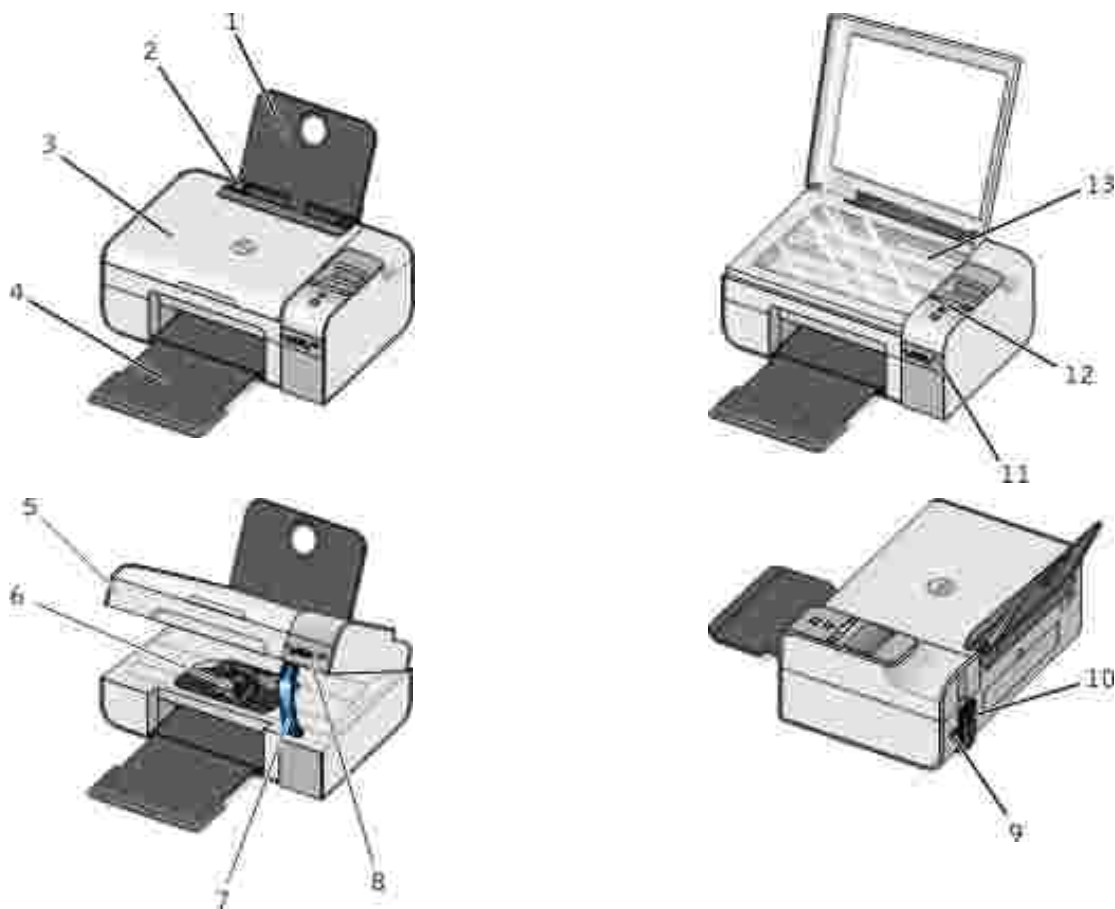

编号：	部件：	说明：
1	纸张支架	支撑装入打印机内的纸张以保持平整。
2	进纸导轨	确保纸张能够正确地进入打印机内。
3	顶盖	打印机的顶部，当您进行扫描时可以保证文档或照片平整。

编号：	部件：	说明：
4	出纸托盘	盛放打印机送出的打印页。
5	打印机单元	抬起打印机单元可以露出打印墨盒。
6	打印墨盒拖车	用于安装打印墨盒。一个安装彩色打印墨盒，另一个安装黑色或照片打印墨盒。请参阅 更换打印墨盒 获取更多的信息。
7	扫描仪支架	位于打印机单元的下面，当您更换打印墨盒时可以保持打印机单元打开。 注意： 如要关闭打印机单元并恢复正常操作，请抬起打印机单元，向后推扫描仪支架，然后放下打印机单元，直到稳定支撑在打印机的主体上。
8	存储卡插槽	用于插入包含数码照片的存储卡。
9	USB插口	用于连接USB电缆（另外单独销售）。USB电缆的另一端连接在您的计算机上。
10	电源插口	用于连接电源线。 当心： 在将电源线连接到电源插座之前，请先将电源线的另一端插入此插口内。
11	Pict Bridge插口	用于将Pict Bridge兼容数码相机连接在打印机上。
12	操作面板	打印机上的面板，您可以使用上面的按钮进行复印、扫描、传真和打印操作。请参阅 了解操作面板 获取更多的信息。
13	扫描仪玻璃	您可以将您的文档原件或照片正面朝下放置在扫描仪玻璃上进行复印、传真或扫描。

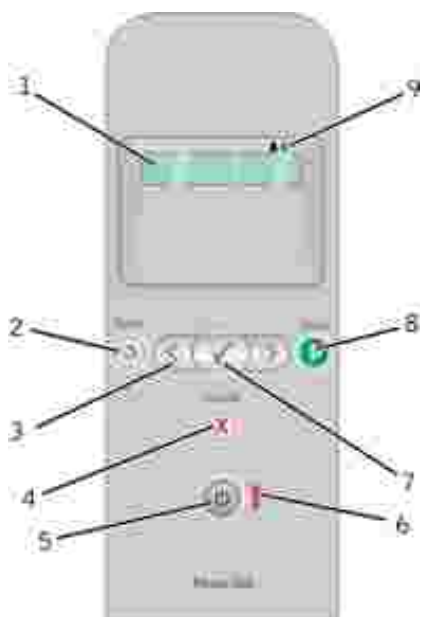


了解操作面板



编号 :	使用 :		您可以 :
1	显示屏		显示扫描、复印、传真和打印选项, 以及打印机状态和错误信息。
2	“返回” 按钮		返回到上一级菜单。
3	箭头按钮	 	<ul style="list-style-type: none"> 浏览模式、菜单和菜单项。 增大或减小数值选项。 浏览存储卡或数码相机中的照片和Microsoft Office文件。
4	“取消” 按钮		<ul style="list-style-type: none"> 取消正在进行的扫描、打印或复印作业。 退出菜单, 不保存菜单设置的改变。
5	“电源” 按钮		<p>打开或关闭您的打印机的电源。</p> <p>注意: 如果PictBridge兼容数码相机连接在打印机的PictBridge插口上并且正在工作, 按“电源”按钮将不会关闭您的打印机。</p>
6	错误状态 LED		检查是否发生了错误。
7	“选择” 按钮		<ul style="list-style-type: none"> 进入当前显示的菜单。 选择菜单选项。 按住此按钮3秒钟可以送入或送出纸张。
8	“开始” 按钮		开始复印、扫描或传真操作。
9	墨滴图标		<p>查看图标下面的字符可以检查 :</p> <ul style="list-style-type: none"> 打印墨盒内的剩余墨水量。 缺少或无效的打印墨盒。

操作面板菜单

- [复印模式](#)
- [扫描模式](#)
- [传真模式](#)
- [照片模式](#)
- [Pi ct Br i dge模式](#)
- [办公文件模式](#)
- [蓝牙模式](#)
- [维护模式](#)

当您反复按左右箭头按钮   时，以下的模式将会依次出现。当您希望使用的模式出现在显示屏上时，请按“开始”按钮  进入相应的菜单。






复印模式

复印模式菜单项：	设置：
复印色彩	<ul style="list-style-type: none">● 彩色● 黑白
份数	1-99
质量	<ul style="list-style-type: none">● 自动● 高速● 正常● 照片
深浅	按“选择”按钮  ，然后反复按左右箭头按钮   调节深浅设置。
纸张尺寸	<ul style="list-style-type: none">● Letter● Legal● 4 x 6 英寸● A4● B5● A5● A6● L● 2L● Hagaki


复印模式菜单项：	设置：
	<ul style="list-style-type: none"> • 3 x 5 英寸 • 3.5 x 5 英寸 • 10 x 15 厘米 • 5 x 7 英寸 • 13 x 18 厘米
纸张类型	<ul style="list-style-type: none"> • 自动 • 普通纸 • 涂层纸 • 照片纸 • 透明胶片
缩放	<ul style="list-style-type: none"> • 100% • 125% • 150% • 175% • 200% • 4 x 6 英寸 • 5 x 7 英寸 • Letter • A4 • B5 • L • 2L • Hagaki • 25% • 50% • 75%
修正歪斜	<ul style="list-style-type: none"> • 关 • 开

扫描模式

只有当您的打印机连接在计算机或网络适配器上时，打印机才会进入扫描模式。





扫描模式菜单项：	设置：
扫描色彩	<ul style="list-style-type: none"> • 彩色 • 黑白
扫描至	<ul style="list-style-type: none"> • 反复按左右箭头按钮   选择您希望将扫描的文档发送到哪一个应用程序。 • 如果您的打印机连接在网络中，请反复按左右箭头按钮   浏览可用的计算机，然后按“选择”按钮  显示该计算机上可用的应用程序列表。

传真模式

传真模式菜单项：	设置：
* 出厂默认设置	
传真色彩	<ul style="list-style-type: none">• * 黑白• 彩色
开始传真	按“开始”按钮  开始传真。


照片模式

只有当存储卡插入打印机内，或者USB闪存驱动器或PictBridge兼容数码相机连接在打印机的PictBridge插口上时，打印机才会进入照片模式。

照片模式菜单项：	设置：
* 出厂默认设置	
样张页	<ul style="list-style-type: none">• 在“打印样张页”子菜单中，反复按左右箭头按钮  从以下的设置中进行选择：<ul style="list-style-type: none">○ 所有○ 最后25张○ 日期范围• 在“扫描样张页”子菜单中，按“开始”按钮  开始扫描样张页。请参阅使用样张页打印照片获取更多的信息。
打印DPOF 注意： 只有当包含DPOF（数码打印序列格式）图像的存储卡插入打印机内，或者包含DPOF图像的PictBridge兼容数码相机连接在打印机的PictBridge插口上时，此菜单项才会出现。	按“开始”按钮  将会打印存储卡中的所有DPOF图像。请参阅 从PictBridge兼容数码相机中打印照片 获取更多的信息。
照片色彩	<ul style="list-style-type: none">• * 彩色• 黑白• 棕褐色• 仿古
照片选项	<ul style="list-style-type: none">• 红眼• 自动增强
保存到计算机	按“选择”按钮  将会打开存储卡管理器。请参阅 使用存储卡管理器 获取更多的信息。
打印图像	按“选择”按钮  将会打印保存在存储卡、USB闪存驱动器或PictBridge兼容数码相机中的所有图像。
照片尺寸	<ul style="list-style-type: none">• * 4 x 6 英寸• 5 x 7 英寸

照片模式菜单项：	设置：
	<ul style="list-style-type: none"> ● 8 x 10 英寸 ● L ● 2L ● 6 x 8 厘米 ● 10 x 15 厘米 ● 13 x 18 厘米 ● 8.5 x 11 英寸 ● A4 ● A5 ● B5 ● A6 ● Hagaki ● Wallet ● 3.5 x 5 英寸
纸张尺寸	<ul style="list-style-type: none"> ● * 8.5 x 11 英寸 ● 8.5 x 14 英寸 ● 4 x 6 英寸 ● A4 ● B5 ● A5 ● A6 ● L ● 2L ● Hagaki ● 3 x 5 英寸 ● 3.5 x 5 英寸 ● 10 x 15 厘米 ● 5 x 7 英寸 ● 13 x 18 厘米
质量	<ul style="list-style-type: none"> ● * 自动 ● 高速 ● 正常 ● 照片
纸张类型	<ul style="list-style-type: none"> ● * 自动 ● 普通纸 ● 涂层纸 ● 照片纸 ● 透明胶片

Pict Bridge模式




 **注意：** 只有当Pict Bridge兼容数码相机连接在打印机的Pict Bridge插口上时，打印机才会进入Pict Bridge模式。

Fict Bridge菜单项：	设置：
* 出厂默认设置	
质量	<ul style="list-style-type: none"> ● * 自动 ● 高速 ● 正常 ● 照片
照片尺寸	<ul style="list-style-type: none"> ● * 4 x 6 英寸 ● 5 x 7 英寸 ● 8 x 10 英寸 ● L ● 2L ● 6 x 8 厘米 ● 10 x 15 厘米 ● 13 x 18 厘米 ● 8.5 x 11 英寸 ● A4 ● A5 ● B5 ● A6 ● Hagaki ● Vållet ● 3.5 x 5 英寸
纸张尺寸	<ul style="list-style-type: none"> ● * 8.5 x 11 英寸 ● 8.5 x 14 英寸 ● 4 x 6 英寸 ● A4 ● B5 ● A5 ● A6 ● L ● 2L ● Hagaki ● 3 x 5 英寸 ● 3.5 x 5 英寸 ● 10 x 15 厘米 ● 5 x 7 英寸 ● 13 x 18 厘米
纸张类型	<ul style="list-style-type: none"> ● * 自动 ● 普通纸 ● 涂层纸 ● 照片纸 ● 透明胶片
照片色彩	<ul style="list-style-type: none"> ● * 彩色 ● 黑白 ● 棕褐色 ● 仿古




Fict Bridge 菜单项：	设置：
照片选项	<ul style="list-style-type: none"> • 红眼 • 自动增强

办公文件模式


使用办公文件模式可以打印保存在存储卡或USB闪存驱动器中的Microsoft Office文件。



办公文件模式菜单项：	设置：
选择文件	反复按左右箭头按钮   浏览保存在您的存储卡或USB闪存驱动器中的文件夹和Microsoft™ Office文件。按“选择”按钮  可以显示文件夹的内容或者选择您希望打印的文件。

蓝牙模式

蓝牙模式菜单项：	设置：
启用	<ul style="list-style-type: none"> • 关 • 开
发现	<ul style="list-style-type: none"> • 关 • 开
打印机名称	您的打印机名称按照以下格式出现在显示屏上：Del I 926 - 服务编号#。 注意： 名称将会出现在打印机列表中，该列表列出了所有使用蓝牙无线规范连接到您的计算机的设备。
安全等级	<ul style="list-style-type: none"> • 高 • 低 注意： 如果您选择了“高”，“输入密码”子菜单项将会出现。请反复按左右箭头按钮   为密码的每一位选择数字0-9。按“选择”按钮  确定该位数字。
设备列表	<ul style="list-style-type: none"> • 清除 • 保存

维护模式

维护模式菜单项：	设置：
校正打印墨盒	按“选择”按钮  。

维护模式菜单项：	设置：
清洗打印墨盒	按“选择”按钮  。
打印测试页	按“选择”按钮  。
清除设置	<ul style="list-style-type: none">• 2分钟之后• 从不
设置默认值	<ul style="list-style-type: none">• 使用出厂设置• 使用当前设置• 日期格式• 语言

装入纸张和文档原件

- [在纸张支架内装入纸张](#)
- [了解自动纸张类型传感器](#)
- [将文档原件放置在扫描仪玻璃上](#)


在纸张支架内装入纸张


1. 请确认纸张没有粘在一起。




2. 在纸张支架的正中间位置装入纸张。

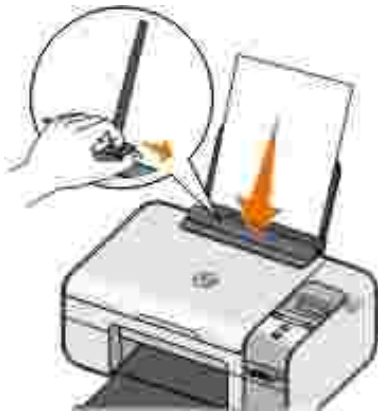


3. 调节进纸导轨，使之紧靠纸张的边缘。



 **注意：** 请不要同时移动两边的进纸导轨。当您移动一边的进纸导轨时，另一边的进纸导轨也会相应地移动。

 **注意：** 请不要用力将纸张塞入打印机内。纸张应该平整地放置在纸张支架的表面上，并且纸张的边缘应该紧靠两边的进纸导轨。

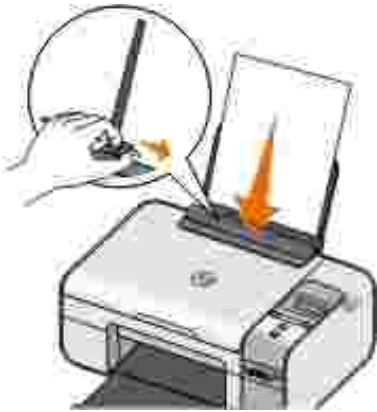打印介质指导

最多可以装入：	请确认：
<p>100张普通纸</p> 	<ul style="list-style-type: none"> ● 进纸导轨紧靠纸张的边缘。 ● 如要装入印有页眉的信纸，请确认要打印的一面朝上，然后将信纸的顶端装入打印机内。
<p>100张涂层纸</p>	<ul style="list-style-type: none"> ● 要打印的一面朝上。 ● 进纸导轨紧靠纸张的边缘。 ● 您选择了“自动”、“正常”或“照片”打印质量。
<p>20张横幅纸</p> 	<ul style="list-style-type: none"> ● 在装入横幅纸之前，请从纸张支架内取出所有的纸张。 ● 您使用的是喷墨打印机专用的横幅纸。 ● 将整摞横幅纸放置在打印机的上面或后面，然后将第一页的页首装入打印机内。 ● 进纸导轨紧靠横幅纸的边缘。 ● 您选择了“A4横幅”或“Let t er横幅”纸张尺寸。
<p>10个信封</p> 	<ul style="list-style-type: none"> ● 要打印的一面朝上。 ● 进纸导轨紧靠信封的边缘。 ● 您选择了“横向打印”设置打印信封。 <p>注意： 如果您在日本境内邮寄，您可以选择纵向打印，贴邮票的位置位于右下角；或者选择横向打印，贴邮票的位置位于左下角。如果您要向其他国家邮寄，请选择横向打印，贴邮票的位置位于左上角。</p> <ul style="list-style-type: none"> ● 您选择了正确的信封尺寸。如果列表中没有完全符合的信封尺寸，请选择稍大一点的尺寸，然后设置适当的左边距和右边距，以确保您要打印的内容能够打印在信封的正确位置上。
<p>25张标签纸</p>	<ul style="list-style-type: none"> ● 要打印的一面朝上。 ● 进纸导轨紧靠纸张的边缘。 ● 您选择了“自动”、“正常”或“照片”打印质量。

最多可以装入：	请确认：
25张贺卡专用纸、索引卡、明信片或照片卡	<ul style="list-style-type: none"> ● 要打印的一面朝上。 ● 进纸导轨紧靠卡片纸的边缘。 ● 您选择了“自动”、“正常”或“照片”打印质量。
25张照片 / 光面纸或涂层纸	<ul style="list-style-type: none"> ● 要打印的一面朝上。 ● 进纸导轨紧靠纸张的边缘。 ● 您选择了“自动”、“正常”或“照片”打印质量。
1张热转印纸	<ul style="list-style-type: none"> ● 请按照包装上的指导装入热转印纸。 ● 要打印的一面朝上。 ● 进纸导轨紧靠热转印纸的边缘。 ● 您选择了“自动”、“正常”或“照片”打印质量。
50张透明胶片	<ul style="list-style-type: none"> ● 粗糙的一面朝上。 ● 进纸导轨紧靠透明胶片的边缘。


了解自动纸张类型传感器

您的打印机带有一个自动纸张类型传感器，可以自动检测以下的纸张类型：

- 普通纸 / 涂层纸
- 透明胶片
- 照片 / 光面纸

如果您装入了以上类型的纸张，打印机可以自动检测纸张类型，并自动调整到最佳的质量 / 速度设置。

纸张类型	质量 / 速度设置	
	安装黑色和彩色打印墨盒	安装照片和彩色打印墨盒
普通纸 / 涂层纸	正常	照片
透明胶片	正常	照片
照片 / 光面纸	照片	照片

 **注意：** 您的打印机不能自动检测纸张尺寸。

如要选择纸张尺寸：

1. 打开您的文档，从应用程序中单击“文件→打印”。

“打印”对话框将会出现。

2. 单击“首选项”、“属性”、“选项”或“设置”（取决于您的应用程序或者操作系统）。

打印首选项界面将会出现。

3. 在“打印设置”选项卡中选择适当的纸张尺寸。
4. 单击“确定”。

通常情况下，自动纸张类型传感器一直是启用的，除非您关闭它。如要为特定的打印作业关闭自动纸张类型传感器：

1. 打开您的文档，从应用程序中单击“文件→打印”。

“打印”对话框将会出现。

2. 单击“首选项”、“属性”、“选项”或“设置”（取决于您的应用程序或者操作系统）。

打印首选项界面将会出现。

3. 在“打印设置”选项卡中选择您使用的纸张类型。
4. 单击“确定”。

如要为所有的打印作业关闭自动纸张类型传感器：

1. *Windows XP*: 单击开始→控制面板→打印机和其他硬件→打印机和传真。

Windows 2000: 单击开始→设置→打印机。

2. 右键单击打印机图标。
 3. 单击“打印首选项”。
 4. 在“打印设置”选项卡中选择您使用的纸张类型。
 5. 单击“确定”。
-

将文档原件放置在扫描仪玻璃上




您可以复印、扫描和打印照片、文本文档、杂志文章、报纸以及其他的印刷品。您也可以扫描文档并发送传真。

1. 请确认打印机的电源已打开。
2. 打开顶盖。
3. 将文档原件正面朝下放置在扫描仪玻璃的右下角。
4. 关闭顶盖，以避免扫描结果中出现黑边。

打印


- [打印文档](#)
- [打印照片](#)
- [打印信封](#)
- [从PictBridge兼容数码相机中打印照片](#)
- [从存储卡或USB闪存驱动器中打印照片](#)
- [从蓝牙设备中进行打印](#)

 **注意：** Dell™建议您使用彩色打印墨盒和照片打印墨盒打印照片。


打印文档

1. 打开您的计算机和打印机的电源，并确认它们已正确连接。
 2. 装入纸张。请参阅[在纸张支架内装入纸张](#)获取更多的信息。
 3. 打开您的文档，从应用程序中单击“文件→打印”。
“打印”对话框将会出现。
 4. 单击“首选项”、“属性”、“选项”或“设置”（取决于您的应用程序或者操作系统）。
打印首选项界面将会出现。
 5. 在“打印设置”和“高级”选项卡中，为您的文档改变需要的设置。
 6. 当您完成了打印设置的定制后，请单击“确定”。
打印首选项界面将会关闭。
 7. 单击“确定”或“打印”。
-

打印照片

 **注意：** Dell 建议您使用彩色打印墨盒和照片打印墨盒打印照片。

1. 打开您的计算机和打印机的电源，并确认它们已正确连接。
2. 装入照片 / 光面纸，并确认要打印的一面朝上。


 **注意：** 推荐使用照片 / 光面纸打印照片。

3. 打开您的文档，从应用程序中单击“文件→打印”。


“打印”对话框将会出现。

4. 单击“首选项”、“属性”、“选项”或“设置”（取决于您的应用程序或者操作系统）。

打印首选项界面将会出现。

 **注意：** 如果您使用的是 Dell Picture Studio™，请单击“查看所有的打印机设置”打开打印首选项。

5. 在“打印设置”选项卡中选择“照片”，然后从下拉列表中选择适当的dpi数值。

 **注意：** 如要打印无边界照片，请在“打印设置”选项卡中选中“无边界”，然后选择“高级”选项卡，从下拉列表中选择适当的无边界纸张尺寸。只有当您使用照片 / 光面纸时才可以进行无边界打印。其他纸张上的打印结果每边都会有至少2毫米的边距。


6. 在“打印设置”和“高级”选项卡中，为您的文档改变其他需要的设置。

7. 当您完成了打印设置的定制后，请单击“确定”。

打印首选项界面将会关闭。

8. 单击“确定”或“打印”。

9. 为了避免您的照片粘在一起或者被墨水弄脏，请随时移开打印机送出的照片。

 **注意：** 在将您打印的照片装入相册或镜框之前，请等待足够长的时间（12-24小时，取决于周围的环境），以确保照片完全干燥。这样做可以保证照片的寿命最长。

打印信封

1. 打开您的计算机和打印机的电源，并确认它们已正确连接。
2. 装入信封，并确认要打印的一面朝上。




3. 打开您的文档，从应用程序中单击“文件→打印”。

“打印”对话框将会出现。

4. 单击“首选项”、“属性”、“选项”或“设置”（取决于您的应用程序或者操作系统）。

打印首选项界面将会出现。

5. 在“打印设置”选项卡中选择“横向打印”。

 **注意：** 如果您在日本境内邮寄，您可以选择纵向打印，贴邮票的位置位于右下角；或者选择横向打印，贴邮票的位置位于左下角。如果您要向其他国家邮寄，请选择横向打印，贴邮票的位置位于左上角。

6. 在“打印设置”和“高级”选项卡中，为您的文档改变其他需要的设置。

7. 当您完成了打印设置的定制后，请单击“确定”。

打印首选项界面将会关闭。

8. 单击“确定”或“打印”。

从Pict Bridge兼容数码相机中打印照片

1. 将USB电缆的一端连接在数码相机上。
2. 将USB电缆的另一端插入打印机前面的PictBridge插口中。




请参阅随同您的数码相机一起的说明文档了解如何选择适当的相机USB设置以及PictBridge连接和使用等方面的信息。



3. 打开您的数码相机。

打印机自动进入PictBridge模式。

注意： 当您的打印机没有连接在计算机上，并且PictBridge兼容数码相机连接在您的打印机上时，您的打印机操作面板按钮的部分功能将无法使用。当您将PictBridge兼容数码相机从打印机上断开后，这些功能将恢复正常工作。

4. 反复按左右箭头按钮   选择打印设置，然后按“选择”按钮 。请参阅[PictBridge模式](#)获取更多的信息。

注意： 如果您选择使用打印机改变打印设置，在数码相机上选择的一些打印设置可能会改变。

5. 请参阅随同您的数码相机一起的说明文档开始打印照片。

注意： 大部分的数码相机有两种USB模式可供选择：计算机和打印机（或PTP）。对于上文所述的PictBridge打印来说，应该选择打印机（或PTP）USB模式。请参阅随同您的数码相机一起的说明文档获取更多的信息。

通告： 请不要在指示灯闪烁时断开USB电缆，或者触摸打印机PictBridge插口附近的区域。


从存储卡或USB闪存驱动器中打印照片

大多数的数码相机使用存储卡保存照片。您的打印机可以支持以下的数码存储卡：

- Compact Flash I型 / II型
- Memory Stick

- Memory Stick PRO
- Memory Stick Duo
- Microdrive
- Secure Digital
- MultiMedia Card
- xD-Picture Card

插入存储卡时应使带有标签的一面朝上。打印机上的读卡器带有四个插槽，分别适用于不同的存储卡。另外还有一个指示灯，闪烁时表示正在读取存储卡或者正在传输数据。

 **警告：** 请不要在指示灯闪烁时取出存储卡，或者触摸打印机的存储卡区域。



打印机前面的Pict Bridge插口也可以用于读取保存在USB闪存驱动器中的信息。以下的USB闪存驱动器已经被证明可以连接在此打印机上使用：

- DELL-256 MB 高速 USB 2.0 Memory Key
- DELL-128 MB 高速 USB 2.0 Memory Key
- DELL-64 MB 高速 USB 2.0 Memory Key

当您插入存储卡或USB闪存驱动器后，打印机自动进入照片模式。

 **注意：** 请不要同时插入多种存储卡或USB闪存驱动器。




 **注意：** 打印机支持FAT32数据格式。以NTFS格式保存的文件必须转换成FAT32数据格式。

打印存储卡或USB闪存驱动器中所有的照片


1. 插入存储卡或USB闪存驱动器。


打印机自动进入照片模式。

2. 按“选择”按钮  进入“照片菜单”。

3. 反复按左右箭头按钮   选择“打印图像”，然后按两次“选择”按钮 .

打印机将会打印存储卡或USB闪存驱动器中所有的照片。

 **注意：** 如果您希望只打印存储卡或USB闪存驱动器中的一部分照片，请使用样张页选择您希望打印的照片。请参阅[使用样张页打印照片](#)获取更多的信息。


 **注意：** 只有JPG格式和一部分TIFF格式的照片才可以直接从存储卡或USB闪存驱动器中打印。如果您希望打印保存在存储卡或USB闪存驱动器中的其他格式的照片，您必须首先将照片保存到您的计算机上，然后再打印。

使用样张页打印照片




1. 装入Letter或A4尺寸的普通纸。



2. 插入存储卡或USB闪存驱动器。

显示屏上将会出现“样张页”。


 **注意：** 只有JPG和TIFF格式的照片才可以直接从存储卡或USB闪存驱动器中打印。如果您希望打印保存在存储卡或USB闪存驱动器中的其他格式的照片，您必须首先将照片保存到您的计算机上，然后再打印。请参阅[将存储卡或USB闪存驱动器中的照片保存到您的计算机上](#)获取更多的信息。

3. 按“选择”按钮  进入“样张页”菜单。

4. 反复按左右箭头按钮   选择“打印样张页”，然后按“选择”按钮 .

5. 反复按左右箭头按钮   选择您希望在样张页上打印哪些照片。


选择：	您可以：
所有	在样张页上打印存储卡或USB闪存驱动器中的所有照片。
最后25张	在样张页上打印最近的25张照片。
日期范围	只打印指定日期范围内拍摄的照片。
注意： 您可以选择多个日期范围。所有选择的日期范围左边将会出现一个*标记。	

6. 按“开始”按钮 。

打印机开始打印样张页。


7. 按照样张页上的指导选择要打印的照片、版面和您要使用的纸张类型。


填满照片下面带有红眼图标的圆圈可以在打印照片时去除照片中的红眼。



 **注意：** 当您进行选择时，请确认完全填满圆圈。


8. 将样张页正面朝下放置在扫描仪玻璃上。请参阅[将文档原件放置在扫描仪玻璃上](#)获取更多的信息。

9. 装入纸张。

 **注意：** 请确认您在打印机内装入的纸张尺寸与您在样张页的第1部分中选择的纸张尺寸一致。

 **注意：** 推荐使用照片 / 光面纸打印照片。


10. 反复按左右箭头按钮  选择“扫描样张页”，然后按“开始”按钮 。

 **警告：** 请不要取出存储卡或者关闭打印机，直到您在样张页中选择的照片全部打印完毕。如果从打印机内取出存储卡或者关闭打印机电源，样张页将会失效。


使用DPOF从数码相机中打印照片



一些数码相机提供了数码打印序列格式(DPOF)功能，可以允许您在存储卡上保存打印设置信息，和您希望打印的照片保存在一起。如果您的数码相机支持DPOF，则您可以指定打印存储卡中的哪些照片、打印份数、以及其他的打印设置。当您存储卡插入打印机以后，打印机可以识别这些设置。

1. 装入照片纸或光面纸，并确认要打印的一面朝上。

 **注意：** 请确认您装入的纸张尺寸不小于您在DPOF选择中指定的尺寸。

2. 插入存储卡。打印机自动进入照片模式。

 **注意：** 请不要同时插入多种存储卡或USB闪存驱动器。




3. 反复按左右箭头按钮   选择“打印DPOF”。

4. 按“开始”按钮 。

将存储卡或USB闪存驱动器中的照片保存到您的计算机上

1. 插入存储卡或USB闪存驱动器。

打印机自动显示“照片菜单”。

2. 反复按左右箭头按钮   选择“保存到计算机”，然后按“选择”按钮 。

3. 按“开始”按钮 。

存储卡管理器将会在您的计算机上打开。

4. 按照存储卡管理器对话框中的指导将照片传送到您的计算机上。

打印之前改变照片


改变“照片色彩”设置

1. 插入存储卡或USB闪存驱动器。







打印机自动显示“照片菜单”。

2. 反复按左右箭头按钮   选择“照片色彩”，然后按“选择”按钮 。







3. 反复按左右箭头按钮   浏览照片色彩设置。

4. 按“选择”按钮  选择您希望的照片色彩设置。

改变“照片选项”设置

1. 插入存储卡或USB闪存驱动器。
打印机自动显示“照片菜单”。
2. 反复按左右箭头按钮   选择“照片选项”，然后按“选择”按钮 .
3. 反复按左右箭头按钮   浏览照片选项设置。
4. 按“选择”按钮  选择您希望的照片选项设置。





改变照片尺寸

1. 插入存储卡或USB闪存驱动器。
打印机自动显示“照片菜单”。
2. 反复按左右箭头按钮   选择“照片尺寸”，然后按“选择”按钮 .
3. 反复按左右箭头按钮   浏览照片尺寸设置。
4. 按“选择”按钮  选择您希望的照片尺寸。

从存储卡或USB闪存驱动器中打印Microsoft Office文件


1. 打开您的打印机和计算机的电源，并确认它们已正确连接。
2. 请确认您的计算机上安装了支持您希望打印的Microsoft Office文件的Microsoft Office应用程序。
3. 插入包含您希望打印的Microsoft Office文件的存储卡或USB闪存驱动器。


打印机自动进入办公文件模式。


 **注意：** 如果存储卡或USB闪存驱动器中包含照片，打印机将会进入照片模式，而不是办公文件模式。请按“返回”按钮  退出照片模式，然后反复按左右箭头按钮   选择“办公文件”。


4. 在“办公文件”菜单中，按“选择”按钮进入“选择文件”子菜单。


5. 反复按左右箭头按钮   浏览存储卡或USB闪存驱动器中的文件夹和Microsoft Office文件。

 **注意：** 打印机显示屏上只能显示文件名或文件夹名称的前8个字符。

 **注意：** 文件名后面带有一个点(.)，然后是文件扩展名。文件夹名称前面带有一个反斜线符号(\)。

 **注意：** 如果多个文件名或文件夹名称的前8个字符相同，这些文件名或文件夹名称后面将会带有一个波浪符号(~)和一个数字。不同的文件名或文件夹名称分别使用不同的数字作为区别。

6. 按“选择”按钮  选择您希望打印的文件或者进入文件所在的文件夹。

7. 按“开始”按钮 .

从蓝牙设备中进行打印

设置您的打印机和蓝牙设备之间的连接

当您第一次从蓝牙设备发送打印作业时，您需要设置蓝牙设备和您的打印机之间的连接。如果出现以下情况，您需要重新设置：

- 您将打印机恢复为出厂默认设置。请参阅[恢复出厂默认设置](#)获取更多的信息。
- 您改变了蓝牙安全等级或蓝牙密码。请参阅[设置蓝牙安全等级](#)获取更多的信息。
- 您使用的蓝牙设备需要用户每次打印作业都设置蓝牙连接。请参阅随同蓝牙设备一起提供的指导获取有关蓝牙打印的信息。
- 您清除了蓝牙设备列表的内容。请参阅[蓝牙模式](#)获取更多的信息。
- 您使用的蓝牙设备名称被自动从蓝牙设备列表中删除了。

当蓝牙安全等级设置为“高”时，打印机将会保存一个已经设置了与打印机的连接的蓝牙设备列表（最多8个设备）。如果列表中已经有8个设备，当您需要为另一个蓝牙设备设置连接时，列表中的第一个设备将会被自动删除，以便保存新的设备。您需要重新设置删除的设备，然后才可以向打印机发送打印作业。

 **注意：** 您需要为每一个要向打印机发送打印作业的蓝牙设备设置连接。

如要设置打印机和蓝牙设备之间的连接：

1. 打开打印机的电源。
2. 将USB蓝牙适配器插入打印机前面的USB插口中。



注意： 打印机包装箱内不包含适配器。

3. 反复按左右箭头按钮 **< >** 选择“蓝牙”，然后按“选择”按钮 **✔**。
4. 反复按左右箭头按钮 **< >** 选择“发现”，然后按“选择”按钮 **✔**。
5. 反复按左右箭头按钮 **< >** 选择“开”，然后按“选择”按钮 **✔**。

打印机已经准备就绪，可以接收来自蓝牙设备的连接。

6. 配置蓝牙设备，设置与打印机的连接。请参阅随同蓝牙设备一起提供的指导获取有关蓝牙连接的信息。













注意： 如果打印机上的安全等级设置为“高”，您需要输入一个密码。请参阅[设置蓝牙安全等级](#)获取更多的信息。

设置蓝牙安全等级



1. 打开打印机的电源。
2. 将USB蓝牙适配器插入打印机的USB插口中。



注意： 打印机包装箱内不包含适配器。

3. 反复按左右箭头按钮   选择“蓝牙”，然后按“选择”按钮 .
4. 反复按左右箭头按钮   选择“安全等级”，然后按“选择”按钮 .
5. 反复按左右箭头按钮   选择您希望的安全等级，然后按“选择”按钮 
 - 选择“低”可以允许蓝牙设备连接到您的打印机并发送打印作业，不需要用户输入密码。
 - 选择“高”需要用户在蓝牙设备上输入一个4位数字的密码，然后才可以连接到打印机并发送打印作业。
6. 如果您设置的安全等级为“高”，“输入密码”菜单将会出现在操作面板显示屏上。反复按左右箭头按钮   选择密码的第一位数字，然后按“选择”按钮 .


当您选择了最后一位数字之后，密码将被保存。

注意： 如要改变密码，请同时按“返回”按钮  和“选择”按钮 .


从蓝牙设备中打印

1. 打开打印机的电源。
2. 将USB蓝牙适配器插入打印机的USB插口中。



 **注意：** 打印机包装箱内不包含适配器。

3. 请确认蓝牙模式已启用。请参阅[蓝牙模式](#)获取更多的信息。
4. 请确认打印机已完成设置，可以接收蓝牙连接。请参阅[设置您的打印机和蓝牙设备之间的连接](#)获取更多的信息。
5. 设置蓝牙设备打印到打印机。请参阅随同蓝牙设备一起提供的指导获取有关蓝牙打印设置的信息。
6. 请参阅随同蓝牙设备一起提供的指导开始打印。

 **注意：** 如果您将蓝牙安全等级设置为“高”，您需要在蓝牙设备上输入4位数字的密码。请参阅[设置蓝牙安全等级](#)获取更多的信息。


复印







- [复印文档](#)
 - [复印照片](#)
 - [改变复印设置](#)
-

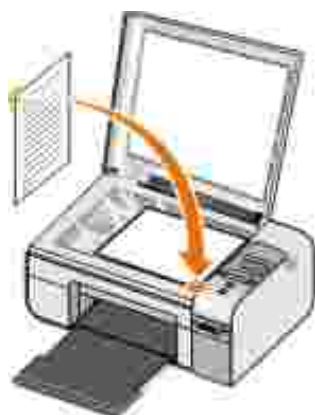

复印文档

使用操作面板

1. 打开打印机的电源。
2. 装入纸张。请参阅[在纸张支架内装入纸张](#)获取更多的信息。
3. 装入您的文档原件。




4. 反复按左右箭头按钮   选择“复印”模式，然后按“选择”按钮 .
5. 反复按左右箭头按钮   浏览复印菜单项并改变复印设置。请参阅[复印模式](#)获取更多的信息。
6. 按“开始”按钮 .

 **注意：** 如果您按“开始”按钮  之前没有在复印菜单中改变复印设置，打印机将会按照当前的默认设置进行复印。

使用您的计算机

1. 打开您的计算机和打印机的电源，并确认它们已正确连接。
2. 装入纸张。请参阅[在纸张支架内装入纸张](#)获取更多的信息。
3. 装入您的文档原件。

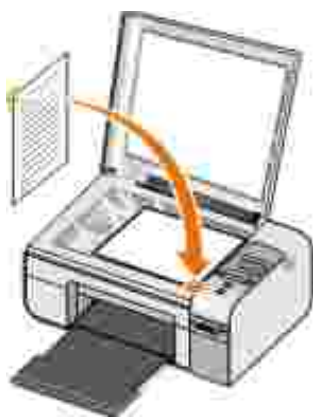


4. 单击开始 → 程序或所有程序 → Dell 打印机 → Dell Photo All in One Printer 926。
5. 单击“Dell 多功能一体中心”。
- Dell 多功能一体中心将会出现。**
6. 在“复印...”区域中，选择复印的数量（1-99）和颜色设置。
7. 如要进一步定制您的复印作业，请单击“查看更多的复印设置”。
8. 当您完成了复印设置的定制后，请单击“开始复印”。

复印照片

使用操作面板

1. 打开打印机的电源。
2. 装入纸张。
3. 装入您的文档原件。



4. 从“复印质量”菜单项中选择“照片”。
5. 按“开始”按钮 .

使用您的计算机

1. 打开您的计算机和打印机的电源，并确认它们已正确连接。
2. 装入照片 / 光面纸，并确认要打印的一面朝上。
3. 装入您的照片原件。



4. 单击开始→ 程序或所有程序→ Dell 打印机→ Dell Photo All in One Printer 926。
 5. 单击“Dell 多功能一体中心”。
Dell 多功能一体中心将会出现。
 6. 单击“开始预览”。
 7. 调整预览图像中的虚线框，使之包含您要复印的区域。
 8. 在“复印...”区域中，选择复印的数量（1-99）和颜色设置。
 9. 如要进一步定制您的复印作业，请单击“查看更多的复印设置”。
 10. 当您完成了复印设置的定制后，请单击“开始复印”。
-

改变复印设置

1. 单击开始→ 程序或所有程序→ Dell 打印机→ Dell Photo All in One Printer 926。
2. 单击“Dell 多功能一体中心”。
Dell 多功能一体中心将会出现。
3. 在“复印”区域中，选择复印的数量（1-99）和颜色设置。

4. 单击“查看更多的复印设置”，然后：

- 选择复印的质量。
- 选择空白纸张尺寸。
- 选择文档原件的尺寸。
- 使您的复印结果较浅或较深。
- 缩小或放大您的文档。

5. 单击“高级”按钮。

6. 单击各个选项卡并根据您的需要改变高级选项，例如纸张尺寸或打印质量等。

单击此选项卡：	您可以：
打印	<ul style="list-style-type: none">● 选择纸张尺寸和纸张类型。● 选择无边界打印选项。● 选择打印质量。
扫描	<ul style="list-style-type: none">● 选择颜色设置和扫描分辨率。● 选择自动剪裁扫描的图像。
图像增强	<ul style="list-style-type: none">● 扫描后处理图像消除弯曲现象（平整）。● 选择将模糊的图像变得清晰。● 调节复印图像的亮度。● 调节复印图像的颜色修正曲线(gamma)。
图案	<ul style="list-style-type: none">● 将黑白方式扫描的照片转变成点阵模式(di t her)。● 从杂志 / 报纸中去除图案（过滤）。● 降低彩色文档的背景噪音。

7. 单击“确定”。

8. 当您完成了复印设置的定制后，请单击“开始复印”。

扫描

- [扫描单页文档或照片](#)
 - [扫描多张照片或多页文档](#)
 - [通过网络扫描文档或照片](#)
 - [使用光学字符识别\(OCR\)软件编辑扫描的文档中的文本](#)
 - [编辑扫描的图像](#)
 - [将图像保存到您的计算机上](#)
 - [通过电子邮件发送扫描的图像或文档](#)
-


扫描单页文档或照片

1. 打开您的计算机和打印机的电源，并确认它们已正确连接。
2. 装入您的文档原件或照片。



3. 单击开始→ 程序或所有程序→ **Del I 打印机**→ **Del I Photo All Printer 926**。
 4. 单击“**Del I 多功能一体中心**”。
- Del I 多功能一体中心**将会出现。


5. 从“将扫描的图像发送到”下拉列表中选择您希望使用的应用程序。

 **注意：** 如果下拉列表中没有您希望使用的应用程序，请选择“查找更多...”。在出现的界面中单击“添加”，然后找到您的应用程序并添加到列表中。

6. 如要进一步定制您的扫描作业，请单击“查看更多的扫描设置”。

7. 当您完成了扫描设置的定制后，请单击“开始扫描”。

扫描多张照片或多页文档

 **注意：** 一些应用程序不支持多页扫描。


1. 打开您的计算机和打印机的电源，并确认它们已正确连接。
2. 装入您的文档原件。请参阅[将文档原件放置在扫描仪玻璃上](#)获取更多的信息。




3. 单击开始 → 程序或所有程序 → Dell 打印机 → Dell Photo All-in-One Printer 926。

4. 单击“Dell 多功能一体中心”。

Dell 多功能一体中心将会出现。

 **注意：** 您也可以使用打印机的操作面板打开Dell 多功能一体中心。请参阅[使用Dell 多功能一体中心](#)获取更多的信息。

5. 从“将扫描的图像发送到”下拉列表中选择您希望使用的应用程序。

 **注意：** 如果下拉列表中没有您希望使用的应用程序，请选择“查找更多...”。在出现的界面中单击“添加”，然后找到您的应用程序并添加到列表中。

6. 如要进一步定制您的扫描作业，请单击“查看更多的扫描设置”。

7. 单击“高级”按钮。

“高级扫描设置”对话框将会出现。

8. 在“扫描”选项卡中选中“输出前扫描多个图像”。

9. 单击“确定”。

10. 当您完成了扫描设置的定制后，请单击“开始扫描”。

当第一页照片或文档扫描完以后，计算机屏幕上将会提示您扫描下一页。


11. 将下一页照片或文档放置在扫描仪玻璃上，然后单击“是”。重复此过程，直到所有的页面都扫描完毕。

12. 单击“否”。

您选择的应用程序将会打开，并且显示扫描的结果。

通过网络扫描文档或照片




1. 请确认打印机连接在网络适配器上，或者连接在网络中的计算机上。

 **注意：** Dell 打印机只能通过 Dell 无线网络适配器（另外单独销售）连接在网络中。


2. 打开您的计算机和打印机的电源，并确认它们已正确连接。


3. 装入您的文档原件或照片。





4. 反复按左右箭头按钮 < > 选择“扫描”，然后按“选择”按钮 .
5. 反复按左右箭头按钮 < > 选择“扫描至”，然后按“选择”按钮 .
6. 反复按左右箭头按钮 < > 选择您希望将扫描的文档或照片发送至哪一台计算机，然后按“选择”按钮 .

打印机将会扫描计算机，生成可以打开扫描结果的应用程序列表。

 **注意：** 计算机上必须已经安装了打印机软件。请使用 *Drivers and Utilities* 光盘安装打印机软件。


 **注意：** 如果只有一台计算机可以从打印机接收扫描结果，打印机将会自动显示这台计算机上可以打开扫描结果的应用程序。

7. 反复按左右箭头按钮 < > 选择您希望打开文档或照片的应用程序，然后按“选择”按钮 .
8. 按“开始”按钮 .

扫描的文档或照片将会被发送到所选的计算机上，并且在所选的应用程序中打开。

使用光学字符识别(OOCR) 软件编辑扫描的文档中的文本

光学字符识别(OOCR) 软件可以将扫描的图像转换成可以在文字处理应用程序中编辑的文本。

 **注意：** 使用日语或简体中文的用户：请确认您在您的计算机上安装了光学字符识别(OOCR) 软件。随同您的打印机一起提供了此软件。此软件应该和您的打印机驱动程序同时安装。


1. 打开您的计算机和打印机的电源，并确认它们已正确连接。
2. 装入您的文档原件。




3. 单击开始→ 程序或所有程序→ Dell 打印机→ Dell Photo All in One Printer 926。

4. 单击“Dell 多功能一体中心”。

Dell 多功能一体中心将会出现。

 **注意：** 您也可以使用打印机的操作面板打开Dell 多功能一体中心。请参阅[使用Dell 多功能一体中心](#)获取更多的信息。

5. 从“将扫描的图像发送到”下拉列表中选择您希望使用的文字处理或文本编辑应用程序。

 **注意：** 如果下拉列表中没有您希望使用的应用程序，请选择“查找更多”。在出现的界面中单击“添加”，然后找到您的应用程序并添加到列表中。

6. 如要进一步定制您的扫描作业，请单击“查看更多的扫描设置”。

7. 单击“高级”按钮。

“高级扫描设置”对话框将会出现。

8. 在“扫描”选项卡中，请确认选中了“将扫描的图像转换成文本(OCR)”。

9. 单击“确定”。

10. 当您完成了扫描设置的定制后，请单击“开始扫描”。

您选择的应用程序将会打开，并且显示扫描的文本。


编辑扫描的图像

1. 打开您的计算机和打印机的电源，并确认它们已正确连接。
2. 装入您的文档原件。




3. 单击开始→ 程序或所有程序→ Dell 打印机→ Dell Photo All in One Printer 926。
4. 单击“Dell 多功能一体中心”。

Dell 多功能一体中心将会出现。

 **注意：** 您也可以使用打印机的操作面板打开Dell 多功能一体中心。请参阅[使用Dell 多功能一体中心](#)获取更多的信息。

5. 从“将扫描的图像发送到”下拉列表中选择您希望使用的应用程序。

 **注意：** 如果下拉列表中没有您希望使用的应用程序，请选择“查找更多...”。在出现的界面中单击“添加”，然后找到您的应用程序并添加到列表中。

6. 如要进一步定制您的扫描作业，请单击“查看更多的扫描设置”。
7. 当您完成了扫描设置的定制后，请单击“开始扫描”。

扫描完毕后，您选择的程序将会打开，并且显示扫描的结果。

8. 使用应用程序中的工具编辑图像。您可以：

- 去除红眼
- 剪裁您的图像

- 在图像中添加文字
- 调节图像的亮度和对比度

请参阅随同您的图像应用程序一起的帮助文档获取更多的信息。

将图像保存到您的计算机上

1. 打开您的计算机和打印机的电源，并确认它们已正确连接。
2. 装入您的文档原件。



3. 单击开始→ 程序或所有程序→ Dell 打印机→ Dell Photo All-in-One Printer 926。
 4. 单击“Dell 多功能一体中心”。
- Dell 多功能一体中心将会出现。
5. 在“创造性工具”区域中，单击“将图像保存到我的计算机上”。
 6. 按照计算机屏幕上的指导将图像保存到您的计算机上。
-


通过电子邮件发送扫描的图像或文档

1. 打开您的计算机和打印机的电源，并确认它们已正确连接。
2. 装入您的文档原件。




3. 单击开始→ 程序或所有程序→ Dell 打印机→ Dell Photo All in One Printer 926。
4. 单击“Dell 多功能一体中心”。

Dell 多功能一体中心将会出现。

 **注意：** 您也可以使用打印机的操作面板打开Dell 多功能一体中心。请参阅[使用Dell 多功能一体中心](#)获取更多的信息。

5. 在“创造性工具”区域中，单击“通过电子邮件发送图像或文档”。
6. 从“准备扫描的是什么？”下面的列表中选择适当的选项。
7. 按照计算机屏幕上的提示准备要发送的图像。
8. 单击“下一步”。
9. 打开您的电子邮件应用程序，为所附加的图像写一条注释，然后开始发送。

 **注意：** 如果您不了解如何将文档附加到电子邮件，请参阅您的电子邮件应用程序的帮助文件。


传真







- [发送传真](#)
 - [接收传真](#)
 - [监控传真活动](#)
 - [阻止垃圾传真](#)
-

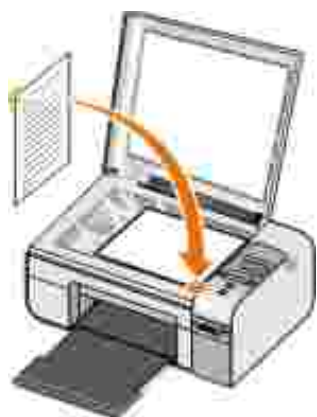发送传真

发送纸张传真

1. 打开您的打印机和计算机的电源，并确认它们已正确连接。请确认将一根可用的模拟电话线连接在您的计算机调制解调器上。如果您在同一根电话线上安装了DSL（数字用户线路）宽带服务，您必须同时安装一个DSL过滤器。请与您的Internet服务供应商联系获取更多的信息。
2. 装入您的文档原件。



3. 反复按左右箭头按钮   选择“传真”，然后按“选择”按钮 .
4. 反复按左右箭头按钮   选择“开始传真”，然后按“开始”按钮 .

DeI 传真解决方案软件将会打开。


5. 单击“发送新的传真”。
6. 输入收件人的联系信息，或者您可以从您的电话簿中选择一个现有的收件人。
7. 单击“下一步”。
8. 选择封面，然后单击“下一步”。
9. 单击“下一步”。
10. 单击“发送”。

传真电子文档

1. 打开您的文档，从应用程序中单击“文件→打印”。
“打印”对话框将会出现。
2. 从打印机列表中选择“**Del I 传真**”。
3. 单击“确定”，然后按照计算机屏幕上的指导进行操作。

创建传真封面

1. 打开Del I 传真解决方案，单击“发送设置”。
2. 单击“发送传真”选项卡。
3. 在“封面”区域中单击“使用者信息”。
4. 输入发件人的信息。


 **注意：** 当您第一次使用 Dell 传真解决方案时，您可能已经输入了此信息。



5. 单击“确定”。
6. 在“封面”区域中单击“配置封面”。
7. 单击“下一个”或“预览”为您的封面选择模板。
8. 如有必要，请添加一个公司徽标。
 - a. 单击“更改”。
 - b. 单击“浏览”。
 - c. 浏览并选择一个图像作为您的公司徽标，然后单击“打开”。
 - d. 如有必要，请调整您的徽标。
 - e. 单击“确定”。
9. 单击“确定”。

当发送传真时，请确认您选择了“使用封面模板”，以便使用您刚才创建的封面。请参阅[发送传真](#)获取更多的信息。

在预定的时间发送传真

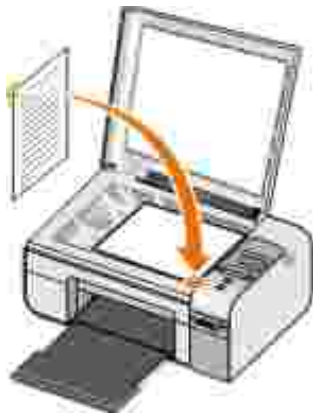1. 打开您的打印机和计算机的电源，并确认它们已正确连接。请确认将一根可用的模拟电话线连接在您的计算机调制解调器上。如果您在同一根电话线上安装了DSL（数字用户线路）宽带服务，您必须同时安装一个DSL过滤器。
2. 装入您的文档原件。



3. 反复按左右箭头按钮 < > 选择“传真”，然后按“选择”按钮 .
 4. 反复按左右箭头按钮 < > 选择“开始传真”，然后按“开始”按钮 .
- Del I 传真解决方案软件将会打开。
5. 单击“发送新的传真”。
 6. 输入收件人的联系信息，或者您可以从您的电话簿中选择一个现有的收件人。
 7. 单击“下一步”。
 8. 选择封面，然后单击“下一步”。
 9. 单击“下一步”。
 10. 选择“延时到：”，然后设置您希望发送传真的日期和时间。
 11. 单击“发送”。




发送包含附件的传真




您可以在一份传真中发送多个文件或扫描的文档。

1. 打开您的打印机和计算机的电源，并确认它们已正确连接。请确认将一根可用的模拟电话线连接在您的计算机调制解调器上。如果您在同一根电话线上安装了DSL（数字用户线路）宽带服务，您必须同时安装一个DSL过滤器。

2. 装入您的文档原件。



3. 反复按左右箭头按钮   选择“传真”，然后按“选择”按钮 .

4. 反复按左右箭头按钮   选择“开始传真”，然后按“开始”按钮 .

Del I 传真解决方案软件将会打开。

5. 单击“发送新的传真”。
6. 输入收件人的联系信息，或者您可以从您的电话簿中选择一个现有的收件人。
7. 单击“下一步”。
8. 选择封面，然后单击“下一步”。
9. 单击“添加文档文件...”附加其他的文件，或者单击“添加扫描文档...”扫描文档并附加到传真中。
10. 单击“下一步”。
11. 单击“发送”。

转发接收的传真

1. 打开您的打印机和计算机的电源，并确认它们已正确连接。请确认将一根可用的模拟电话线连接在您的计算机调制解调器上。如果您在同一根电话线上安装了DSL（数字用户线路）宽带服务，您必须同时安装一个DSL过滤器。
 2. 单击开始→ 程序或所有程序→ 传真解决方案→ 传真解决方案。
Del I 传真解决方案软件将会打开。
 3. 在“最近接收的传真”区域中选择您希望转发的文档。
 4. 从“传真”菜单中单击“转发传真”。
 5. 输入您的收件人的联系信息，然后单击“下一步”。
 6. 选择封面，然后单击“下一步”。
 7. 您可以在传真中附加其他文件或扫描的文档。
 8. 单击“下一步”。
 9. 根据您的需要改变发送选项。
 10. 单击“发送”。
-

接收传真

自动接收传真

1. 单击开始→ 程序或所有程序→ 传真解决方案→ 传真解决方案。
2. 在“接收传真”区域中选择“自动”。

手动接收传真

1. 单击开始→ 程序或所有程序→ 传真解决方案→ 传真解决方案。

Del I 传真解决方案软件将会打开。

2. 在“接收传真”区域中选择“手动”。

打印接收的传真

1. 单击开始→ 程序或所有程序→ 传真解决方案→ 传真解决方案。

Del I 传真解决方案软件将会打开。

2. 在“最近接收的传真”区域中选择您希望打印的文档。

3. 从“传真”菜单中单击“打印传真”。

“打印”对话框将会出现。

4. 从打印机列表中选择您希望使用的打印机名称。

5. 单击“确定”打印所选的传真。

删除接收的传真

1. 单击开始→ 程序或所有程序→ 传真解决方案→ 传真解决方案。

Del I 传真解决方案软件将会打开。

2. 在“最近接收的传真”区域中选择您希望删除的文档。

3. 从“传真”菜单中单击“删除传真”。

4. 单击“是”删除所选的传真。

监控传真活动

查看传真状态

1. 单击开始→ 程序或所有程序→ 传真解决方案→ 传真解决方案。
2. 您可以在“发送传真”或“接收传真”区域中查看您的传真的状态。

创建传真报告

1. 单击开始→ 程序或所有程序→ 传真解决方案→ 传真解决方案。
2. 在“发送传真”或“接收传真”区域中单击“创建报告”。

阻止垃圾传真

1. 打开Dell传真解决方案，单击“接收设置”。
2. 单击“接收传真”选项卡。
3. 选中“启用传真阻止功能”。

向“阻止列表”中添加记录：

1. 在“阻止垃圾传真”区域中单击“管理阻止列表”。
2. 单击“新建”。

3. 指定您希望组织的传真标识符。

4. 单击“确定”。

编辑“阻止列表”中的记录：

1. 在“阻止垃圾传真”区域中单击“管理阻止列表”。

2. 从列表中选择您希望编辑的记录。

3. 单击“编辑”。

4. 改变记录信息。

5. 单击“确定”。

删除“阻止列表”中的记录：

1. 在“阻止垃圾传真”区域中单击“管理阻止列表”。

2. 从列表中选择您希望删除的记录。

3. 单击“删除”。

4. 单击“是”。


了解打印机软件

- [使用Del I 多功能一体中心](#)
- [使用打印首选项](#)
- [使用存储卡管理器](#)
- [使用Del I 传真解决方案软件](#)
- [Del I 墨水管理系统](#)
- [反安装并重新安装软件](#)

打印机软件主要包括以下部分：

- **Del I 多功能一体中心** - 您可以使用最新扫描的图像或以前保存的文档和图像完成各种扫描、复印、传真和打印操作。
- **打印首选项** - 您可以调整打印设置。
- **Del I 墨水管理系统™** - 当您的打印机的墨水量偏低时，可以对您提出警告。
- **存储卡管理器** - 您可以显示、管理、编辑、打印照片，以及将照片保存到您的计算机上。

使用Del I 多功能一体中心

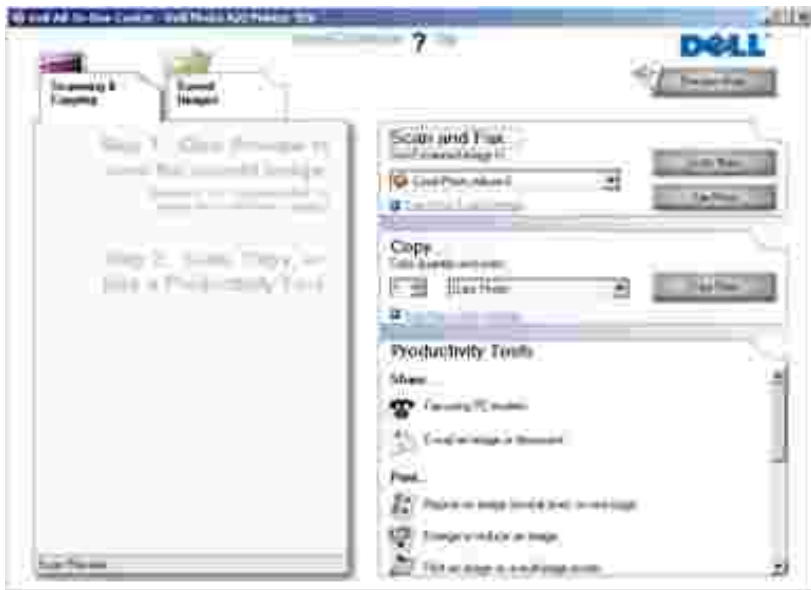











您可以使用 **Dell i** 多功能一体中心实现以下的功能：

- 扫描、复印、传真、以及使用创造性工具。
- 选择您希望将扫描的图像发送到哪个应用程序。
- 选择复印的数量和颜色设置。
- 获取问题解答和维护信息。
- 预览您希望打印或复印的图像。
- 管理照片（复制到文件夹、打印、以及完成创造性项目）。

如要使用您的计算机打开 **Dell i** 多功能一体中心：

1. 单击开始 → 程序或所有程序 → **Dell i** 打印机 → **Dell i Photo All in One 926**。
2. 单击“**Dell i** 多功能一体中心”。

如要使用打印机操作面板打开 **Dell i** 多功能一体中心：


1. 反复按左右箭头按钮   选择“扫描”模式，然后按“选择”按钮 。
2. 反复按左右箭头按钮   选择“扫描至”，然后按“选择”按钮 。
3. 反复按左右箭头按钮   选择“预览”，然后按“选择”按钮 。
4. 按“开始”按钮 。

Del I 多功能一体中心主要包括四个部分：

在此区域中：	您可以：
预览区域	<ul style="list-style-type: none"> ● 在预览图像中选择要扫描或复印的区域。 ● 预览您希望打印或复印的图像。
扫描和传真	<ul style="list-style-type: none"> ● 选择将扫描的图像发送到哪个应用程序。 ● 选择您要扫描的图像类型。 ● 选择扫描的质量。 ● 选择“开始扫描”。 ● 选择“开始传真”。 <p>注意： 单击“查看更多的扫描设置”可以显示出所有的设置。</p>
复印	<ul style="list-style-type: none"> ● 选择复印的数量和颜色。 ● 选择复印的质量。 ● 指定空白纸张尺寸。 ● 指定要复印的文档原件的尺寸。 ● 使您的复印结果较浅或较深（您也可以使用操作面板实现此功能）。 ● 放大或缩小您的复印结果。 <p>注意： 单击“查看更多的复印设置”可以显示出所有的设置。</p>
创造性工具	<ul style="list-style-type: none"> ● 使用计算机调制解调器发送传真。 ● 通过电子邮件发送图像或文档。 ● 将一个图像在一页纸上复制多个。 ● 放大或缩小图像。 ● 将一个图像打印成多页的海报。 ● 将图像保存到您的计算机上。 ● 保存多张照片。 ● 编辑扫描的文档中的文本(OOCR)。 ● 使用照片编辑器编辑图像。

如要获取更多的信息，请单击Del I 多功能一体中心里的“帮助”。

使用打印首选项

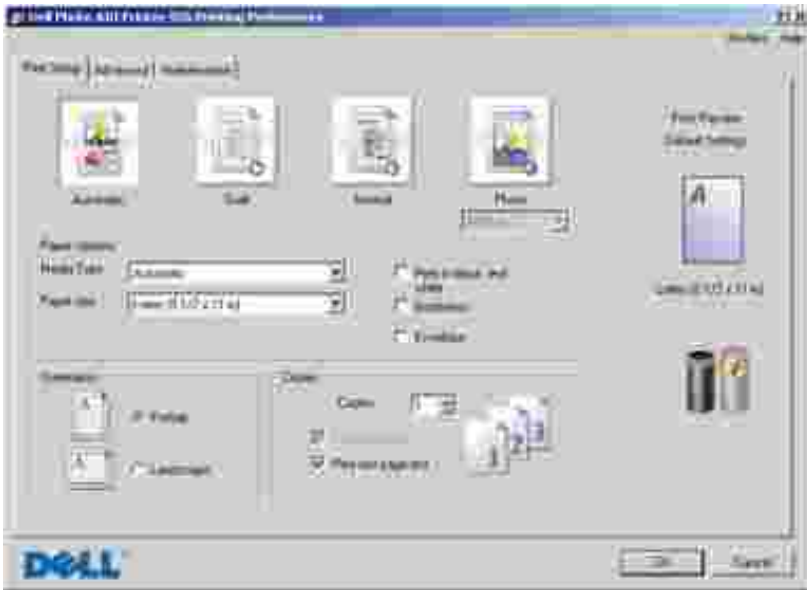

您可以根据所创建项目的类型，在打印首选项中改变相关的打印设置。

如要在打开文档的情况下打开打印首选项：

1. 从应用程序中单击“文件→打印”。


“打印”对话框将会出现。

2. 单击“首选项”、“属性”、“选项”或“设置”（取决于您的应用程序或者操作系统）。

打印首选项界面将会出现。

如要在不打开文档的情况下打开打印首选项：

1. *Windows XP*: 单击开始→设置→控制面板→打印机和其他硬件→打印机和传真。
Windows 2000: 单击开始→设置→打印机。
2. 右键单击您的打印机图标，然后单击“打印首选项”。


 **注意：** 从“打印机”文件夹中改变的打印设置将成为大多数应用程序的默认设置。

打印首选项的选项卡

选项卡：	设置：
打印设置	<p>质量/速度 - 选择自动、高速、正常或照片，取决于您希望获得什么样的输出质量。高速是打印速度最快的选项，但是如果您安装了照片打印墨盒，则不应该选择此选项。</p> <p>介质类型 - 允许您手动选择纸张类型，或者让打印机传感器自动检测纸张类型。</p> <p>纸张尺寸 - 选择您使用的纸张尺寸。</p>

选项卡 :	设置 :
	使用黑白方式打印彩色图像 - 使用黑白方式打印您的彩色图像, 以节省彩色打印墨盒的墨水。 注意 : 如果您已经选择了“使用彩色打印墨盒完成所有的黑白打印作业”, 则不能使用此设置。
	无边界 - 如果您希望打印无边界照片, 请选中此框。
	打印方向 - 选择您的文档在打印页上的排布方式。您可以选择纵向打印或横向打印。
	信封 - 当您希望打印信封时, 请选择此选项。在“纸张尺寸”区域中列出了所有可以打印的信封尺寸。
	多份打印 - 定制打印机如何打印多份文档: 逐份打印、正常或先打印最后一页。
高级	双面打印 - 选择此设置可以在纸张的双面打印您的文档。
	样式 - 选择正常、横幅、镜像、合并打印、海报、手册或无边界。
	自动图像锐化 - 根据图像的内容自动选择最佳的图像锐化设置。
	DeI 客户经验增进计划及参加 - 您可以获取有关DeI 客户经验增进计划的信息并改变您的状态。
	更多的选项 - 允许您选择“外观模式”和“完成打印”设置。您也可以查看打印机检测到的纸张类型。
维护	安装打印墨盒
	清洗打印墨盒
	校正打印墨盒
	打印测试页
	网络支持

使用存储卡管理器

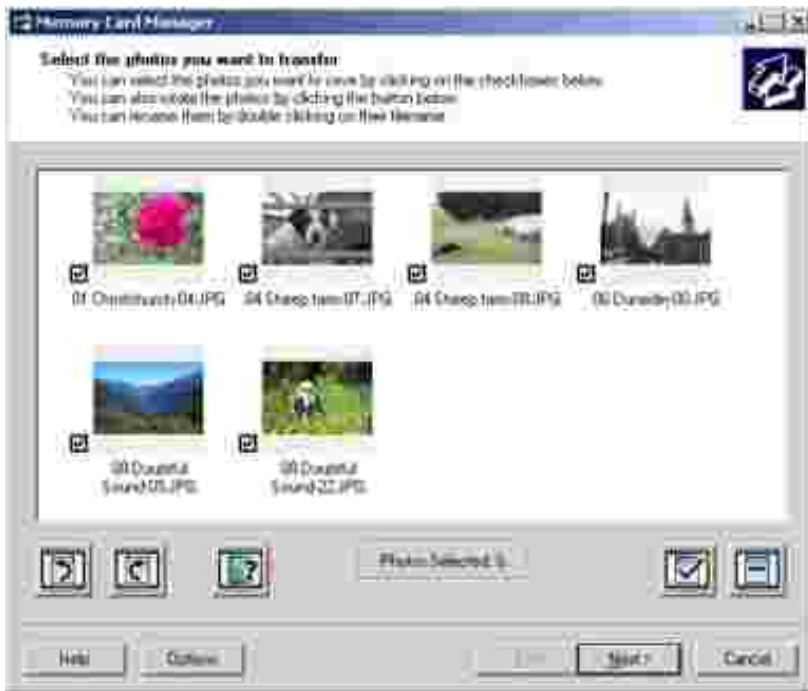

存储卡管理器可以帮助您显示、管理、编辑、打印存储卡或USB闪存驱动器中的照片，以及将存储卡或USB闪存驱动器中的照片保存到您的计算机上。

如要打开存储卡管理器：

1. 将存储卡插入打印机前面相应的插槽中，或者将USB闪存驱动器插入打印机前面的Pict Bridge插口中。
2. 单击开始→ 程序或所有程序→ **DeI I 打印机**→ **DeI I Phot o Al O Pri nter 926**。
3. 单击“存储卡管理器”。

如要指定存储卡管理器监视哪一个存储卡或USB闪存驱动器：


1. 将存储卡插入打印机前面相应的插槽中，或者将USB闪存驱动器插入打印机前面的Pict Bridge插口中。
2. 单击开始→ 程序或所有程序→ **DeI I 打印机**→ **DeI I Phot o Al O Pri nter 926**。
3. 单击“存储卡管理器”。
4. 单击“选项”，然后单击“其他设备”选项卡。

5. 选中您希望监视的存储卡或USB闪存驱动器，然后单击“确定”。

当包含照片的所选存储卡插入插槽中，或者包含照片的所选USB闪存驱动器插入Pict Bridge插口中时，存储卡管理器将会打开。

注意： 请不要在指示灯闪烁时取出存储卡或USB闪存驱动器，或者触摸打印机上存储卡或USB闪存驱动器附近的区域。

使用Del I 传真解决方案软件

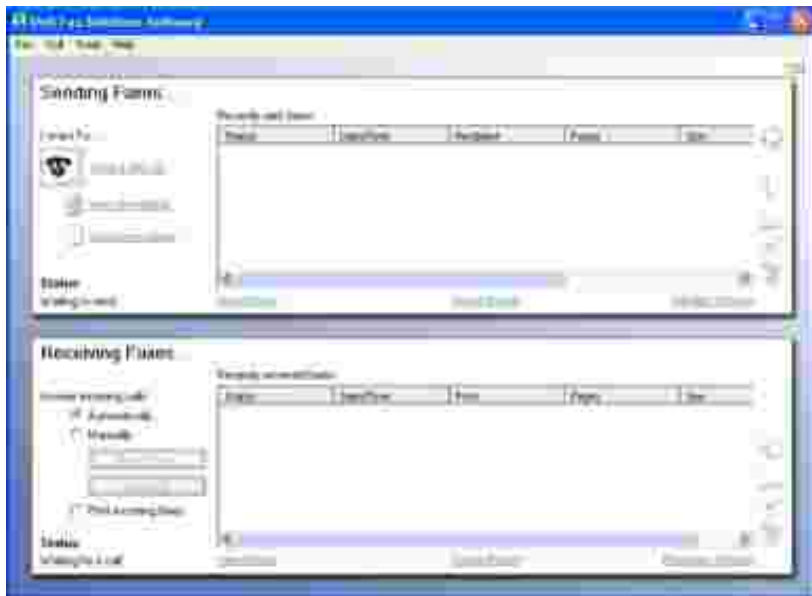

Del I 传真解决方案软件可以帮助您：

- 发送和接收传真。
- 管理您的电话簿。
- 创建封面。
- 查看传真历史记录。
- 创建传真报告。
- 调整其他的传真设置。

如要打开Del I 传真解决方案：

1. 单击开始→ 程序或所有程序→ 传真解决方案。
2. 单击“传真解决方案”。

Del I 传真解决方案主要包括两个部分。当您保存设置后，这些设置将应用于您发送或接收的每一份传真。

在此区域中：	您可以：
发送传真	<ul style="list-style-type: none">● 发送新的传真。● 管理您的电话簿。● 为您的封面设置模板。● 指定封面信息。● 查看已发送和准备发送的传真列表。● 为已发送和准备发送的传真创建报告。● 选择您是否希望使用传真页眉。● 指定发送传真失败后打印机重新尝试发送的次数。● 指定您希望用于扫描文档的驱动程序。
接收传真	<ul style="list-style-type: none">● 指定您希望如何应答来电。● 选择是否打印接收到的传真。● 查看已接收和准备接收的传真列表。● 为已接收和准备接收的传真创建报告。● 设置应答来电之前的铃响次数。● 阻止垃圾传真。

您可以单击“发送设置”或“接收设置”查看更多的选项。单击各个选项卡，并根据您的需要改变设置。

Del I 墨水管理系统

每次您开始打印作业后，打印状态界面将会出现在计算机屏幕上，指示打印作业的进度，以及打印墨盒的剩余墨水量和大约还能再打印多少页。当安装了新的打印墨盒后，开始的50页内不会显示页数。随着对打印习惯的了解，将可以为您提供准确的信息。随着打印机完成不同类型的打印作业，剩余页数也会相应地变化。

如果您的打印墨盒的墨水量偏低，当您尝试打印时，“墨水量偏低通知”界面将会出现在计算机屏幕上。每次您尝试打印时都会显示此通知，直到您更换了新的打印墨盒。请参阅[更换打印墨盒](#)获取更多的信息。

如果您的一个或两个打印墨盒的墨水用完了，当您尝试打印时，“更换打印墨盒”界面将会出现在计算机屏幕上。如果您继续打印，打印结果可能与您预期的不同。

如果您的黑色打印墨盒的墨水用完了，您可以选择使用彩色打印墨盒打印黑色区域，请选中“完成打印”，然后单击“继续打印”。此后将一直使用彩色打印墨盒打印黑色区域，直到您更换了黑色打印墨盒，或者在打印首选项→“高级”选项卡→更多的选项中取消选择此选项。当您更换了打印墨盒后，“更换打印墨盒”界面将不会再出现，同时“完成打印”复选框自动恢复为默认设置（不选中）。



如果您的彩色打印墨盒的墨水用完了，您可以选择使用黑白方式打印彩色文档，请选中“完成打印”，然后单击“继续打印”。此后将一直使用黑白方式打印彩色文档，直到您更换了彩色打印墨盒，或者在打印首选项→“高级”选项卡→更多的选项中取消选择此选项。当您更换了打印墨盒后，“更换打印墨盒”界面将不会再出现，同时“完成打印”复选框自动恢复为默认设置（不选中）。

反安装并重新安装软件

如果您的打印机工作不正常，或者当您尝试使用打印机时出现了通讯错误信息，您可以进行反安装，然后重新安装打印机软件。

1. 单击开始→ 程序或所有程序→ Dell 打印机→ Dell Photo All in One Printer 926。
2. 单击“Dell Photo All in One Printer 926反安装程序”。
3. 按照计算机屏幕上的指导反安装打印机软件。
4. 重新启动您的计算机。
5. 插入*Drivers and Utilities*光盘，然后按照计算机屏幕上的指导安装软件。

如果软件安装界面没有出现：

- a. *Windows XP*: 单击“开始→ 我的电脑”。

Windows 2000: 在计算机桌面上双击“我的电脑”图标。


- b. 双击光盘驱动器图标，然后再双击set up.exe。

- c. 当打印机软件安装界面出现后，请单击“个人安装”或“网络安装”。

- d. 按照计算机屏幕上的指导完成安装。

维护

- [更换打印墨盒](#)
- [校正打印墨盒](#)
- [清洗打印墨盒喷头](#)
- [改变操作面板默认设置](#)
- [恢复出厂默认设置](#)

 **当心：** 在进行任何本章中的操作之前，请首先仔细阅读您的*用户指南*中的安全信息，并按照其中的要求进行操作。

Del I 打印墨盒只能从 Del I 公司获得。您可以访问网站 www.del I . com / suppl i es 在线订购打印墨盒，或者拨打电话订购打印墨盒。

Del I 建议您使用 Del I 打印墨盒进行打印。对于使用非 Del I 提供的附件、部件或组件所引起的问题，Del I 不提供保修。

更换打印墨盒

1. 打开您的打印机的电源。
2. 抬起打印机单元，将扫描仪支架固定在槽中，保持打印机单元打开。



如果打印机没有工作，打印墨盒拖车将会自动移动并停止在安装位置。

3. 向下按墨盒锁定杆，然后打开墨盒保护盖。




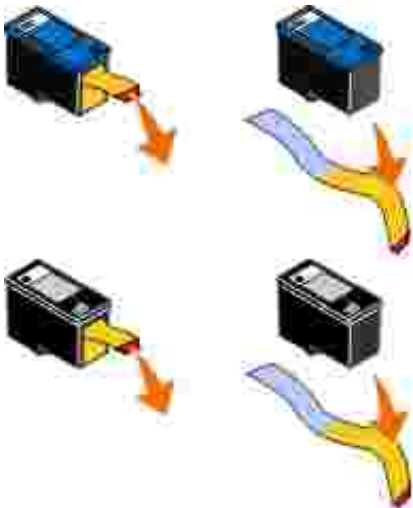
4. 取出旧的打印墨盒。



5. 将打印墨盒保存在密封的容器中，例如随同您的照片打印墨盒一起的打印墨盒存储架，或者进行妥善处理。

6. 如果您安装的是新的打印墨盒，请撕掉打印墨盒后面和底部的透明封条。


 **注意：** 下面图中所示的是一个黑色打印墨盒和一个彩色打印墨盒（用于普通打印）。如要打印照片，请使用照片打印墨盒和彩色打印墨盒。



7. 装入新的打印墨盒。请确认黑色或照片打印墨盒牢固地安装在左侧的墨盒拖车内，彩色打印墨盒牢固地安装在右侧的墨盒拖车内。



8. 关闭墨盒保护盖，直到卡紧。

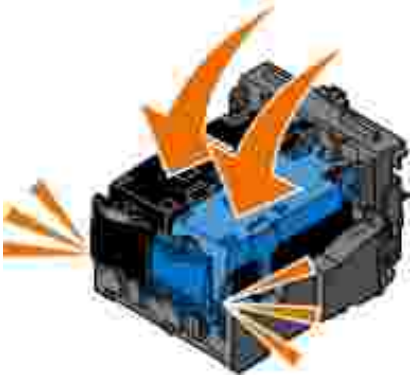







9. 抬起打印机单元，将扫描仪支架向后推，然后轻轻地放下打印机单元，直到完全关闭。



校正打印墨盒

在安装或更换打印墨盒之后，您的打印机将会自动提示您校正打印墨盒。当打印的字符不正规、左边界处的字符没有对齐、或者垂直方向的直线出现波浪状时，您可能也需要校正打印墨盒。

如要使用操作面板校正打印墨盒：

1. 装入普通纸。请参阅[在纸张支架内装入纸张](#)获取更多的信息。
2. 反复按左右箭头按钮   选择“维护”，然后按“选择”按钮 .
3. 反复按左右箭头按钮   选择“校正打印墨盒”，然后按“选择”按钮 .

打印机将会打印出一张蓝色和黑色的校正测试页，并且在打印过程中对打印墨盒进行校正。校正完毕后，您可以丢弃校正测试页。

如要使用打印机软件校正打印墨盒：

1. 装入普通纸。
 2. *Windows XP*: 单击开始→ 控制面板→ 打印机和其他硬件→ 打印机和传真。
Windows 2000: 单击开始→ 设置→ 打印机。
 3. 右键单击打印机图标。
 4. 单击“打印首选项”。
- 打印首选项界面将会出现。
5. 单击“维护”选项卡。
 6. 单击“校正打印墨盒”。
 7. 单击“打印”。







打印机将会打印出一张蓝色和黑色的校正测试页，并且在打印过程中对打印墨盒进行校正。校正完毕后，您可以丢弃校正测试页。

清洗打印墨盒喷头

当出现以下的情况时，您可能需要清洗打印墨盒喷头：

- 打印的图像或黑色区域中出现白色条纹。
- 打印结果太黑或有污迹。
- 打印的颜色较浅、不打印或打印不完全。
- 垂直方向的直线出现锯齿状或者边缘不平滑。

如要使用操作面板清洗打印墨盒喷头：

1. 装入普通纸。请参阅[在纸张支架内装入纸张](#)获取更多的信息。
2. 反复按左右箭头按钮   选择“维护”，然后按“选择”按钮 .
3. 反复按左右箭头按钮   选择“清洗打印墨盒”，然后按“选择”按钮 .

如要使用打印机软件清洗打印墨盒：

1. 装入普通纸。
2. *Windows XP*: 单击开始→ 控制面板→ 打印机和其他硬件→ 打印机和传真。
Windows 2000: 单击开始→ 设置→ 打印机。
3. 右键单击打印机图标。
4. 单击“打印首选项”。
打印首选项界面将会出现。
5. 单击“维护”选项卡。

6. 单击“清洗打印墨盒”。

打印机将会打印出一张清洗测试页。

7. 如果打印质量没有提高，请单击“再次清洗”。

8. 重新打印您的文档，看打印质量是否有所提高。

如果您仍然对打印质量不满意，请取出打印墨盒，使用一块干布擦洗打印墨盒的喷头，然后重新打印您的文档。










改变操作面板默认设置

您可以改变操作面板上以下选项的默认设置。

操作面板菜单：	菜单项：
复印菜单	复印色彩
	份数
	质量
	深浅
	纸张类型
	缩放
	修正歪斜
照片菜单	照片色彩
	照片选项
	质量
	纸张类型
Pict Bridge菜单	质量
	纸张类型
	照片选项
扫描菜单	扫描色彩
传真菜单	传真色彩
维护菜单	清除设置
蓝牙菜单	启用
	发现
	安全等级

操作面板菜单：	菜单项：
	安全密码
	设备列表










如要改变操作面板上的默认设置：

1. 打开打印机的电源。
2. 改变操作面板设置。
3. 反复按左右箭头按钮   选择“维护”，然后按“选择”按钮 .
4. 反复按左右箭头按钮   选择“设置默认值”，然后按“选择”按钮 .
5. 反复按左右箭头按钮   选择“使用当前设置”，然后按“选择”按钮 .

当前操作面板上的设置将会被保存为新的默认设置。

恢复出厂默认设置

标记有星号(*)的菜单设置是当前的设置。您可以将其恢复为初始打印机设置，通常也称作出厂默认设置。

1. 请确认打印机的电源已打开。
2. 在操作面板上，反复按左右箭头按钮   选择“维护”，然后按“选择”按钮 .
3. 反复按左右箭头按钮   选择“设置默认值”，然后按“选择”按钮 .
4. 反复按左右箭头按钮   选择“使用出厂设置”，然后按“选择”按钮 .

设置将会被恢复为出厂默认值。

问题解答

- [安装问题](#)
- [一般问题](#)
- [错误信息](#)
- [错误代码：](#)
- [提高打印质量](#)

安装问题

计算机问题

请确认您的打印机与您的计算机兼容。

打印机支持Windows XP Professional x64、Windows XP和Windows 2000操作系统。

请确认您的打印机和计算机的电源都已打开。

请检查USB电缆。

- 请确认USB电缆的两端牢固地连接在您的打印机和计算机上。
- 关闭计算机，按照 *安装您的打印机* 图表中的指导重新连接USB电缆，然后重新启动计算机。

如果软件安装界面没有自动出现，请手动安装软件。

1. 插入*Drivers and Utilities*光盘。
2. *Windows XP*: 单击开始→ 我的电脑。

Windows 2000：在计算机桌面上双击“我的电脑”图标。

3. 双击光盘驱动器图标。如有必要，再双击 **set up. exe**。
4. 当打印机软件安装界面出现后，请单击“个人安装”或“网络安装”。
5. 按照计算机屏幕上的指导完成安装。

请确认打印机软件是否已经安装。

单击开始 → 程序或所有程序 → **Dell** 打印机。

如果打印机没有出现在程序列表中，说明打印机软件还没有安装。您需要安装打印机软件。请参阅[反安装并重新安装软件](#)获取更多的信息。

解决打印机和计算机之间的通讯问题。

- 从您的打印机和计算机上断开USB电缆。重新连接USB电缆，请确认USB电缆的两端牢固地连接在您的打印机和计算机上。
- 关闭打印机电源。从电源插座上断开连接打印机的电源线。将电源线重新连接到电源插座上，然后打开打印机的电源。
- 重新启动您的计算机。

将您的打印机设置为默认打印机。

1. *Windows XP*：单击开始 → 控制面板 → 打印机和其他硬件 → 打印机和传真。

Windows 2000：单击开始 → 设置 → 打印机。

2. 右键单击打印机图标，然后单击“设为默认打印机”。

打印机不打印，并且打印作业滞留在打印队列中。

请检查您是否在计算机上安装了多个打印机驱动程序副本。

1. *Windows XP*: 单击开始→ 控制面板→ 打印机和其他硬件→ 打印机和传真。

Windows 2000: 单击开始→ 设置→ 打印机。

2. 检查您的打印机是否存在多个驱动程序副本。

3. 向每一个驱动程序副本发送一项打印作业，看哪一个是可用的。

4. 将可用的驱动程序设置为默认打印机：右键单击该驱动程序，然后单击“设为默认打印机”。

5. 删除其他的副本：右键单击要删除的驱动程序，然后单击“删除”。

为了避免您的打印机出现多个驱动程序副本，当您将打印机从计算机上断开并重新连接时，请确认将USB电缆连接在以前使用的USB端口上。另外，请不要使用您的*Drivers and Utilities*光盘多次安装打印机驱动程序。

打印机问题

请确认打印机电源线的两端牢固地连接在打印机和电源插座上。

请检查打印机是否被挂起或者被暂停。

1. *Windows XP*: 单击开始→ 控制面板→ 打印机和其他硬件→ 打印机和传真。

Windows 2000: 单击开始→ 设置→ 打印机。

2. 右键单击打印机图标。

3. 请确认“暂停打印”选项旁边没有选中标记。如果有选中标记，请单击此选项取消选中。

请查看打印机显示屏上的错误信息。

请参阅[错误信息](#)获取更多的信息。

请确认您正确地安装了打印墨盒，并且撕掉了所有打印墨盒底部的透明封条。

请确认您正确地装入了纸张。

请参阅[在纸张支架内装入纸张](#)获取更多的信息。

请确认 **Pict Bridge** 兼容数码相机没有连接在打印机上。

请参阅 [从 Pict Bridge 兼容数码相机中打印照片](#) 获取更多的信息。

一般问题

打印问题

查看墨水量。如有必要，请更换新的打印墨盒。

如要获取更多的信息，请参阅：

- [Dell 墨水管理系统](#)。
- [更换打印墨盒](#)。

请确认您随时从出纸托盘中取走纸张。

当您使用以下类型的文档时，为了避免出现污迹，请随时移开打印机送出的打印页，等墨水完全干燥后再进行叠放：

- 照片 / 光面纸
- 透明胶片
- 标签纸
- 信封
- 热转印纸

如果打印速度慢，请释放您的计算机的内存资源。

- 请关闭所有不用的应用程序。
- 请尝试尽量减小文档中照片和图像的数量和尺寸。
- 考虑为您的计算机购买更多的内存(RAM)。
- 尽量从您的系统中去除不用的字体。
- 反安装打印机软件，然后重新安装。请参阅[反安装并重新安装软件](#)获取更多的信息。
- 选择较低的打印质量。请参阅[使用打印首选项](#)获取更多的信息。

请确认您正确地装入了纸张。

请参阅[在纸张支架内装入纸张](#)获取更多的信息。

复印问题

请查看打印机显示屏上的错误信息。

请参阅[错误信息](#)获取更多的信息。

请确认扫描仪玻璃是干净的。

如果扫描仪玻璃脏了，请用清水将一块干净且不掉毛的软布润湿，然后轻轻地擦洗扫描仪玻璃。

使用去除图案功能可以从杂志或报纸中去除图案。

1. 单击开始→ 程序或所有程序→ **Del I 打印机**→ **Del I Photo All in One Printer 926**。
2. 单击“**Del I 多功能一体中心**”。
- Del I 多功能一体中心**将会出现。
3. 单击“**查看更多的复印设置**”，然后单击“**高级**”按钮。
- “**高级复印设置**”对话框将会出现。

4. 在“图案”选项卡中选中“从杂志/报纸中去除图案(过滤)”，然后单击“确定”。
5. 单击“开始复印”。

请确认文档原件或照片正确地放置在扫描仪玻璃上。

请参阅[将文档原件放置在扫描仪玻璃上](#)获取更多的信息。

检查纸张尺寸。

请确认您使用的纸张尺寸与您在操作面板上或者在*DeI I*多功能一体中心里选择的纸张尺寸相同。

如要获取更多的信息，请参阅：

- [复印模式](#)。
- [使用*DeI I*多功能一体中心](#)。

扫描问题

请查看打印机显示屏上的错误信息。

请参阅[错误信息](#)获取更多的信息。

请检查USB电缆。

- 请确认USB电缆的两端牢固地连接在您的打印机和计算机上。
- 关闭计算机，按照[安装您的打印机](#) 图表中的指导重新连接USB电缆，然后重新启动计算机。

请确认打印机软件是否已经安装。

单击开始 → 程序或所有程序 → *DeI I* 打印机。

如果您的打印机没有出现在程序列表中，说明打印机软件还没有安装。您需要安装打印机软件。请参阅[反安装并重新安装软件](#)获取更多的信息。

解决打印机和计算机之间的通讯问题。

- 从您的打印机和计算机上断开USB电缆。重新连接USB电缆，请确认USB电缆的两端牢固地连接在您的打印机和计算机上。
- 关闭打印机电源。从电源插座上断开连接打印机的电源线。将电源线重新连接在电源插座上，然后打开打印机的电源。
- 重新启动您的计算机。

如果扫描任务花费很长的时间或者导致死机，请将扫描分辨率改变为较低的数值。

1. 单击开始→ 程序或所有程序→ **Del I 打印机**→ **Del I Photo All in One Printer 926**。
2. 单击“**Del I 多功能一体中心**”。
- Del I 多功能一体中心**将会出现。
3. 单击“**查看更多的扫描设置**”。
4. 从“**选择扫描质量**”下拉列表中选择较低的扫描分辨率。
5. 单击“**开始扫描**”。

如果扫描的图像质量非常差，请将扫描分辨率改变为较高的数值。

1. 单击开始→ 程序或所有程序→ **Del I 打印机**→ **Del I Photo All in One Printer 926**。
2. 单击“**Del I 多功能一体中心**”。
- Del I 多功能一体中心**将会出现。
3. 单击“**查看更多的扫描设置**”。
4. 从“**选择扫描质量**”下拉列表中选择较高的扫描分辨率。

5. 单击“开始扫描”。

使用去除图案功能可以从杂志或报纸中去除图案。

1. 单击开始→ 程序或所有程序→ Del I 打印机→ Del I Photo All in One Printer 926。
2. 单击“Del I 多功能一体中心”。
Del I 多功能一体中心将会出现。
3. 单击“查看更多的扫描设置”，然后单击“高级”按钮。
“高级扫描设置”对话框将会出现。
4. 在“图案”选项卡中选中“从杂志/报纸中去除图案（过滤）”，然后单击“确定”。
5. 单击“开始扫描”。

如果无法扫描至应用程序，请选择其他的应用程序。

如要获取更多的信息，请参阅：

- [使用Del I 多功能一体中心](#)。
- [扫描模式](#)。

请确认文档原件或照片正确地放置在扫描仪玻璃上。

请参阅[将文档原件放置在扫描仪玻璃上](#)获取更多的信息。

请确认扫描仪玻璃是干净的。

如果扫描仪玻璃脏了，请用清水将一块干净且不掉毛的软布润湿，然后轻轻地擦洗扫描仪玻璃。

传真问题

请确认您的打印机和计算机的电源都已打开，并且正确地连接了USB电缆。

请确认将一根可用的模拟电话线连接在您的计算机上。

- 使用传真功能需要一根电话线连接在您的计算机的传真调制解调器上。
- 当使用DSL（数字用户线路）宽带服务时，请确认您在电话线上安装了一个DSL过滤器。请与您的Internet服务供应商联系获取更多的信息。
- 当尝试使用传真功能时，请确认您的计算机没有通过拨号调制解调器连接到国际互联网上。

当使用外接调制解调器时，请确认它的电源已打开，并且正确地连接在您的计算机上。

当打印机的内存已满时，请每次发送一页文档原件。

当您扫描文档原件并发送传真时，扫描图像临时保存在打印机的内存中。当传真多页文档或发送带有附件的传真时，需要使用更多的打印机内存。如果打印机的内存已满，传真速度可能会非常慢，或者可能会死机。

如果打印机接收的传真是空白的，请查看墨水量。如有必要，请更换新的打印墨盒。

如要获取更多的信息，请参阅：

- [Dell 墨水管理系统](#)。
- [更换打印墨盒](#)。

临时断开其他的设备。

如要确保打印机和调制解调器能够正常工作，请从电话线上断开所有的电话答录机或电话线分离器。

纸张问题

请确认您正确地装入了纸张。

请参阅[在纸张支架内装入纸张](#)获取更多的信息。

请只使用专为您的打印机推荐的纸张。

请参阅[打印介质指导](#)获取更多的信息。

当打印多页文档时，请装入较少数量的纸张。

请参阅[打印介质指导](#)获取更多的信息。

请确认纸张没有起皱、撕裂或损坏。

解决卡纸问题

如果卡纸发生在纸张支架位置：

1. 关闭打印机的电源。
2. 牢固地抓住纸张，然后从打印机内轻轻地拉出。
3. 打开打印机，然后重新打印您的文档。

如果您看不到卡纸：

1. 关闭打印机的电源。
2. 抬起打印机单元，将扫描仪支架固定在槽中，保持打印机单元打开。



3. 牢固地抓住纸张，然后从打印机内轻轻地拉出。
4. 关闭打印机单元。

5. 打开打印机，然后重新打印您的文档。

网络问题

检查电缆连接。

如果打印机连接在网络适配器上：

- 检查以太网电缆和USB电缆是否有明显的损坏。
- 将USB电缆的一端牢固地连接在打印机上，另一端连接在网络适配器上。
- 将以太网电缆的一端牢固地连接在网络适配器上，另一端连接在网络集线器或墙壁网络插座上。

如果打印机连接在网络中的计算机上：

- 检查USB电缆是否有明显的损坏。
- 将USB电缆的一端牢固地连接在打印机上，另一端连接在计算机上。

检查您的网络连接。

请确认打印机连接在一个可用的网络中。

请参阅网络适配器的说明文档获取安装和使用信息。

存储卡问题

请确认您使用的存储卡是打印机所支持的类型。

请参阅[从存储卡或USB闪存驱动器中打印照片](#)获取更多的信息。

请每次只插入一种存储卡。

请不要在指示灯闪烁时取出存储卡，或者触摸打印机的存储卡区域。

指示灯闪烁表示打印机正在和存储卡进行通讯。如果您取出存储卡或者触摸存储卡附近的区域，可能会出现通讯错误。

请不要同时插入多种存储卡或USB闪存驱动器。

请确认您正确地插入了存储卡。

将存储卡快速插到底。如果存储卡没有正确插入插槽中，打印机将不会读取其中的内容。




当您从存储卡中打印图像时，请确认图像的文件格式是打印机所支持的格式。

只有JPG格式和一部分TIFF格式的照片才可以直接从存储卡中打印。如果您希望打印保存在存储卡中的其他格式的照片，您必须首先将照片保存到您的计算机上，然后再打印。

请确认打印机没有连接在Pict Bridge兼容数码相机上。

请参阅[从Pict Bridge兼容数码相机中打印照片](#)获取更多的信息。

错误信息


错误信息：	问题：	解决方法：
校正问题。请撕掉打印墨盒底部的透明封条，或者参阅问题解答。按  按钮重试。	在安装打印墨盒之前，打印墨盒上的透明封条没有撕掉。	撕掉打印墨盒底部的透明封条。请参阅 更换打印墨盒 获取更多的信息。
不支持的设备格式。	打印机不支持插入的存储卡的文件系统格式。打印机只支持FAT32文件系统格式。	使用FAT32格式重新格式化存储卡。请参阅随同您的存储卡一起的说明文档获取更多的信息。
清除拖车堵塞，然后按  按钮。	打印机内的打印墨盒拖车发生了堵塞。	取出所有阻塞打印墨盒拖车通道的物体，或者关闭墨盒保护盖，然后按“选择”按钮  。
<ul style="list-style-type: none">在左侧的墨盒拖车内安装黑色或照片打印墨盒。在右侧的墨盒拖车内安装彩色打印墨盒。请同时安装两个打印墨盒。	缺少一个打印墨盒。 注意： 当以上的信息出现时，缺少的打印墨盒所对应的墨水量示意图下面将会出现一个?标记。	在左侧的打印墨盒拖车内安装黑色或照片打印墨盒，在右侧的打印墨盒拖车内安装彩色打印墨盒。请参阅 更换打印墨盒 获取更多的信息。
<ul style="list-style-type: none">左侧的打印墨盒错误。请更换打印墨盒。右侧的打印墨盒错误。请更换打印墨盒。请同时安装两个打印墨盒。	一个打印墨盒是错误的。 注意： 当以上的信息出现时，错误的打印墨盒所对应的墨水量示意图下面将会出现一个X标记。	更换错误的打印墨盒。请参阅 更换打印墨盒 获取更多的信息。

错误信息：	问题：	解决方法：
计算机没有连接	当打印机处于扫描或传真模式，但是打印机没有连接在计算机上时，您按下了“开始”按钮  。	请确认您的打印机连接在计算机上。
清除卡纸，然后按  按钮。	打印机内发生了卡纸。	清除卡纸。请参阅 解决卡纸问题 获取更多的信息。
装入纸张，然后按  按钮。	打印机内的纸张用完了。	在打印机内装入纸张，然后按“选择”按钮  继续打印。请参阅 在纸张支架内装入纸张 获取更多的信息。
没有找到可支持的文件	插入打印机内的存储卡或USB闪存驱动器中没有包含任何支持的图像。	取出存储卡或USB闪存驱动器。
连接的照相机或设备不支持 Pict Bridge。 请断开连接。	不支持连接的设备，或者 Pict Bridge 兼容数码相机没有被设置为正确的 USB 模式。	断开设备的连接，或者检查 USB 模式设置。请参阅您的数码相机的说明文档获取更多的信息。
尺寸警告 照片尺寸大于纸张尺寸。按  按钮选择新的纸张尺寸。	您装入打印机内的纸张尺寸小于所选的空白纸尺寸。	根据您的装入打印机内的纸张尺寸改变空白纸尺寸设置，或者按“选择”按钮  继续打印。
墨水量偏低	打印墨盒的墨水量偏低。当您的打印墨盒的墨水量低于 25%、15% 和 10% 时，墨水量偏低警告将会出现。	更换打印墨盒。请参阅 更换打印墨盒 获取更多的信息。
只允许同时使用一种设备或存储卡。请断开所有的设备和存储卡。	多种存储卡或设备连接在打印机上。	取出所有的存储卡并断开设备。
此功能无法在网络中使用。	如果打印机连接在网络适配器上，您将无法从存储卡或USB闪存驱动器中打印 Microsoft Office 文件。	将打印机直接连接在计算机上。
纸张类型 装入普通纸；按  按钮。 校正打印墨盒时出现。	当校正打印墨盒时，您装入纸张支架内的纸张不是普通纸。	装入普通纸，然后按“选择”按钮  。
纸张类型 装入普通纸；按  按钮。 打印样张页时出现。	当打印样张页时，您装入纸张支架内的纸张不是普通纸。	装入普通纸，然后按“选择”按钮  。
无法检测到样张页。	打印机无法扫描样张页。	重新打印样张页，然后重新尝试。

错误代码：

如果打印机显示屏上出现以下的错误代码，表明发生了高级错误。


错误代码：	错误名称：	问题：	解决方法：
错误 0000	NVRAM R/ W	读取或写入NVRAM时发生了错误。	按“电源”按钮  重新启动打印机。
错误 0001	内存错误	打印机无法初始化内存。	按“电源”按钮  重新启动打印机。
错误 0002	硬件错误	发生了一般硬件错误，打印机无法检测出硬件系统的哪一部分发生了错误。	按“电源”按钮  重新启动打印机。
错误 0003	ROM校验和错误	只读存储器的校验和发生了错误。	按“电源”按钮  重新启动打印机。
错误 1003	纸张校准错误	打印机无法初始化或校准进纸系统。	断开打印机的电源线，检查是否发生了卡纸，然后重新连接电源线。
错误 0200	闪存编程 - 内存不足	打印机无法进行闪存编程。	按“电源”按钮  重新启动打印机。
错误 1201	打印未完成（发送到打印机的数据有错误或需要更多的数据）	在打印作业完成之前，打印机拖车停止了。	按“电源”按钮  重新启动打印机。
错误 1202	数据错误	从计算机向打印机发送了错误的数据。	按“电源”按钮  重新启动打印机。
错误 1203	打印头短路	打印头电路发生了短路。	断开并重新连接打印机的电源线。重新安装打印墨盒。请参阅 更换打印墨盒 获取更多的信息。
错误 1205	黑白TSR错误	由于黑白TSR电路出现了问题，打印机无法确定打印头的温度。	重新安装黑色打印墨盒。请参阅 更换打印墨盒 获取更多的信息。
错误 1206	彩色TSR错误	由于彩色TSR电路出现了问题，打印机无法确定打印头的温度。	重新安装彩色打印墨盒。请参阅 更换打印墨盒 获取更多的信息。
错误 1207	纸张系统错误	纸张系统控制发生了错误。	按“电源”按钮  重新启动打印机。
错误 2200	扫描拖车停止	在扫描作业过程中，扫描拖车停止了。	关闭打印机的电源，等待几秒钟，然后重新打开打印机。

 **注意：** 如果错误没有解决，请与客户技术支持联系：www.support.dell.com

提高打印质量

如果您对文档的打印质量不满意，以下方法可以帮助您提高打印质量。

- 使用适当的纸张。例如，如果您使用照片打印墨盒打印照片，请使用Dell 优质照片纸。
- 使用比较厚重、比较亮白、或者带有涂层的纸张。如果您使用照片打印墨盒打印照片，请使用Dell 优质照片纸。

 **注意：** Dell 优质照片纸可能只在某些国家 / 地区才可以买到。

- 选择较高的打印质量设置。

如要选择较高的打印质量设置：

1. 打开您的文档，从应用程序中单击“文件→打印”。

“打印”对话框将会出现。

2. 在“打印”对话框中，单击“首选项”、“属性”、“选项”或“设置”（取决于您的应用程序或者操作系统）。

打印首选项界面将会出现。

3. 在“打印设置”选项卡中选择较高的质量设置。

4. 重新打印您的文档。

5. 如果打印质量仍然没有提高，请尝试校正或清洗打印墨盒。请参阅[校正打印墨盒](#)和[清洗打印墨盒喷头](#)获取更多的信息。

如要获取更多的问题解答信息，请访问国际互联网站support.dell.com

打印机规格

- [概述](#)
- [环境规格](#)
- [能源消耗和要求](#)
- [打印和扫描模式性能](#)
- [操作系统支持](#)
- [操作系统规格和要求](#)
- [打印介质指导](#)
- [电缆](#)

概述

内存	<ul style="list-style-type: none">● 32 MB SDRAM● 4 MB 闪存
连接性	USB 2.0 高速
工作循环 (平均)	3,000 页 / 月
打印机寿命	<ul style="list-style-type: none">● 打印机 : 18,000 页● 扫描仪 : 18,000 次● 自动文档传送器(ADF) : 18,000 次

环境规格

温度 / 相对湿度

条件	温度	相对湿度 (非冷凝)
工作	61 ° - 90 ° F	8 - 80%
储存	34 ° - 140 ° F	5 - 80%
运输	-14 ° - 140 ° F	5 - 100%

能源消耗和要求

额定交流输入	110 VAC
额定频率	60 Hz
最小交流输入	90 VAC
最大交流输入	255 VAC
最大输入电流	0.31 A
平均能源消耗	
待机模式	6.01 W
工作模式	12.2 W

打印和扫描模式性能


您的打印机可以使用72- 19,200 dpi 的分辨率进行扫描。尽管您的打印机具备此性能，Dell 建议您使用默认的分辨率。

打印和扫描分辨率	扫描分辨率	打印分辨率	
		照片 / 光面纸	所有其他介质
高速	150 x 150 dpi	600 x 600 dpi	300 x 600 dpi
正常	300 x 300 dpi	1200 x 1200 dpi	600 x 600 dpi
照片	600 x 600 dpi (照片和黑白扫描)	4800 x 1200 dpi	1200 x 1200 dpi
	300 x 300 dpi (彩色扫描)		

操作系统支持

您的打印机支持以下的操作系统：

- Windows XP Professional x64
- Windows XP
- Windows 2000

 **注意：** 如要获取M st a的兼容驱动程序，请访问网站www.support.dell.com

操作系统规格和要求

您的计算机必须满足以下的最小系统需求。

操作系统	处理器速度(MHz)	内存	空余硬盘空间
Windows 2000	Pent ium II 233	128 MB	286 MB
Windows XP	Pent ium II 300	128 MB	500 MB
Windows XP 64位	AMD At hl on 64、AMD Opt er on、带有Int el EM64T支持的Int el Xeon、带有Int el EM64T支持的Int el Pent ium 4	256 MB	1.5 GB

打印介质指导

介质类型：	支持的尺寸：	最多可以装入：
普通纸或涂层纸	<ul style="list-style-type: none">Let t er : 8.5 x 11 英寸 (216 x 279 毫米)A4 : 8.27 x 11.69 英寸 (210 x 297 毫米)Legal : 8.5 x 14 英寸 (216 x 355.6 毫米)	100张
横幅纸	<ul style="list-style-type: none">A4横幅Let t er 横幅	20张
信封	<ul style="list-style-type: none">9 Envel opes : 3 7/8 x 8 7/8 英寸10 Envel opes : 4 1/8 x 9 1/2 英寸Baroni al 5 1/2 Envel opes : 4 3/8 x 5 3/4 英寸6 3/4 Envel opes : 3 1/4 x 6 1/2 英寸7 3/4 Envel opes : 3 7/8 x 7 1/2 英寸A2 Baroni al Envel opes : 111 x 146 毫米B5 Envel opes : 176 x 250 毫米C5 Envel opes : 162 x 229 毫米C6 Envel opes : 114 x 162 毫米DL Envel opes : 110 x 220 毫米Chokei 3 Envel opes : 120 x 235 毫米Chokei 4 Envel opes : 90 x 205 毫米Chokei 40 Envel opes : 90 x 225 毫米Kakugat a 3 Envel opes : 216 x 277 毫米Kakugat a 4 Envel opes : 197 x 267 毫米Kakugat a 5 Envel opes : 190 x 240 毫米Kakugat a 6 Envel opes : 162 x 229 毫米	10个
贺卡专用纸、索引卡、明信片或照片卡	<ul style="list-style-type: none">照片 / 明信片 : 4 x 6 英寸索引卡 : 3 x 5 英寸	25张

介质类型：	支持的尺寸：	最多可以装入：
照片 / 光面纸	<ul style="list-style-type: none">• 8.5 x 11 英寸 (216 x 279 毫米)• 4 x 6 英寸 (101.6 x 152.4 毫米)	25张
热转印纸	8.5 x 11 英寸 (216 x 279 毫米)	1张
透明胶片	8.5 x 11 英寸 (216 x 279 毫米)	50张

电缆

本打印机使用通用串行总线 (USB) 电缆 (单独出售)。



附录

- [Dell 技术支持规定](#)
 - [联系 Dell](#)
 - [有限保修和退回规定](#)
-

Dell 技术支持规定

由技术人员辅助进行的技术支持在故障排除过程中需要客户的合作和参与。该技术支持的目的是将操作系统、应用程序软件和硬件驱动程序恢复至 Dell 出厂时的初始默认配置，以及验证打印机和所有 Dell 安装的硬件的功能。除了这种由技术人员辅助的技术支持外，还可以使用 Dell 网站上的在线技术支持。用户还可以购买其他技术支持选项。

Dell 为其打印机和所有 Dell 安装的软件和外围设备提供有限的技术支持。对第三方软件和外围设备的支持均由原始制造商提供，包括通过软件和外围设备（Dell Väre）、ReadyVäre 和定制工厂集成服务（CFI / Dell Plus）购买和 / 或安装的软件和外围设备。

联系 Dell

您可以访问 Dell 的国际互联网站 support.dell.com 获取技术支持。在 WELCOME TO DELL SUPPORT 页面中选择您所在的地区，然后填写所需的详细资料以便获取帮助工具和信息。

您可以使用以下的电子地址与 Dell 联系：

- 国际互联网站

www.dell.com

www.dell.com/ap（仅限于亚洲 / 太平洋国家和地区）

www.dell.com/jp（仅限于日本）

www.euro.dell.com（仅限于欧洲国家和地区）

www.dell.com/la（仅限于拉丁美洲国家和地区）

- 匿名文件传输协议 (FTP)

[ftp.dell.com](ftp://ftp.dell.com)

登录用户名为 anonymous，使用您的电子邮件地址作为密码。

- 电子技术支持服务

mobile_support@s.dell.com

support@s.dell.com

apsupport@dell.com(仅限于亚洲 / 太平洋国家和地区)

support.jp.dell.com/jp/jp/tech/email (仅限于日本)

support.euro.dell.com(仅限于欧洲国家和地区)

- 电子报价服务

apmarketing@dell.com(仅限于亚洲 / 太平洋国家和地区)

有限保修和退回规定

Dell Inc. ("Dell") 使用符合行业标准规范的全新或相当于全新的部件和组件制造其硬件产品。如要了解与您的打印机相关的 Dell 保修信息，请参阅*用户指南*。

许可协议通告

● [BSD License and Warranty statements](#)

● [GNU License](#)

打印机固有软件包括：

- 由Del I 和 / 或第三方开发和拥有版权的软件。
- 由Del I 修改、并且在GNU General Public License version 2和GNU Lesser General Public License version 2.1的基础上获得许可的软件。
- 在BSD License and Warranty Statements的基础上获得许可的软件。
- 部分基于Independent JPEG Group的工作的软件。

由Del I 修改、经过GNU许可的软件是免费软件；您可以在上述许可协议条款的限制下发布和 / 或修改此软件。这些许可协议并没有为您提供任何与Del I 或第三方打印机软件相关的权利。

经过GNU许可并提供给Del I 进行修改的软件不带有任何的质量保证，因此使用Del I 修改的版本同样不带有任何的质量保证。请参阅许可协议中的质量保证否认声明获取更详细的信息。

如要获取由Del I 修改、经过GNU许可的软件的源代码文件，请插入随同您的打印机一起提供的*Drivers and Utilities*光盘，然后单击“联系Del I”；或者请参阅您的*用户指南*中的“联系Del I”章节。

BSD License and Warranty statements

Copyright (c) 1991 The Regents of the University of California. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

3. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS'' AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

GNU License

GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.

59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will

not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you". Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a. You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b. You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c. If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective

works based on the Program

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a. Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b. Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c. Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

1 April 1989

Lexmark International, Inc.

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Library General Public License instead of this License.

GNU LESSER GENERAL PUBLIC LICENSE

Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.

59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems

that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is less protective of the users' freedom, it does ensure that the user of a program that is linked with the library has the freedom and the wherewithal to run that program using a modified version of the library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straight forwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a. The modified work must itself be a software library.

b. You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.

c. You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.

d. If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that

version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a. Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b. Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying

library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c. Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d. If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e. Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a. Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b. Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to

refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns. Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

1 April 1990

Lexmark International, Inc.

That 's all there is to it!