


Dell Wyse Cloud Client

Wyse 5010

Quick Start Guide




1 Install the vertical stand

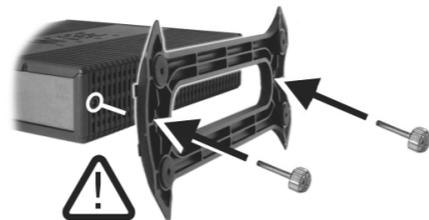


Or use Dell-approved mounting accessory kit

2 Connect the keyboard and mouse



USB Connector

3 Connect the network




Network connector

Or



Wireless antenna

Or



Fiber SFP module

NOTE: To remove the Fibre SFP module, rotate the latch and unplug it from its slot.

Product support and manuals

dell.com/support
dell.com/support/manuals

Contact Dell

dell.com/contactdell

Regulatory and safety

dell.com/regulatory_compliance

Regulatory model

Dx0D

Client device model

Dell Wyse Cloud Client
Wyse 5010




0N2T7HA00

© 2015 Dell Inc.


Printed in China.
2015-05

4 Connect the display




Display Port connector

Or




DVI-I connector

Or




VGA adapter

5 Connect the power cable on your client device and display



Client device power connector




Display power connector


NOTE: Your client device is ready to use when the client device activity light goes off.

6 Turn on your client device and display

Features

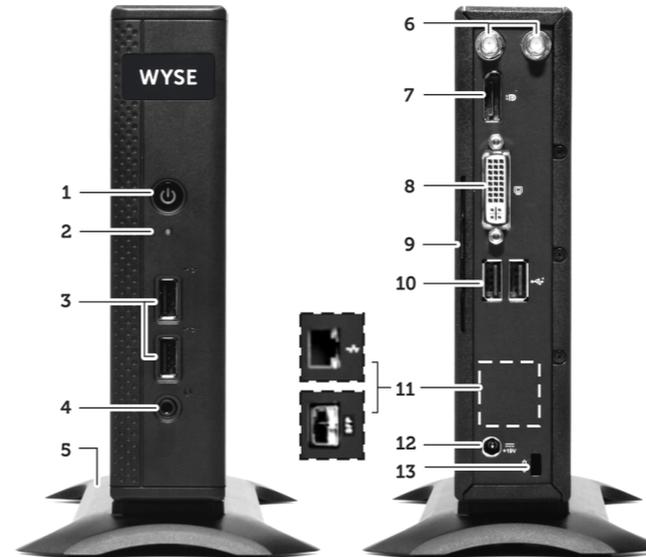

- | | |
|--|---|
| 1. Power on/off button and light | 11. Network port, 10/100/1000 Base-T or SFP |
| 2. Activity light | 12. +19V Power adapter input |
| 3. USB 2.0 port (2x) | 13. Lock recptacle |
| 4. Headphone/microphone jack | |
| 5. Vertical Stand | |
| 6. Wireless antenna port (2x) (optional) | |
| 7. Display Port connector | |
| 8. DVI-I port [1x DVI-D / 1x VGA] | |
| 9. Product Information tab | |
| 10. USB 2.0 port (2x) | |

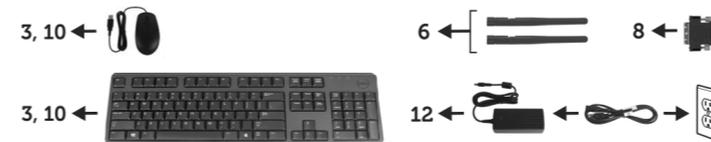

NOTE: Components may vary based on model and location.