




Dell DL1300 Appliance Release Notes



Notes, cautions, and warnings

-  **NOTE:** A NOTE indicates important information that helps you make better use of your computer.
-  **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.
-  **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

© 2016 Dell Inc. All rights reserved. This product is protected by U.S. and international copyright and intellectual property laws. Dell and the Dell logo are trademarks of Dell Inc. in the United States and/or other jurisdictions. All other marks and names mentioned herein may be trademarks of their respective companies.

2016 - 05

Rev. A00

Contents

1 Introduction.....	6
About DL1300 Dell Appliance.....	6
About DL Appliance Software.....	6
Other information you may need.....	6
Registering your appliance on the license portal.....	7
2 Known issues and limitations for Rapid Recovery.....	9
Download DL Appliance Log feature fails.....	9
Repository creation fails during provisioning with the trial license activated.....	9
Expand option on the provisioning page is missing.....	10
VM operation buttons are missing on the VM Management page.....	10
Some symbols are displayed as numeric codes in the backup link.....	10
Winbackup feature does not function using the Backup now button.....	10
An incorrect link is displayed in the Backup Status message.....	11
Appliance Backup tab freezes when creating a RASR USB drive.....	11
Error message displayed when creating a RASR USB drive in the Appliance Backup tab.....	11
Error displayed when you click the virtual standby tab	11
Cannot recover the DVM repository after remounting volumes if one of the mount points was removed on your appliance.....	12
DVM Repository created in Rapid Recovery 6.0 cannot be mounted in AppAssure 5.4.3.....	12
After upgrading to Rapid Recovery 6.0, Recovery and Update Utility fails to start after a reboot.....	12
On upgrading the Core from AppAssure 5.4.3 to Rapid Recovery 6.0, the Core Console does not launch automatically.....	13
Error displayed when remounting volumes.....	13
Rapid Recovery 6.0 displays an error when ESX(i) host is offline.....	13
3 Known issues and limitations for AppAssure.....	14
Trial licenses do not have SQL functionality.....	14
The Provisioning tab does not refresh after upgrading your license.....	14
On remounting volumes an error occurs when one of the mount points is removed on the appliance.....	14
Content in the DL Appliance Backup tab is missing after running the Recovery and Update Utility.....	15
Provisioning virtual drive for standby Virtual Machine fails on the second PowerEdge RAID Controller	15
At times nonlocalized messages are displayed in the AppAssure Core and the AppAssure Event log.....	15

Recovery and Update Utility build 99 fails	16
The Remount volumes button on Appliance tab does not remount the repository volume.....	16
When remounting volumes on the Provisioning page a new job with an error status is created.....	17
AppAssure Core upgrade fails when performed manually.....	17
Unable to recover the Appliance with Windows Recovery Wizard when booting from a USB drive.....	17
Disk status does not display correctly after hard drives are removed from the MD1400 enclosure.....	18
Dell DL Appliance Applications fail with an error during the Recovery and Update Utility.....	18
On rebooting your appliance a random drive letter is assigned to the Repository VD.....	18
Remount fails for both controllers after a Recovery and Update Utility (version # 184) upgrade and a factory restore.....	19
Do not use underscore in the hostname.....	19
Error displayed while creating the RASR USB key.....	19
View Policy in the appliance tab responds slowly.....	19
Error displayed when the hostname of your appliance is configured and added to a domain.....	19
Status of Appliance tab indicator is yellow if the RASR USB drive is not created.....	20
Appliance tab does not have any content.....	20
"Collecting..." message remains on the screen while collecting DL Appliance logs.....	20
Appliance tab loses functionality.....	20
VM Operations buttons for virtual standby are active while VM export is being performed.....	21
Status of Hypervisor information for ESX(i) is shown offline if status for Hyper-V is changed to offline.....	21
Non-RAID 5 configurations are not supported on your appliance.....	21
Installing the wrong RUU causes features in the DL Appliance to hang.....	21
AppAssure Appliance Configuration Wizard fails to complete.....	21
Incorrect message displayed in AppAssure Appliance Configuration Wizard when OpenManage Server Administrator service is disabled.....	22
OpenManage Server Administrator Issues.....	22
OpenManage Server Administrator fails to install properly.....	22
OpenManage Server Administrator fails to update status.....	22
Recovery and Update Utility takes time to complete.....	23
Desktop shortcut for AppAssure not displayed for domain users.....	23
Core console shortcut is not updated with hostname change.....	23
Error message does not close when trying to exit AppAssure Appliance Configuration Wizard....	23
License key installation failure	24
License key installation and AppAssure Appliance Configuration Wizard fails.....	24
Incorrect message displayed for license configuration failure.....	24
Removal Of USB Drive Fails.....	24

4 Getting help.....26

Contacting Dell.....	26
Documentation feedback.....	26

Introduction

This document describes important product information and restrictions for the Dell DL1300 Appliance running AppAssure and Rapid Recovery.

About DL1300 Dell Appliance

The DL1300 appliance is designed for a range of environments. The short 15.5–inches depth, low–power draw, acoustics make the DL1300 ideal for space-constrained office environments. The appliance is available in 2 TB, 3 TB, and 4 TB provisioned backup capacity (with an option for up to two standby virtual machines supported on 3 TB and 4 TB configurations).

Optimized for quick deployment and efficiency, the DL1300:



- Helps reduce your backup window.
- Creates snapshots as often as every 60 minutes.
- Cloud archive connector simplifies moving archives to a cloud storage subscription (supported providers are Microsoft Azure, Amazon S3, OpenStack and RackSpace) allowing you to replace tape infrastructure.
- Maintains up to two standby VMs to quickly restore critical servers (with proper edition).
- Offers integrated, inline block-level deduplication and compression, combined with optimized backups for WAN replication.
- Provides a wizard–based configuration utility to automatically provision DL1300 storage and iDRAC Express for remote management.

About DL Appliance Software

The Dell DL Appliance software offers near-zero recovery time objectives and recovery point objectives. More than disaster recovery, DL Appliance software offers data solutions for data migration and management. You have the flexibility of performing bare-metal restore (to similar or dissimilar hardware), and you can restore backups to physical or virtual machines, regardless of origin. The DL Appliance software can also archive to the cloud, to a Dell DL series backup and recovery appliance, or to a supported system of your choice. With the DL Appliance software, you can replicate to one or more targets for added redundancy and security.

For more information, see: <https://support.software.dell.com>.

Other information you may need

-  **NOTE:** For all Dell OpenManage documents, go to Dell.com/openmanagemanuals.
-  **NOTE:** Always check for updates on Dell.com/support/home and read the updates first because they often supersede information in other documents.

 **NOTE:** For any documentation related to Dell OpenManage Server Administrator, see Dell.com/openmanage/manuals.

Your product documentation includes:

Getting Started Guide	Provides an overview of setting up your system, and technical specifications. This document is shipped with your system.
System Placemat	Provides information on how to set up the hardware and install the software on your appliance.
Owner's Manual	Provides information about system features and describes how to troubleshoot the system and install or replace system components.
Deployment Guide	Provides information on hardware deployment and the initial deployment of the appliance.
User's Guide	Provides information about configuring and managing the system.
Release Notes	Provides product information and additional information on the Dell DL1300 Appliance.
Interoperability Guide	Provides information on supported software and hardware for your appliance as well as usage considerations, recommendations, and rules.
OpenManage Server Administrator User's Guide	Provides information about using Dell OpenManage Server Administrator to manage your system.


Registering your appliance on the license portal

1. In your web browser, navigate to the License Portal at the website URL that was provided to you in the email you received upon purchase.
2. On the **Register** page, in the **Email Address** text box, enter the email address associated with your contract.
3. Enter the license number or service tag for your appliance.
If you have multiple appliances, press the <Enter> key after you enter a service tag or license number to enter additional numbers.
4. Click **Activate**.
If the email address that you entered is not registered on the License Portal (in case of a new License Portal account), you are prompted to create an account in the License Portal using that email address.
5. Enter the information to create an account in the License Portal.
After you register, you are logged on to the License Portal. An activation email is also sent to your email address.
6. A notification of successful registration appears, which also lists the license key. This notification describes the instructions for you to apply the license key to your appliance as follows:
 - a. Launch the Core Console for your appliance.
 - b. Go to **Configuration** → **Licensing**.
 - c. Click **Change License**.
 - d. Copy and paste the software license key included in the successful registration notification message, and then save your changes.

7. Click **OK**.

For more detailed information, refer to the *Dell Software License Portal User Guide* available at <http://documents.software.dell.com/AppAssure/>.

Known issues and limitations for Rapid Recovery

 **NOTE:** Rapid Recovery version 6.0.2 is available. If upgrading from a localized version of a previous release (such as AppAssure 5.4.3), note that the upgraded Rapid Recovery components, including the Core Console and the PowerShell module, are only available in English.

Download DL Appliance Log feature fails

Description	On clicking Collect Logs on the Download DL Appliance Log panel, no results are displayed. Download DL Appliance Log doesn't work with Rapid Recovery 6.0.2.
Workaround/Solution	To manually locate the logs in your system: <ol style="list-style-type: none"> 1. Click Collect Logs. Wait until Collect Server Logs background job is finished. The job status can be tracked in the Core GUI either on the Events tab or running tasks drop-down in the upper-right corner of the page. 2. Go to, C:\ProgramData\AppRecovery\OMSA_logs. The zip file in this folder contains all the collected logs.

Repository creation fails during provisioning with the trial license activated

Description	The error message: <code>Task failed with the following error: Error creating AppAssure Repository 1. The maximum repository size is limited by the license and should not exceed <n> TB. Please contact your account manager for more information</code> is displayed when you try provisioning storage. The Core doesn't identify the trial license's storage limit for repository creation and tries to create the repository for the entire storage available on the appliance.
Workaround/Solution	Complete storage provisioning on AppAssure Core 5.4.3. An upgrade to Rapid Recovery should be performed only after the storage provisioning is completed and the repository is created in AppAssure Core 5.4.3.

Expand option on the provisioning page is missing

Description	Expand option on the Provisioning page is missing after upgrading to Rapid Recovery 6.0.2.
Workaround/ Solution	<ol style="list-style-type: none">1. Go to the Repository tab.2. Click Add Storage location next to the Repository you want to expand.3. Specify a path that points to the Repository volume (The path is available under the following mount point: C:\DLDisks\<<RepositoryName>\disk_<UniqueDiskIdentifier>) Specify a folder for the new repository files in the path name. It is recommended to use File_X as a name of the folder. The existing repository has File_0 or File_1 as a folder name.4. Enter the size of the expansion by using the following formula: Expand size = Total Licensed Capacity – Current Repository Size5. Confirm the repository configuration.

VM operation buttons are missing on the VM Management page

Description	VM operations buttons (start/stop) are not available on VM Management page. The Virtual Standby page is displayed instead.
Workaround/ Solution	Go to the corresponding hypervisor (Hyper-V or ESXi) and make the setting changes.


Some symbols are displayed as numeric codes in the backup link

Description	Some symbols are displayed as numeric codes in the backup link on the Appliance page on the Health tab in the Portuguese Rapid Recovery core.
Workaround/ Solution	The backup link points to the Backup page in the Appliance tab. You can navigate to the page manually.



Winbackup feature does not function using the Backup now button

Description	The Winbackup feature can't be forced using the Backup now button on the View Windows Backup Policy . The Backup now button is inactive on the popup page.
Workaround/ Solution	Click the Backup now button on the Appliance Backup page.

An incorrect link is displayed in the Backup Status message

Description	When creating a Windows backup, the backup fails. The following information appears in the Error Action field: <code>Retry by clicking on the "Configure" link on the Configuration pane below.</code> The Configure link does not exist.  NOTE: Ensure that the backup target disks are available before proceeding to the workaround.
Workaround/ Solution	Click the Backup Now button.

Appliance Backup tab freezes when creating a RASR USB drive

Description	When creating a RASR USB drive, the Appliance Backup tab freezes.  NOTE: You can still access other pages on the Core Console. You can track the RASR USB drive creation progress on the Events tab of the Core.
Workaround/ Solution	Wait until the RASR USB drive is created before accessing the Backup tab.  NOTE: It takes approximately 30 minutes to create the RASR USB drive.

Error message displayed when creating a RASR USB drive in the Appliance Backup tab


Description	An error message: <code>The following critical files and/or directory paths required for RASR USB drive creation are missing: winre.wim, bootmgr, bmr</code> may appear in the Appliance Backup tab.
Workaround/ Solution	Wait till the RASR USB is created and refresh the page.

Error displayed when you click the virtual standby tab

Description	The server does not respond when several export jobs are running simultaneously.
Workaround/ Solution	Close the error and retry the action.

Cannot recover the DVM repository after remounting volumes if one of the mount points was removed on your appliance

Description Recovering a DVM repository fails on Appliances if the repository was provisioned on several controllers and one of the mount points was removed.

 **NOTE:** Ensure you use the PERC H330 controller to create the initial repository.

**Workaround/
Solution**

1. Assign drive letters to volumes with storage locations of the repository.
2. Manually restore Core settings or use the **Open Existing Repository** option through the **Repositories** pane specifying valid paths for repositories.

DVM Repository created in Rapid Recovery 6.0 cannot be mounted in AppAssure 5.4.3

Description After a factory restore on the Appliance, the DVM repository on Rapid Recovery 6.0 cannot be mounted to AppAssure 5.4.3 due to changes in how repositories are identified.

**Workaround/
Solution**

Upgrade to Rapid Recovery 6.0 and then use the **Open Existing Repository** option. If a repository was created in Rapid Recovery 6.0, and after a factory restore the repository exists in AppAssure 5.4.3, then immediately (the first step in the Appliance GUI) upgrade to Rapid Recovery 6.0.

After upgrading to Rapid Recovery 6.0, Recovery and Update Utility fails to start after a reboot

Description When using the Dell DL Appliance Recovery and Update Utility (RUU), a failed script error message appears after a system reboot. The core services cannot be started automatically.

**Workaround/
Solution**

Manually restart the RUU, wait until it completes and then launch the Core Console using the desktop icons.

 **NOTE:** Do not launch the Core Console while the RUU is running.

On upgrading the Core from AppAssure 5.4.3 to Rapid Recovery 6.0, the Core Console does not launch automatically

Description	After upgrading the Core from AppAssure 5.4.3 to Rapid Recovery 6.0, you are prompted to restart the system. On restarting the system the <code>startAA.vbs</code> script does not open the Core Console but displays a Windows Script Host error.
Workaround/Solution	After upgrading to Rapid Recovery 6.0, manually start the Core Console by clicking the icon on the desktop.

Error displayed when remounting volumes

Description	When recovering a DVM repository the following error is displayed: <code>Failed read consistency lock on IsSpare_AC or MediaPresent_DiskDriveToStorageExtent_AC Association Cache</code> . The error occurs when a repository was provisioned on several controllers and one of the mount points was removed.
--------------------	---



 **NOTE:** Ensure you use the PERC H330 controller to provision storage.

Workaround/Solution	<ol style="list-style-type: none">1. Assign drive letters to volumes with storage locations of the repository.2. Manually restore Core settings or Open Existing Repository through the Repositories pane specifying valid paths for repositories.
----------------------------	---

Rapid Recovery 6.0 displays an error when ESX(i) host is offline

Description	After exporting ESX(i) virtual standby, if the state of ESX(i) host is offline, the error: <code>Unable to connect to the remote server now</code> is displayed.
Workaround	If an ESXi server backed Virtual Standbys exist, ensure all hosting ESXi servers are up and operational.

Known issues and limitations for AppAssure

-  **NOTE:** It is recommended that you change the host name by using the **AppAssure Appliance Configuration Wizard**. If the configuration has completed, then manually change the computer name to the previous name.
-  **NOTE:** Do not create or delete Virtual Disks on the HDDs. This can create issues with storage provisioning and/or repository recovery.

Trial licenses do not have SQL functionality

Description	Every DL Appliance is provided with a trial license during the initial configuration but the trial license does not support SQL functionality.
Workaround/Solution	To enable the SQL feature, activate the purchased license.

The Provisioning tab does not refresh after upgrading your license

Description	On upgrading your license and expanding the repository, the Provision tab does not refresh.
Workaround/Solution	If the Provision tab does not refresh, you can still proceed with the expand operation. The system has additional verification logic that takes the real license into account.

On remounting volumes an error occurs when one of the mount points is removed on the appliance

Description	The error <i>Failed read consistency lock on IsSpare_AC or MediaPresent_DiskDriveToStorageExtent_AC Association Cache</i> is displayed when repository was provisioned on several controllers and one of the mount points was removed.
Workaround/Solution	<ol style="list-style-type: none"> 1. Restart Core's Service. 2. To get access to the disks, proceed to the Disk Management and assign a letter to both repository disks.

3. To view **Open Existing DVM Repository** window, click **Open Existing Repository** button from the **Repositories** tab. Enter the path of repository in the **Path** field that corresponds to the volumes with assigned letters (step 2).
4. Click **Open**.
5. Fix storage paths for current repository by clicking the **Change** link.
6. Specify both location paths that correspond to the volumes with assigned letters (step 2).
7. Click **OK**.
8. Refresh the **Repositories** tab.

Content in the DL Appliance Backup tab is missing after running the Recovery and Update Utility

Description	After you recover your Appliance through the Recovery and Update Utility (RUU) and restart the AppAssure Core Web Console, content in the Appliance Backup tab goes missing if a web browser is open while the RUU is running.
Workaround/Solution	Clear the browser cache, close the browser, and start the AppAssure Core Web Console.

Provisioning virtual drive for standby Virtual Machine fails on the second PowerEdge RAID Controller

Description	If a repository exists on the first Controller, you cannot provision virtual drive for standby Virtual Machines on the second PowerEdge RAID Controller. When you click the Provision tab next to the secondary controller, the following error message is displayed: <code>DL1300 supports only one repository.</code>
Workaround/Solution	<ol style="list-style-type: none"> 1. Expand the existing repository with VM creation by upgrading your license. 2. Provision 100% of the 'optional storage reserve' space for standby VM. To do that: In the optional storage Reserve section, select 100 in the drop-down for <code>Allocate a portion of the storage being provisioned for standby VMs</code>, and then click Provision.

At times nonlocalized messages are displayed in the AppAssure Core and the AppAssure Event log

Description	Sometimes nonlocalized messages are displayed in the AppAssure Core (lower-right corner of the screen) and the AppAssure Event log.
Workaround/Solution	Restart the Core, WMI and SRM Web Service services, then empty the browser cache and restart the browser.

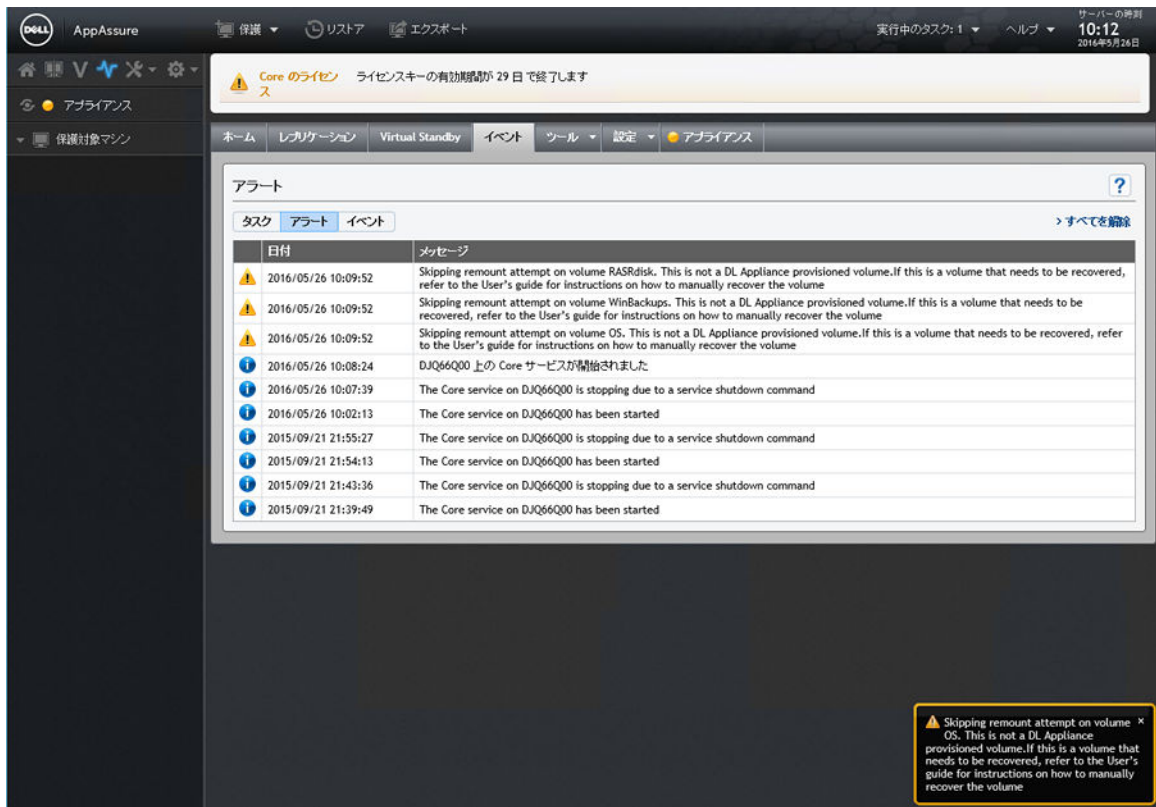


Figure 1. Nonlocalized messages displayed in the AppAssure Core and the AppAssure Event log

Recovery and Update Utility build 99 fails

Description	Recovery and Update Utility (RUU) build 99 fails on DL Appliances during a Rapid Appliance Self Recovery (RASR) update.
Workaround/Solution	Do not use build 99. If you have installed build 99, upgrade to the latest RUU.

The Remount volumes button on Appliance tab does not remount the repository volume

Description	If a mount point is deleted in a repository disk, the Remount volumes button on Appliance tab does not work.
Workaround/Solution	To restore the volume mount point: <ol style="list-style-type: none"> 1. Open the Repository tab and expand the error repository. 2. Copy the repository file path. 3. Open Operating system Disk Manager: Server Manager → Tools → Computer Management → Disk Management. 4. Find the repository disk, the name of the disk contains repository information.

5. Right-click the disk and select **Change drive letter and paths**.
6. Click **Add**.
7. Select **Mount** in the NTFS folder.
8. Paste the path copied in step 2.
9. To remove File_X, edit the path. (For example, if the path of the repository is C:\DLDisks\Repository 1\disk_1234567890\File_0, you have to change it to C:\DLDisks\Repository 1\disk_123456790)
10. Click **OK**.
11. Repeat for all the repository paths that you can see in step 2 if they differ. Ignore the File_X number, if the rest of the path is the same, you do not have to repeat this step.
12. After all failed repository paths are restored, go to **Configuration** → **Repositories** tab, and click **check repository**.

When remounting volumes on the Provisioning page a new job with an error status is created

Description	On remounting volumes on the Provisioning page a new job with an error status is created. This issue occurs after rebooting the appliance from a Rapid Appliance Self Recovery (RASR) USB drive and performing a factory reset.
Workaround/Solution	Remove all USB drives when provisioning.

AppAssure Core upgrade fails when performed manually


Description	This issue occurs when trying to upgrade the Core outside the Recovery and Update Utility (RUU) process.
Workaround/Solution	<p>Before performing the Core update, stop the following services:</p> <ul style="list-style-type: none"> • Dell Storage Management Web Service • DSM SA Connection Service • DSM SA Data Manager • DSM SA Event Manager • DSM SA Shared Services <p>Restart the services after the update.</p>

Unable to recover the Appliance with Windows Recovery Wizard when booting from a USB drive

Description	When a USB drive is formatted as a RASR USB drive, the appliance does not recognize the USB drive and displays it as a Fixed Disk in the operating system.
Workaround/Solution	Do not use any USB drives that shows up as a Fixed Disk in the operating system.

Disk status does not display correctly after hard drives are removed from the MD1400 enclosure

Description On the **Controller** page under the **Appliance** tab, the disk status changes to yellow for hard drives that were not removed from the controller and remain green for hard drives that were removed.

 **NOTE:** This issue occurs if the **Controller** page was open and you have tried to remove the drives while the page was open.

**Workaround/
Solution** Refresh the page or wait for 30 seconds.

Dell DL Appliance Applications fail with an error during the Recovery and Update Utility

Description Dell DL Appliance Applications fail with the error `There was an error while installing Dell DL Appliance during the Recovery and Update Utility (RUU).`

**Workaround/
Solution** Contact support. RUU is an important tool that introduces many changes to the environment, if some of the steps cannot be executed, the system might be left in an inconsistent state.

On rebooting your appliance a random drive letter is assigned to the Repository VD

Description After provisioning and rebooting the appliance the drive letter for the repository disk changes after Remount of Volumes.


**Workaround/
Solution** If the letter is assigned to the volume, it can be removed using the Disk Management tool. However, if the repository has already been expanded using the assigned letter, the repository becomes unreachable. To workaround this issue:

1. Go to **Repositories** tab.
2. Click **fix repository paths** button.
3. For the failed repository, replace the unreachable paths (that contain the removed volume letter) with a valid path.
4. Save changes and run the repository check.

Remount fails for both controllers after a Recovery and Update Utility (version # 184) upgrade and a factory restore

Description	The remount volume was not able to restore the mount point previously used by the VM volume because the volume letter was reassigned to other removable devices.
Workaround/ Solution	Remove all removable media from the system and then run Remount Volumes again.

Do not use underscore in the hostname

Description	 CAUTION: It is recommended not to use underscore in the hostname, the Open Manage Server Administrator (OMSA) portal may not work.
Workaround/ Solution	For the new host name to take effect, manually change the hostname through the operating system and restart the appliance.

Error displayed while creating the RASR USB key

Description	While creating the RASR USB key, the following message is displayed: <code>Unable to connect to Dell storage management Web service. Try restarting the Windows Management Instrumentation service, and then restart the Dell Storage Management Web and reload this page.</code>
Workaround/ Solution	Ignore this message.

View Policy in the appliance tab responds slowly

Description	When you click the View Policy button, it changes appearance, but takes some time for the dialog box to display. If you interact with the user interface during this delay, the following message is displayed: <code><hostname> is not responding.</code>
Workaround/ Solution	Wait for this message to disappear.

Error displayed when the hostname of your appliance is configured and added to a domain

Description	When you change the hostname of your appliance and add it to a domain with an identical hostname, the following message is displayed: <code>A critical error occurred while trying to configure the hostname and domain settings. Ensure that hostname does not already exist in the</code>
-------------	---

domain. If the issue persists, close the AppAssure Appliance Configuration Wizard, delete the configuration file below and restart the wizard. C:\Program Files\Dell\PowerVault\Appliances\DL\FTBU\FTBU.dat If the issue still persist, contact Dell support further assistance.

**Workaround/
Solution** Reboot your appliance to join the domain.

Status of Appliance tab indicator is yellow if the RASR USB drive is not created

Description It is recommended to create the RASR USB drive when the AppAssure Appliance Configuration Wizard is running. If the RASR USB drive is not created, then the Rapid Appliance Self Recovery status on the **health** page turns yellow. This in turn causes the Appliance tab indicator to turn yellow.

Appliance tab does not have any content

Description When you click the Appliance tab, the content inside the table is not displayed. The following error message is displayed instead: `The following error occurred during the previous installation attempt.` This typically happens when the AppAssure core is updated in RUU, and the AppAssure core is open in a browser.

**Workaround/
Solution** Clear browser cache. Go to **Internet Options** in IE, click **General** → **Browsing history** → **delete browsing history** and press **Delete**. Restart the browser.

"Collecting..." message remains on the screen while collecting DL Appliance logs

Description "Collecting..." message remains on the screen while trying to collect logs in AppAssure Core through **Tools** → **Diagnostics** → **View Logs**.

**Workaround/
Solution** Press F5 to refresh the browser.

Appliance tab loses functionality

Description Occasionally, you may see that Appliance tab does not respond. The rotating progress button is stuck.

**Workaround/
Solution**

1. Restart **Internet Information Service Manager**.
2. Restart the services in the given order:
 - a. Windows Management Instrumentation
 - b. SRM Web Service

- c. AppAssureCore
3. Clear the browser cache.
4. Refresh the page.

VM Operations buttons for virtual standby are active while VM export is being performed

Description	While the VM export is in progress, the VM operation buttons Start and Add Network Adapter are enabled.
Workaround/Solution	Do not click these buttons until the corresponding VM export is complete.

Status of Hypervisor information for ESX(i) is shown offline if status for Hyper-V is changed to offline

Description	When virtual standbys for the protected machines are created on two different hypervisors, ESX(i) and Hyper-V, if the Hyper-V virtual machine management system is stopped after the export job is completed, then the status of Hypervisor information for ESX(i) displays incorrectly.
--------------------	--

Non-RAID 5 configurations are not supported on your appliance

The user cannot manually provision storage in a non-RAID 5 configuration because AppAssure supports RAID-5 configuration only.

Installing the wrong RUU causes features in the DL Appliance to hang

Description	Installing the incorrect Recovery and Update Utility (RUU) on your DL Appliance causes features to break or not work properly.
Workaround/Solution	Every DL Appliance has a unique RUU. To download the correct RUU, go to www.Dell.com/support , click Servers, Storage, & Networking → Dell Storage → Dell DL1300 → Drivers & downloads → Category → IDM → Dell PowerVault DL Recovery and Update Utility .

AppAssure Appliance Configuration Wizard fails to complete

Description	The AppAssure Appliance Configuration Wizard fails to complete, if the user terminates the process or if a device error occurs.
--------------------	---

**Workaround/
Solution** Rerun the AppAssure Appliance Configuration Wizard using the shortcut on the desktop.

Incorrect message displayed in AppAssure Appliance Configuration Wizard when OpenManage Server Administrator service is disabled

Description The following error message is displayed in the AppAssure Appliance Configuration Wizard:

```
A critical error occurred while running prerequisite checks.  
Call Dell support for further assistance.
```

**Workaround/
Solution**

1. Navigate to **Server Manager** → **Tools** → **Services** → **DSM SA Data Manager** → **properties** → **Startup type**.
2. Select **Automatic**.
3. Log out and log in again to restart AppAssure Appliance Configuration Wizard.

OpenManage Server Administrator Issues

Description OpenManage Server Administrator may not always function properly due to the complex interactions between the various subsystems in the DL1300 Appliance.

**Workaround/
Solution** Restart the DSM SM Data Manager service.

OpenManage Server Administrator fails to install properly

Description In rare instances when using the Recovery and Update Utility, OpenManage Server Administrator may not install properly.

**Workaround/
Solution** Manually delete OpenManage by clicking **Start** → **Control Panel** → **Uninstall a program** → **Dell OpenManage Systems Management Software**, and then manually reinstall the software.

OpenManage Server Administrator fails to update status

Description OpenManage Server Administrator sometimes fails to update the status, and the OpenManage Server Administrator status does not match the status displayed on the **Appliance** tab **Overall Status** screen.

**Workaround/
Solution** Navigate to **Server Manager** → **Tools** → **Services**, and then stop and restart the **DSM SA Data Manager** service.



NOTE: The **Services** window may direct you to restart other services. If the issue remains after restarting the services, restart the appliance.

Recovery and Update Utility takes time to complete

Description	When running the Recovery and Update Utility when joined to a domain, the completion time exceeds 90 minutes.
Workaround/Solution	To expedite the Recovery and Update Utility, log on to the machine as a local administrator. Do not log on to the domain. Start the Recovery and Update Utility, and then log on to the domain.

Desktop shortcut for AppAssure not displayed for domain users

Description	For domain users without administrator privileges, the desktop shortcut for AppAssure software is not displayed.
Workaround/Solution	The AppAssure software desktop shortcut is displayed only for users with administrator privileges. Log on the appliance as a local admin or a user with administrative privileges.

Core console shortcut is not updated with hostname change

Description	After the hostname of the system (with AppAssure Core Console installed on it) is changed, the AppAssure Core Console shortcut located under Start → AppAssure → Core is not updated with the new hostname.
Cause	This issue occurs after you change the hostname of the system using AppAssure Appliance Configuration Wizard, close the AppAssure Console and delete its desktop shortcut.
Workaround/Solution	Do not delete the desktop shortcut for the AppAssure Core Console.

Error message does not close when trying to exit AppAssure Appliance Configuration Wizard

Description	If you try to close the AppAssure Appliance Configuration Wizard after an error in storage provisioning, a message prompts you to wait. The appliance stops responding and you cannot close the displayed message.
Workaround/Solution	Restart the Appliance, the AppAssure Appliance Configuration Wizard should start automatically.

License key installation failure

Description	Appliance does not display a red X for Software License after the license keys for various components fail to install.
Workaround/ Solution	Run the license key installation again.

License key installation and AppAssure Appliance Configuration Wizard fails

Description	<p>Configuration of the appliance fails when incorrect data (for example, incorrect host name, domain credentials, and so on) is entered in using the AppAssure Appliance Configuration Wizard.</p> <p>The AppAssure Appliance Configuration Wizard may continue to fail after restarting as the AppAssure services are not automatically restarted.</p> <p>License key installation also fails if the AppAssure services are not running.</p>
Workaround/ Solution	<ol style="list-style-type: none">1. Close the AppAssure Appliance Configuration Wizard.2. Manually restart AppAssure services.3. Restart the AppAssure Appliance Configuration Wizard.

Incorrect message displayed for license configuration failure

Description	<p>The following incorrect error message is displayed for license configuration failure:</p> <pre>A critical error occurred. Click 'Back' to try again. If the issue persists, contact Dell Support for assistance</pre>
Workaround/ Solution	<ol style="list-style-type: none">1. Close the AppAssure Appliance Configuration Wizard.2. Manually restart AppAssure services.3. Restart the AppAssure Appliance Configuration Wizard.

Removal Of USB Drive Fails

Description	Clicking the Safely Remove USB Drive option on the Create RASR USB drive page may fail.
Workaround/ Solution	Use Safely Remove Hardware and Eject Media option in the Windows task bar before removing the USB drive. If this also fails, then log off the system and log in

again. Retry using **Safely Remove USB Drive** option or **Safely Remove Hardware and Eject Media** option in the task bar.



NOTE: The Backup status remains yellow. You can correct this by rebooting the appliance or restarting the *Dell Storage Management Web Service*.

Getting help

Contacting Dell

Dell provides several online and telephone-based support and service options. If you do not have an active Internet connection, you can find contact information on your purchase invoice, packing slip, bill, or Dell product catalog. Availability varies by country and product, and some services may not be available in your area.

To contact Dell for sales, technical support, or customer-service issues, go to software.dell.com/support.

Documentation feedback

Click the **Feedback** link in any of the Dell documentation pages, fill up the form, and click **Submit** to send your feedback.