

Dell OptiPlex 7070 Ultra

Service Manual

Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

© 2019 Dell Inc. or its subsidiaries. All rights reserved. Dell, EMC, and other trademarks are trademarks of Dell Inc. or its subsidiaries. Other trademarks may be trademarks of their respective owners.

1 Working on your computer	5
Safety instructions	5
Turning off your computer — Windows 10	5
Before working inside your device	6
After working inside your device	6
2 Major components of your system	8
3 Removing and installing components	9
Recommended tools	9
Screw List	9
Hard-drive assembly	9
Removing the hard-drive assembly	9
Installing the hard-drive assembly	10
Hard-drive bracket	12
Removing the hard-drive bracket	12
Installing the hard-drive bracket	12
Hard drive	13
Removing the hard drive	13
Installing the hard drive	14
Cover	15
Removing the cover	15
Installing the cover	16
Memory modules	17
Removing the memory module	17
Installing the memory module	18
WLAN card	19
Removing the WLAN card	19
Installing the WLAN card	20
Solid state drive	21
Removing the solid-state drive	21
Installing the solid-state drive	22
System fan	23
Removing the system fan	23
Installing the system fan	23
Power button	24
Removing the power button	24
Installing the power button	25
Coin-cell battery	27
Removing the coin-cell battery	27
Installing the coin-cell battery	28
System board	29
Removing the system board	29
Installing the system board	30

Heat-sink.....	32
Removing the heat-sink.....	32
Installing the heat-sink.....	33
Replacing the chassis.....	35
4 System setup.....	36
Boot menu.....	36
Navigation keys.....	36
Boot Sequence.....	37
System setup options.....	37
General options.....	37
System information.....	38
Video.....	39
Security.....	39
Secure boot.....	40
Intel Software Guard Extensions.....	41
Performance.....	41
Power management.....	42
POST behavior.....	43
Manageability.....	43
Virtualization support.....	43
Wireless.....	44
Maintenance screen.....	44
System logs.....	45
Advanced Configuration.....	45
Updating the BIOS in Windows	45
Updating BIOS on systems with BitLocker enabled.....	46
Updating your BIOS from the F12 One-Time Boot Menu.....	46
Updating your system BIOS using a USB flash drive.....	46
System and setup password.....	47
Assigning a system setup password.....	47
Deleting or changing an existing system setup password.....	47
5 Troubleshooting.....	49
Enhanced Pre-Boot System Assessment (ePSA) diagnostics.....	49
Running the ePSA diagnostics.....	49
WiFi power cycle.....	49
Diagnostic LED.....	50
6 Getting help.....	52
Contacting Dell.....	52

Working on your computer

Safety instructions

Prerequisites

Use the following safety guidelines to protect your computer from potential damage and to ensure your personal safety. Unless otherwise noted, each procedure included in this document assumes that the following conditions exist:

- You have read the safety information that shipped with your computer.
- A component can be replaced or, if purchased separately, installed by performing the removal procedure in reverse order.

About this task

 **NOTE:** Disconnect all power sources before opening the computer cover or panels. After you finish working inside the computer, replace all covers, panels, and screws before connecting to the power source.

 **WARNING:** Before working inside your computer, read the safety information that shipped with your computer. For additional safety best practices information, see the [Regulatory Compliance Homepage](#)

 **CAUTION:** Many repairs may only be done by a certified service technician. You should only perform troubleshooting and simple repairs as authorized in your product documentation, or as directed by the online or telephone service and support team. Damage due to servicing that is not authorized by Dell is not covered by your warranty. Read and follow the safety instructions that came with the product.

 **CAUTION:** To avoid electrostatic discharge, ground yourself by using a wrist grounding strap or by periodically touching an unpainted metal surface at the same time as touching a connector on the back of the computer.

 **CAUTION:** Handle components and cards with care. Do not touch the components or contacts on a card. Hold a card by its edges or by its metal mounting bracket. Hold a component such as a processor by its edges, not by its pins.

 **CAUTION:** When you disconnect a cable, pull on its connector or on its pull-tab, not on the cable itself. Some cables have connectors with locking tabs; if you are disconnecting this type of cable, press in on the locking tabs before you disconnect the cable. As you pull connectors apart, keep them evenly aligned to avoid bending any connector pins. Also, before you connect a cable, ensure that both connectors are correctly oriented and aligned.

 **NOTE:** The color of your computer and certain components may appear differently than shown in this document.

 **CAUTION:** System will shut down if side covers are removed while the system is running. The system will not power on if the side cover is removed.

 **CAUTION:** System will shut down if side covers are removed while the system is running. The system will not power on if the side cover is removed.

 **CAUTION:** System will shut down if side covers are removed while the system is running. The system will not power on if the side cover is removed.

Turning off your computer — Windows 10

About this task

 **CAUTION:** To avoid losing data, save and close all open files and exit all open programs before you turn off your computer or remove the side cover.

Steps

1. Click or tap .
2. Click or tap  and then click or tap **Shut down**.

i **NOTE:** Ensure that the computer and all attached devices are turned off. If your computer and attached devices did not automatically turn off when you shut down your operating system, press and hold the power button for about 6 seconds to turn them off.

Before working inside your device

About this task

To avoid damaging your device, perform the following steps before you begin working inside the device:

Steps

1. Ensure that you follow the [Safety Instruction](#).
2. Ensure that your work surface is flat and clean to prevent the device cover from being scratched.
3. Turn off your device.
4. Remove the device from the stand:

Removing device from Fixed-height stand or Height-adjustable stand:

- a) Disconnect the keyboard/mouse, network, power adapter, and USB Type-C cable from the device.

⚠ CAUTION: To disconnect a network cable, first unplug the cable from your device and then unplug the cable from the network device.

- b) Slide the release latch on the stand until you hear a click to release the stand cover.
- c) Slide and lift the back cover to release it from the stand.
- d) Pull the retention latch that secures the device to the stand cover.
- e) Lift the device from the cover.

Removing device from offset VESA mount:

- a) Disconnect the keyboard/mouse, network, power adapter, and USB Type-C cable from the device.
- b) Push the quick release button on the VESA mount.
- c) Slide and remove the monitor arm from the offset VESA mount (U/P-series monitor).

i **NOTE:** For E-series monitor, remove the VESA cover.

- d) Remove the four screws that secure the offset VESA mount to the monitor.
- e) Remove the four holders on which the offset VESA mount is mounted.
- f) Lift the offset VESA mount from the monitor.
- g) Remove the four screws that secure the device to the offset VESA mount.
- h) Lift the device away from the offset VESA mount.

5. Press and hold the power button while the device is unplugged to ground the system board.

i **NOTE:** To avoid electrostatic discharge, ground yourself by using a wrist grounding strap or by periodically touching an unpainted metal surface at the same time as touching a connector on the back of the computer.

After working inside your device

About this task

After you complete any replacement procedure, ensure that you connect any external devices, cards, and cables before turning on your computer.

Steps

1. Install the device in the stand:
Installing the device on Fixed-height stand or Height-adjustable stand:

- a) Unlock the latch on the lower chassis of the stand to remove the stand cover.
- b) Align and position the top side of the device to the upper chassis of the stand back cover.
- c) Align the power button on the device with the slot on the stand back cover chassis.
- d) Press the device until the retention latch clicks into place and secures it.
- e) Connect the keyboard/mouse, network, power adapter, and USB Type-C cable to the device.

 **CAUTION: To connect a network cable, first plug the cable into the network device and then plug it into the device.**

- f) Slide the back cover, along with the device, into the stand until it clicks into place.
- g) Lock the stand cover.


Installing the device on offset VESA mount:

- a) Align the screw holes on the device to the screw holes on the offset VESA mount.
- b) Install the four screws to secure the device to the offset VESA mount.
- c) Align the screw holes in the offset VESA mount with the screw holes on the back cover of the monitor.
- d) Install the four screws to secure the offset VESA mount to the monitor.
- e) Align the tabs on the adapter that is attached to the stand, with the slots on the back of the monitor.
- f) Slide the tabs on the stand adapter into its slots on the monitor.
- g) Connect the keyboard/mouse, network, power adapter, and USB Type-C cable to the device.

 **CAUTION: To connect a network cable, first plug the cable into the network device and then plug it into the device.**

- 2. Turn on your device.
- 3. If required, verify that the device works correctly by running **ePSA diagnostics**.

Major components of your system

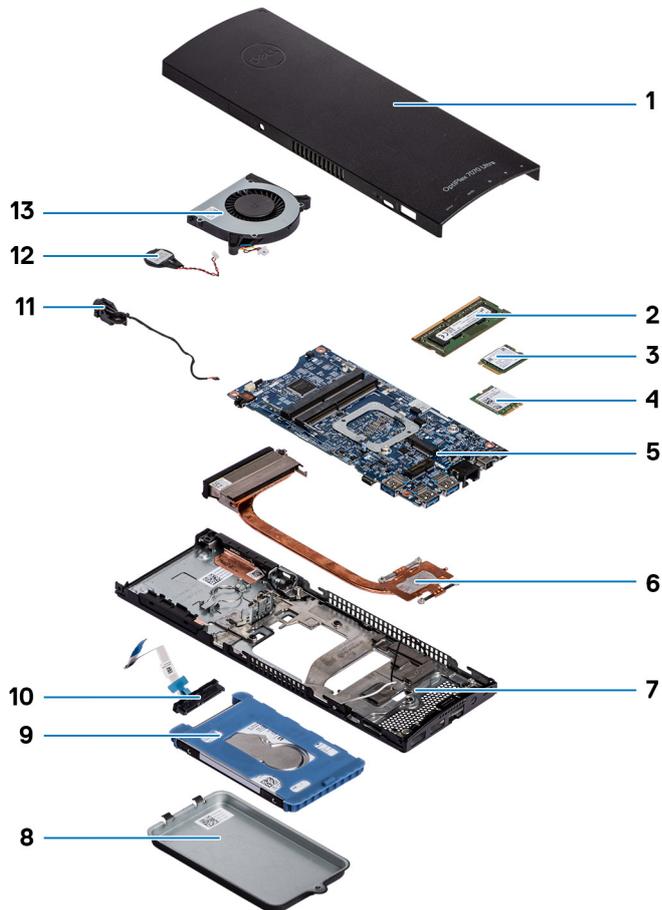

1. Cover
2. Memory modules
3. Solid-state drive
4. WLAN card
5. System board
6. Heat sink
7. Chassis
8. Hard-drive assembly
9. Hard-drive bracket
10. Hard-drive cable
11. Power-button cable
12. Coin-cell battery
13. System fan

i NOTE: Dell provides a list of components and their part numbers for the original system configuration purchased. These parts are available according to warranty coverages purchased by the customer. Contact your Dell sales representative for purchase options.

Removing and installing components

Recommended tools

The procedures in this document require the following tools:

- Phillips #0 screwdriver
- Phillips #1 screwdriver
- Plastic scribe

Screw List

The following table shows the screw list and the images for different components.

Table 1. Screw Size List

Component	Screw type	Quantity	Image
Power button	M2x3	1	
System board	M2x3	4	
HDD bracket (or non HDD bracket)	M2x3	1	
M.2 WLAN	M2x3.5	1	
M.2 SSD	M2x3.5	1	

Hard-drive assembly

Removing the hard-drive assembly

Prerequisites




1. Follow the procedure in [Before working inside your device](#).

About this task

The figure indicates the location of the hard-drive assembly module and provides a visual representation of the removal procedure.



1x
M2x3

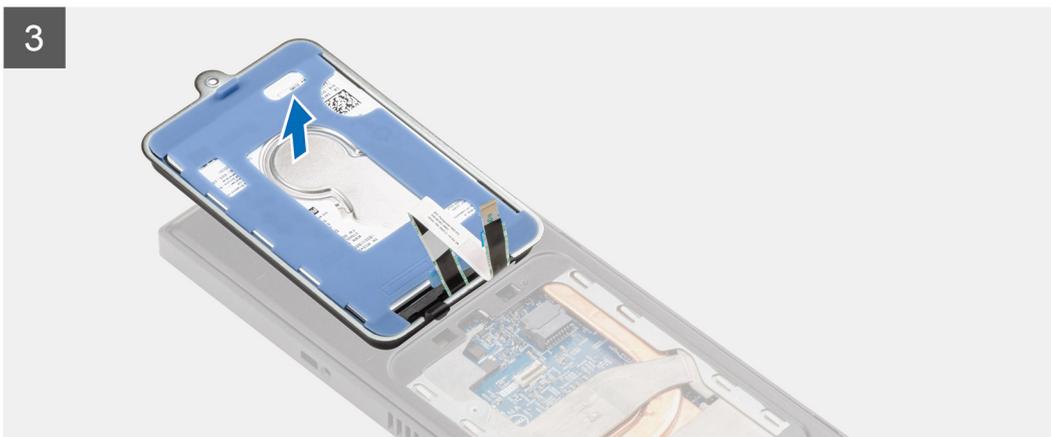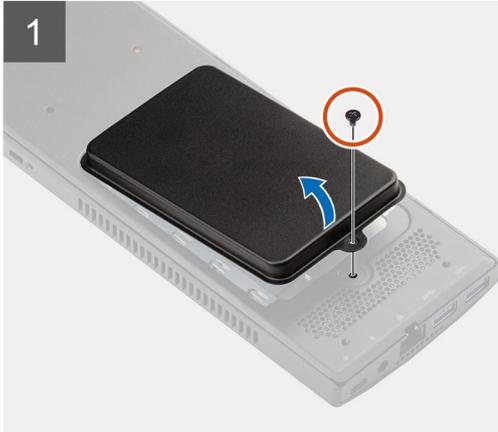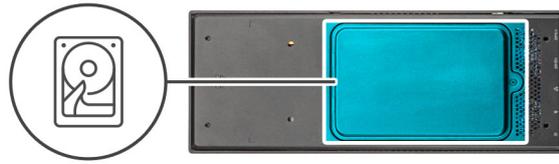

Steps

1. Remove the M2x3 screw that secures the hard-drive assembly to the cover.
2. Turn the hard-drive assembly.
3. Lift the cable release latch and disconnect the hard-drive cable from the connector on the system board.
4. Carefully unrout the hard-drive cable from the slot on the chassis.

i NOTE: Observe the routing of the hard-drive cable inside the chassis as you remove them. Route the cable properly when you replace the component to prevent the cable from from being pinched or crimped.

5. Remove the hard-drive assembly.

Installing the hard-drive assembly

Prerequisites




If you are replacing a component, remove the existing component before performing the installation procedure.

About this task

The figure indicates the location of the hard-drive assembly module and provides a visual representation of the installation procedure.



1x
M2x3

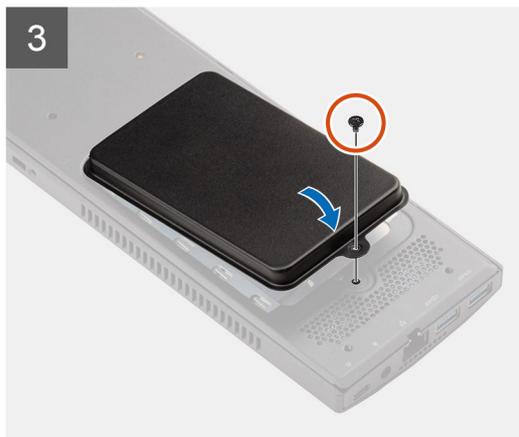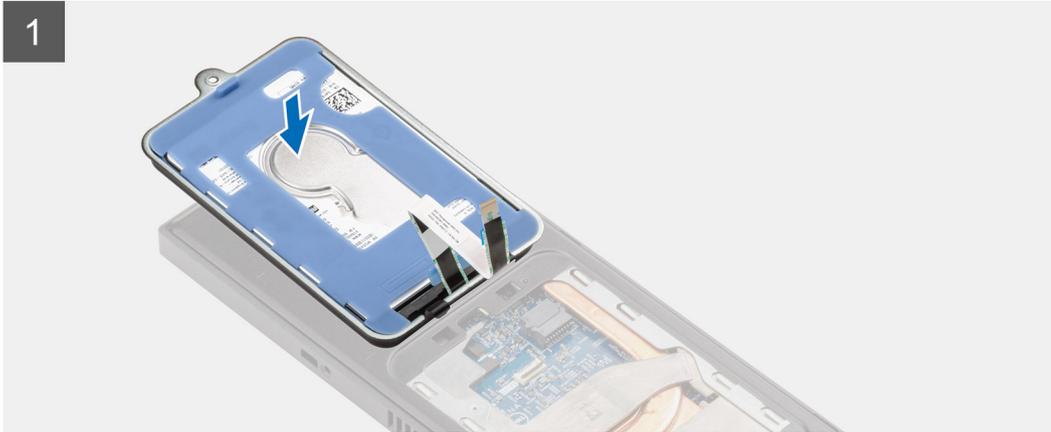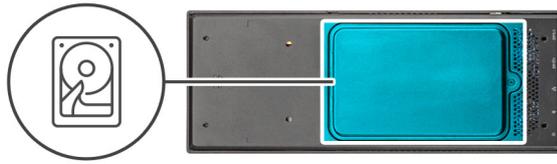

Steps

1. Place the hard-drive assembly on the cover.
2. Route the hard-drive cable through the slot on the chassis.
3. Connect the hard-drive cable to the connector on the system board.
4. Route the hard-drive cable to the release latch.
5. Turn the hard-drive assembly module and align the tabs on the hard-drive assembly with the slots on the chassis.
6. Align the screw hole on the hard-drive assembly module with the screw hole on the cover.
7. Replace the M2x3 screw to secure the hard-drive assembly module to the cover.

Next steps

1. Follow the procedure in [After working on your device](#).

Hard-drive bracket

Removing the hard-drive bracket

Prerequisites

1. Follow the procedure in [Before working inside your device](#).
2. Remove the [hard-drive assembly](#).

About this task



Steps

Pull the rubber tab on the protective sleeve and lift the hard-drive module out from the hard-drive bracket.

Installing the hard-drive bracket

Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

About this task



Steps

1. Align the connector edge of the hard-drive module with the tab end of the hard-drive bracket.

2. Place the hard-drive module in the hard-drive bracket.

Next steps

1. Install the [hard drive assembly](#).
2. Follow the procedure in [After working on your device](#).

Hard drive


Removing the hard drive

Prerequisites

1. Follow the procedure in [Before working inside your device](#).
2. Remove the [hard-drive assembly](#).
3. Remove the [hard-drive bracket](#).

About this task

The figure indicates the location of the hard-drive module and provides a visual representation of the removal procedure.

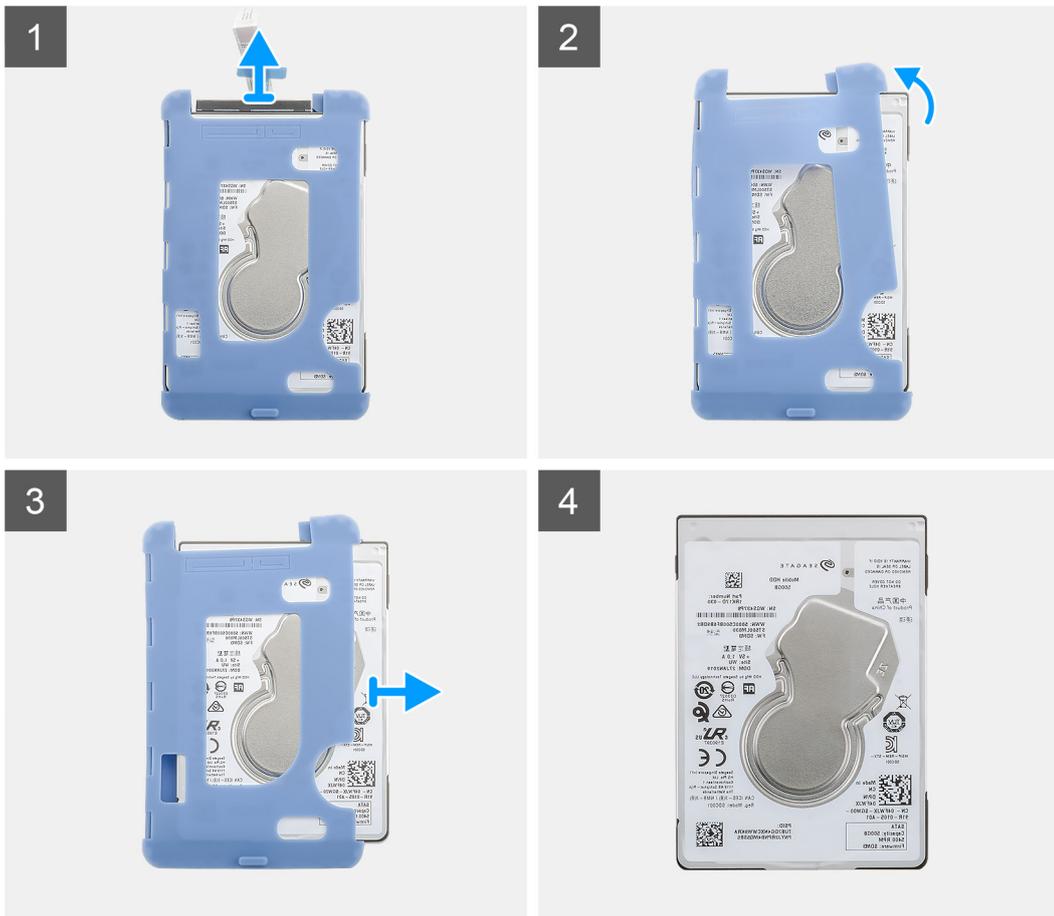

Steps

1. Disconnect the hard-drive cable from the connector on the hard drive.
2. Release the protective sleeve from one side of the hard-drive edges.
3. Gently pull the hard-drive out of the protective sleeve.


Installing the hard drive

Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

About this task

The figure indicates the location of the hard-drive module and provides a visual representation of the installation procedure.

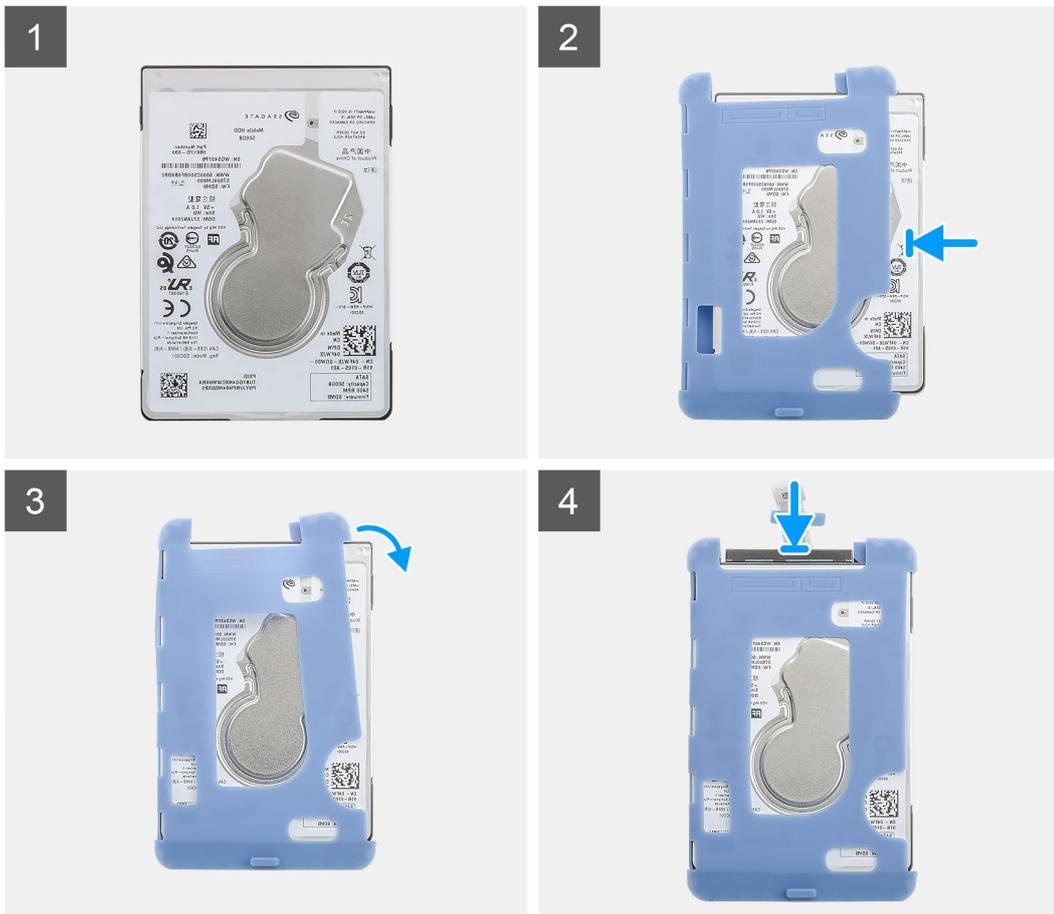

Steps

1. Insert the hard drive into the protective sleeve.

i **NOTE:** Ensure to match the mark on the protective sleeve with the hard drive PIN and connector location.

2. Pull the protective sleeves along the hard-drive edges.
3. Connect the hard-drive cable to the connector on the hard drive.

Next steps

1. Install the [hard-drive bracket](#).
2. Install the [hard drive assembly](#).
3. Follow the procedure in [After working on your device](#).

Cover

Removing the cover

Prerequisites

1. Follow the procedure in [Before working inside your device.](#)

About this task

The figure indicates the location of the cover and provides a visual representation of the removal procedure.



Steps

1. Slide the cover to release it from the chassis.
2. Lift the cover.


Installing the cover

Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

About this task

The figure indicates the location of the cover and provides a visual representation of the installation procedure.

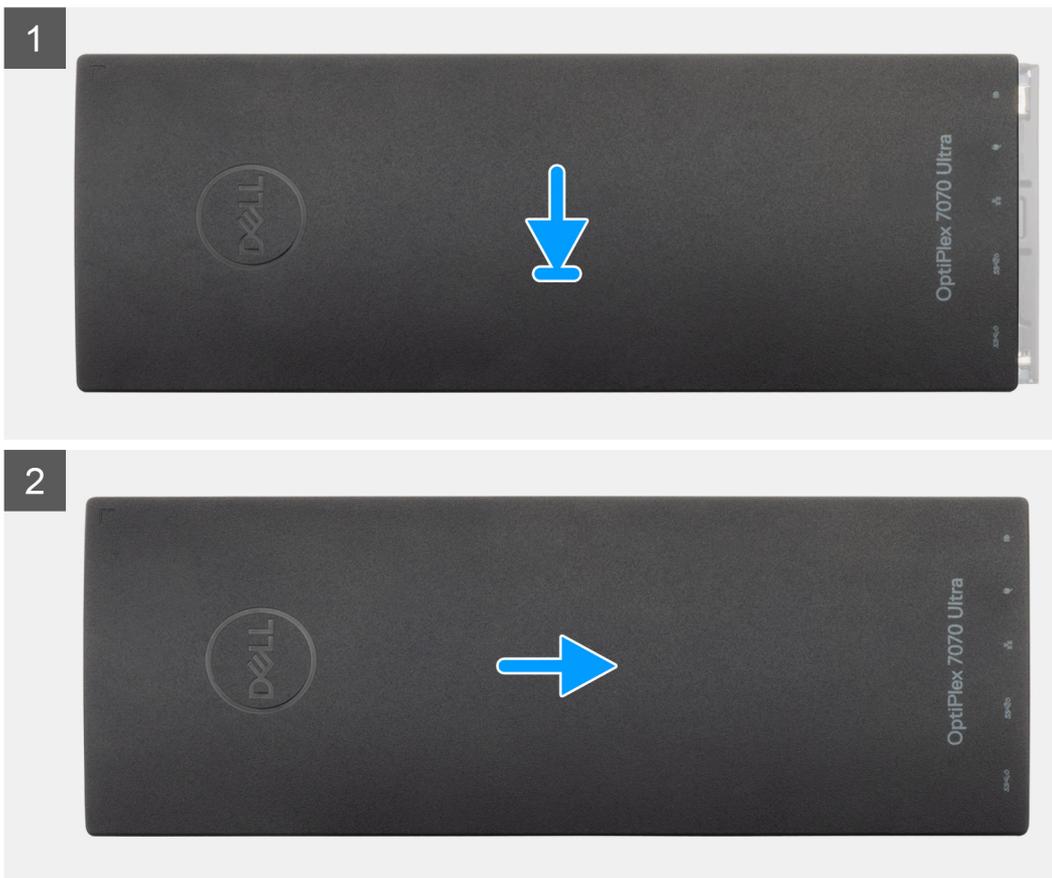

Steps

1. Align the tabs on the cover with the slots on the chassis.
2. Slide the cover until it clicks into place.

Next steps

1. Follow the procedure in [After working on your device](#).

Memory modules





Removing the memory module

Prerequisites

1. Follow the procedure in [Before working inside your device](#).
2. Remove the [cover](#).

About this task

The figure indicates the location of the memory module and provides a visual representation of the removal procedure.

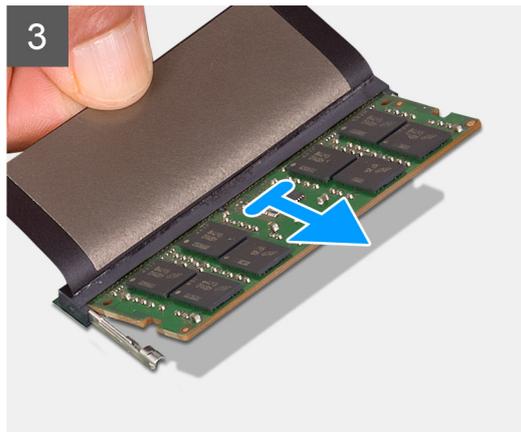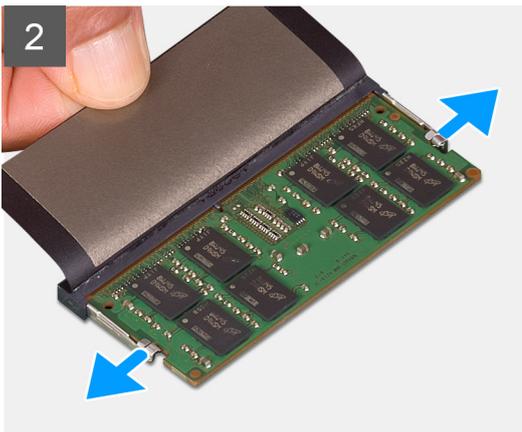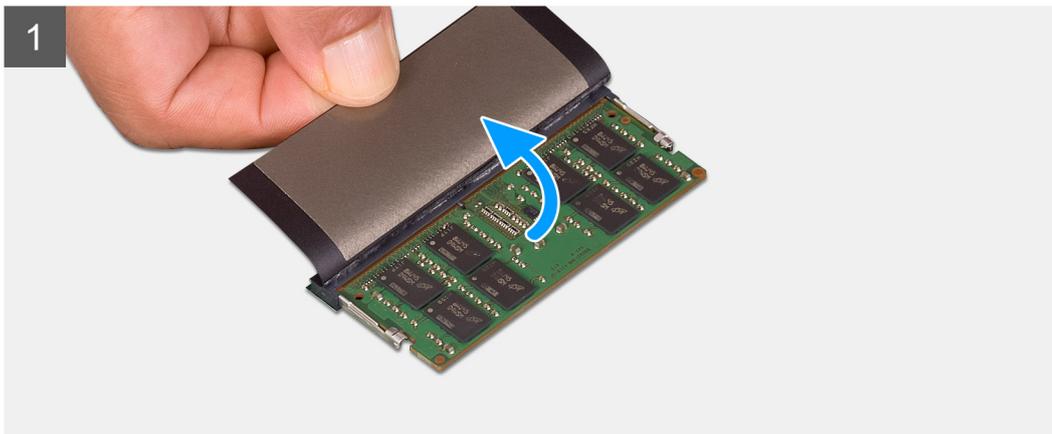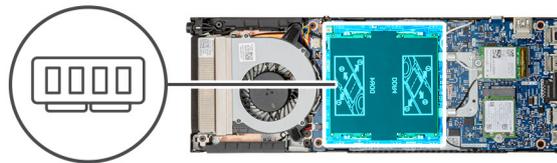

Steps

1. Lift the absorber above the memory module.
2. Gently pry the retention clips away from the memory module until the memory module pops up.
3. Slide and remove the memory module from the memory-module slot on the system board.



Installing the memory module

Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

About this task

The figure indicates the location of the memory module and provides a visual representation of the installation procedure.

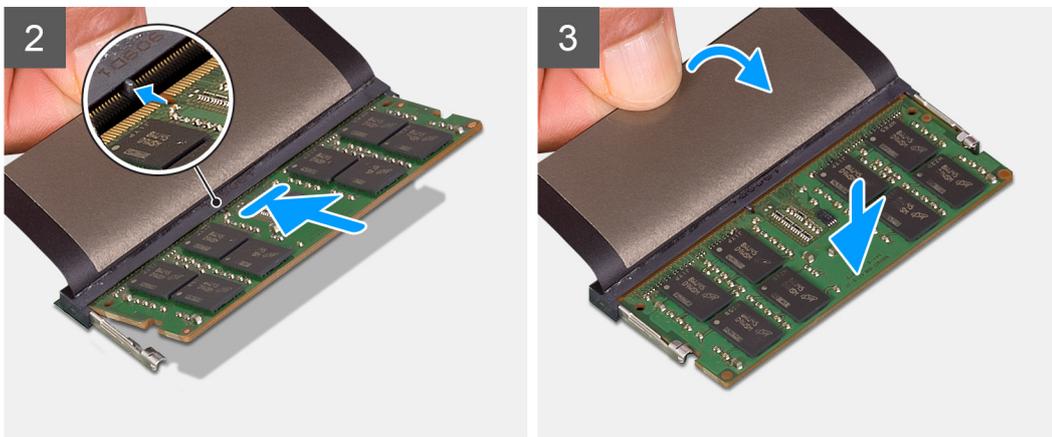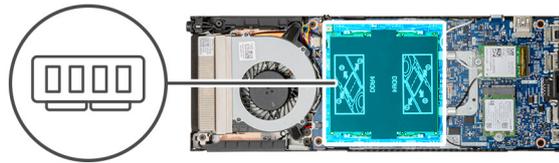

Steps

1. Lift the absorber above the memory-module slot.
2. Align the notch on the memory module with the tab on the memory-module slot.
3. Slide the memory module firmly into the slot at an angle.
4. Press the memory module down until it clicks into place.

(i) NOTE: If you do not hear the click, remove the memory module and reinstall it.

5. Lower the absorber above the memory module.

Next steps

1. Install the [cover](#).
2. Follow the procedure in [After working on your device](#).

WLAN card

Removing the WLAN card

Prerequisites



1. Follow the procedure in [Before working inside your device](#).
2. Remove the [cover](#).

About this task

The figure indicates the location of the WLAN card and provides a visual representation of the removal procedure.



1x
M2x3.5

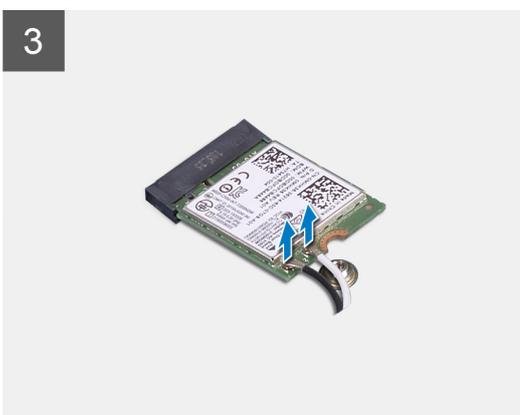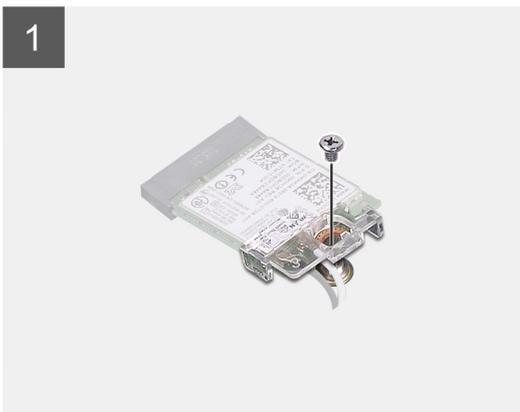

Steps

1. Remove the (M2x3.5) screw that secures the WLAN bracket to the system board.
2. Slide and lift the WLAN bracket.

3. Disconnect the WLAN antenna cables from the WLAN card.
4. Slide and remove the WLAN card from the WLAN connector on the system board.

Installing the WLAN card

Prerequisites


If you are replacing a component, remove the existing component before performing the installation procedure.

About this task

The figure indicates the location of the WLAN card and provides a visual representation of the installation procedure.



1x
M2x3.5

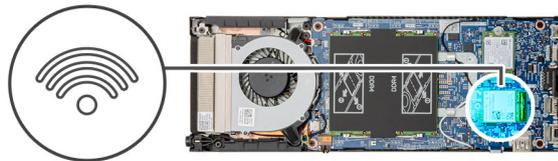

Steps

1. Connect the WLAN antenna cables to the WLAN card.
 - NOTE:** Follow the indication on the WLAN card for the correct location of the antenna cables.
2. Align and place the WLAN card bracket to secure the WLAN antenna cables to the WLAN card.
3. Align the notch on the WLAN card with the WLAN connector and insert the WLAN card at an angle into the WLAN card slot.
4. Replace the (M2x3.5) screw to secure the WLAN card to the system board.

Next steps

1. Install the [cover](#).
2. Follow the procedure in [After working on your device](#).

Solid state drive

Removing the solid-state drive

Prerequisites


1. Follow the procedure in [Before working inside your device](#).
2. Remove the [cover](#).

About this task

The figure indicates the location of the M.2 2230 solid-state drive and provides a visual representation of the removal procedure.



1x
M2x3.5

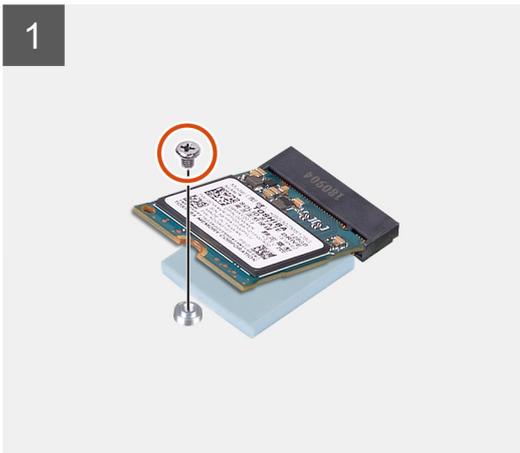

Steps

1. Remove the (M2x3.5) screw that secures the solid-state module to the system board.
2. Slide the solid-state module out from the M.2 slot.
3. Peel the SSD thermal pad from the system board.

Installing the solid-state drive

Prerequisites





If you are replacing a component, remove the existing component before performing the installation procedure.

About this task

The figure indicates the location of the M.2 2230 solid-state drive and provides a visual representation of the installation procedure.



1x
M2x3.5

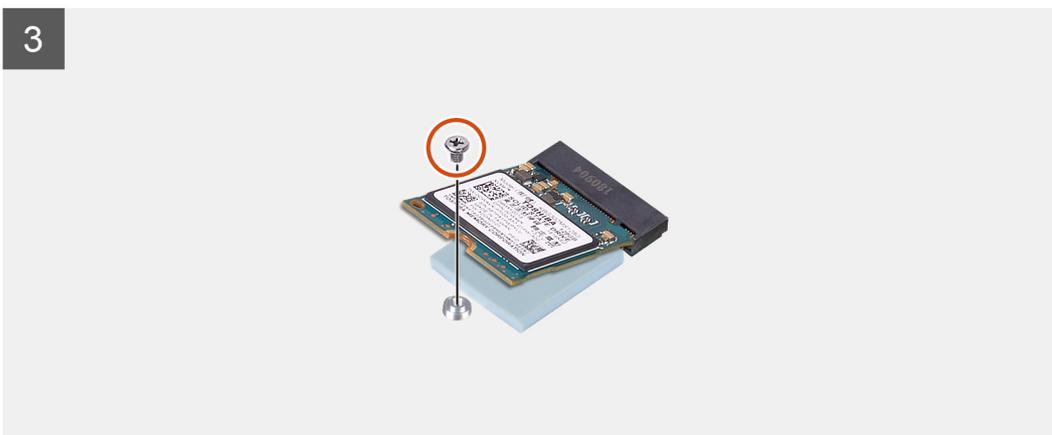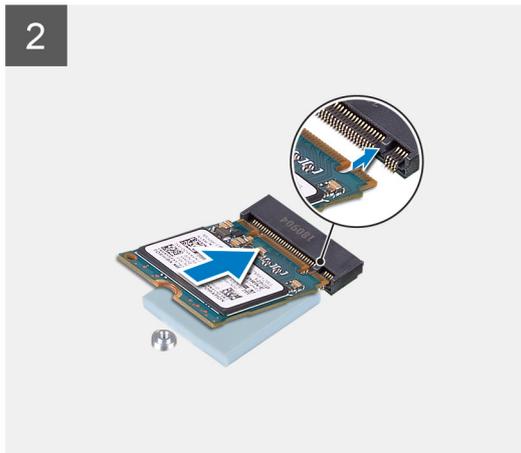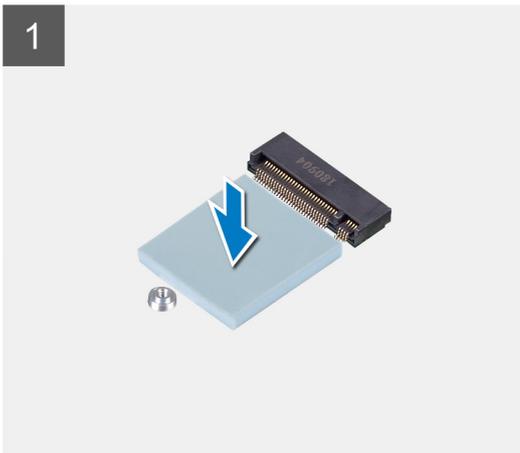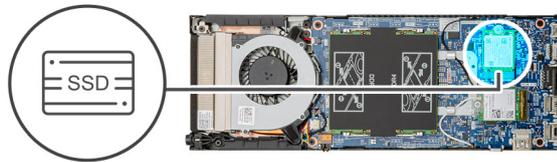

Steps

1. Align and adhere the SSD thermal pad in the mark on the system board.
(i) NOTE: Check the adhesive direction before adhering it to the system board.
2. Align the notch on the solid-state drive with the connector on the system board and slide the solid-state drive at an angle into the slot.

3. Replace the (M2x3.5) screw to secure the solid-state drive module to the system board.

Next steps

1. Install the [cover](#).
2. Follow the procedure in [After working on your device](#).

System fan



Removing the system fan

Prerequisites

1. Follow the procedure in [Before working inside your device](#).
2. Remove the [cover](#).

About this task

The figure indicates the location of the system fan and provides a visual representation of the removal procedure.

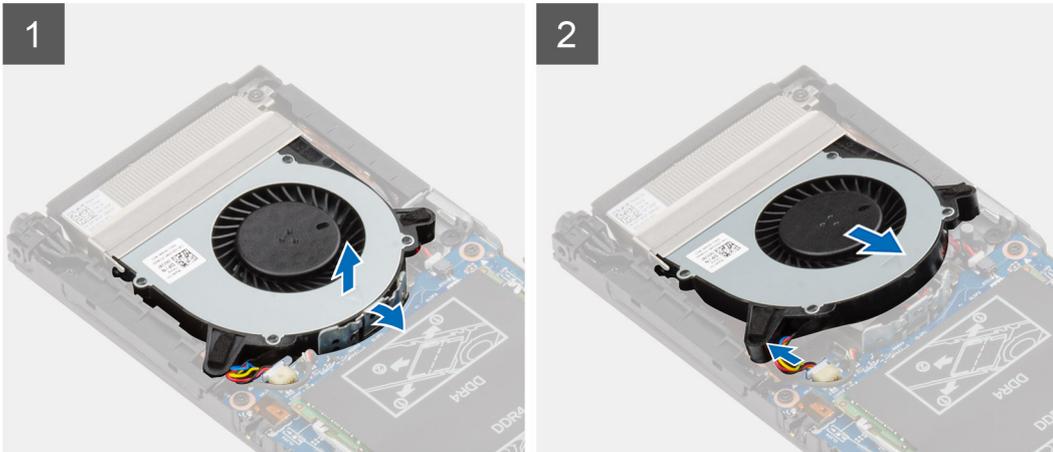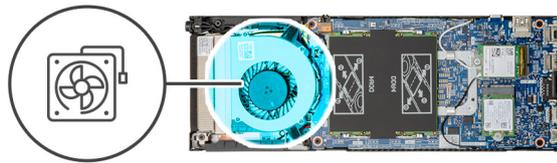

Steps

1. Release the system fan from the retention hook on the fan tray.
2. Disconnect the system fan cable from the connector on the system board.
3. Slide the system fan out from the guiding rails on the heat-sink bracket.



Installing the system fan

Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

About this task

The figure indicates the location of the system fan and provides a visual representation of the installation procedure.

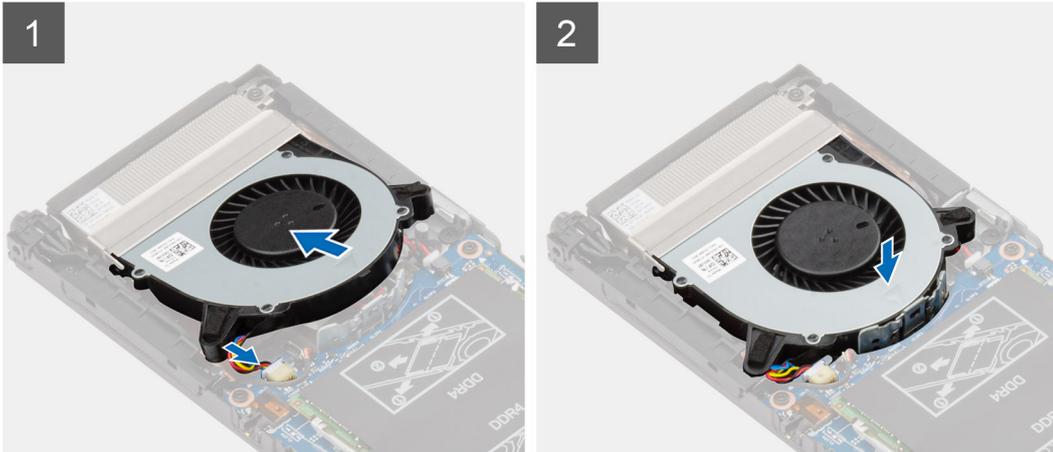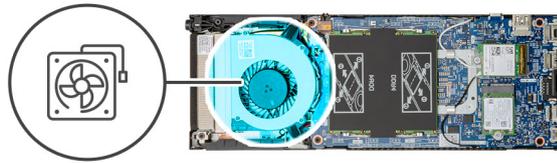

Steps

1. Connect the system fan cable to the connector on the system board.
2. Align the tabs on the system fan with the guiding rails on the heat-sink bracket.
3. Place the system fan into the fan tray until it clicks into place.

Next steps

1. Install the [cover](#).
2. Follow the procedure in [After working on your device](#).

Power button

Removing the power button

Prerequisites


1. Follow the procedure in [Before working inside your device](#).
2. Remove the [cover](#).
3. Remove the [system fan](#).

About this task

The figure indicates the location of the power button and provides a visual representation of the removal procedure.



1x
M2x3

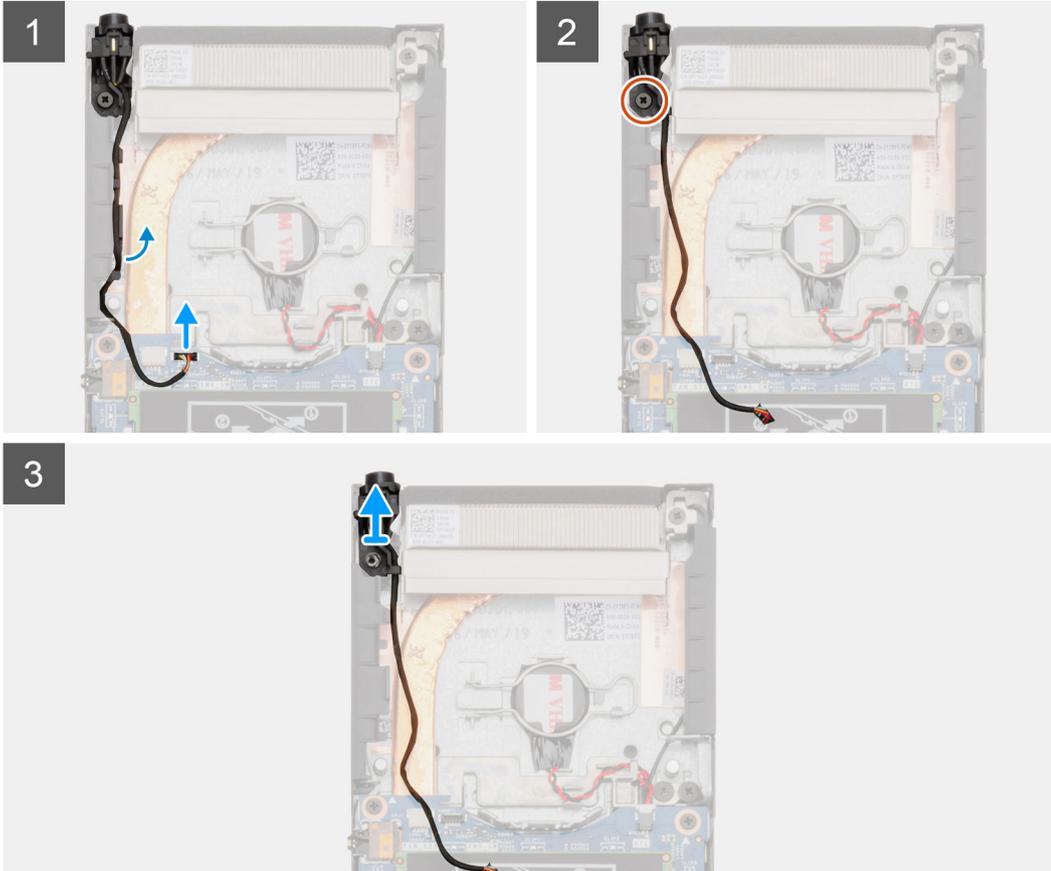

Steps

1. Disconnect the power-button cable from the connector on the system board.
2. Unroute the power-button cable from the routing guide.

NOTE: Observe the routing of the power-button cable inside the chassis as you remove them. Route the cable properly when you replace the component to prevent the cable from being pinched or crimped.

3. Remove the (M2x3) screw that secures the power button to the chassis.
4. Lift the power button out of the chassis.

Installing the power button

Prerequisites


If you are replacing a component, remove the existing component before performing the installation procedure.

About this task

The figure indicates the location of the power button and provides a visual representation of the installation procedure.



1x
M2x3

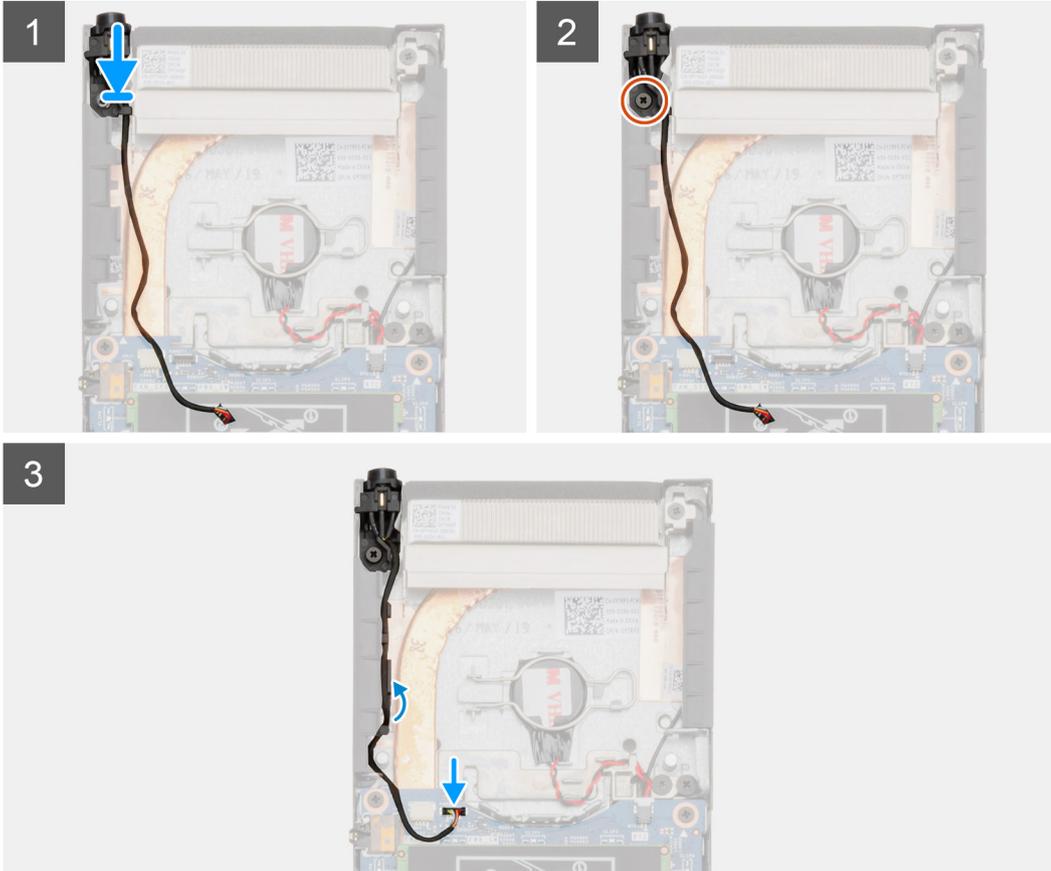

Steps

1. Place the power button into the slot on the chassis.
2. Replace the (M2x3) screw to secure the power button to the chassis.
3. Route the power button cable through the routing guides on the chassis.
4. Connect the power-button cable to the connector on the system board.

Next steps

1. Install the [system fan](#).
2. Install the [cover](#).
3. Follow the procedure in [After working on your device](#).

Coin-cell battery


Removing the coin-cell battery

Prerequisites

1. Follow the procedure in [Before working inside your device](#).
2. Remove the [cover](#).
3. Remove the [system fan](#).

About this task

The figure indicates the location of the coin-cell battery and provides a visual representation of the removal procedure.

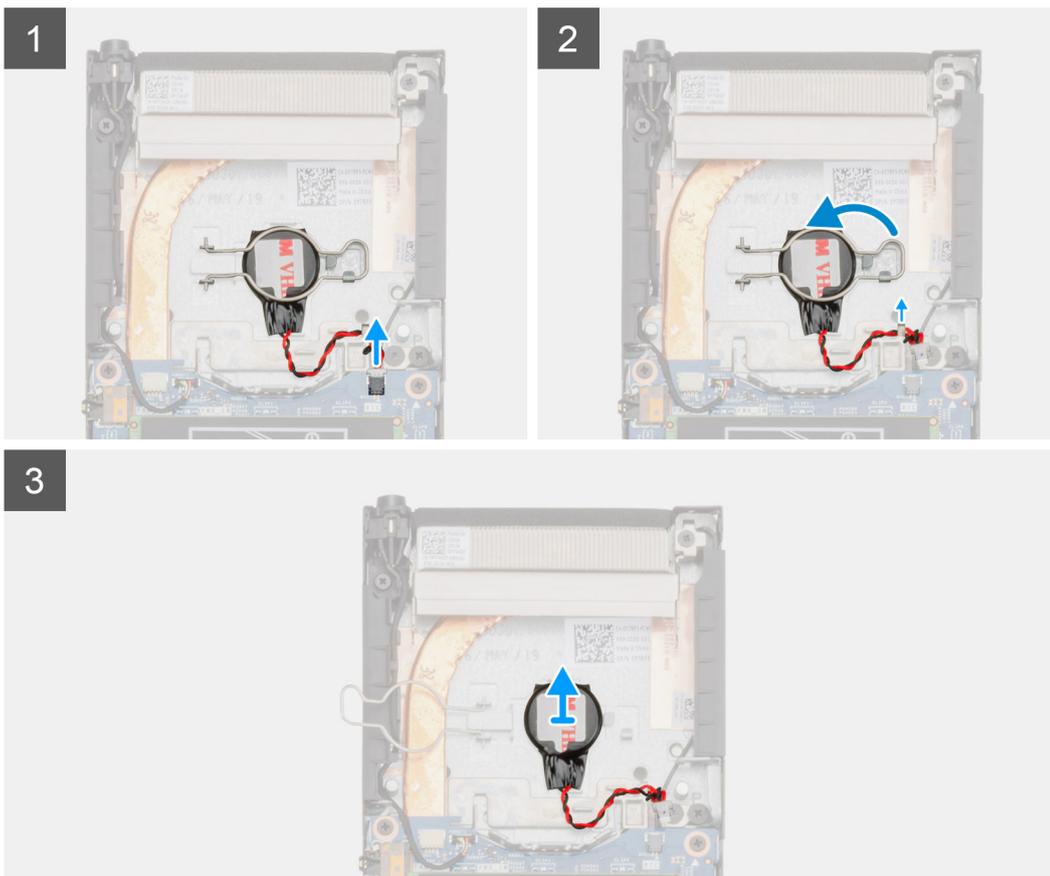

Steps

1. Disconnect the coin-cell battery cable from the connector on the system board.
2. Unroute the coin-cell battery cable from the routing guide.

NOTE: Observe the routing of the coin-cell battery cable inside the chassis as you remove them. Route the cable properly when you replace the component to prevent the cable from being pinched or crimped.

3. Release the coin-cell retention clip from the securing hook and turn the clip to the other side.
4. Lift the coin-cell battery.


Installing the coin-cell battery

Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

About this task

The figure indicates the location of the coin-cell battery and provides a visual representation of the installation procedure.

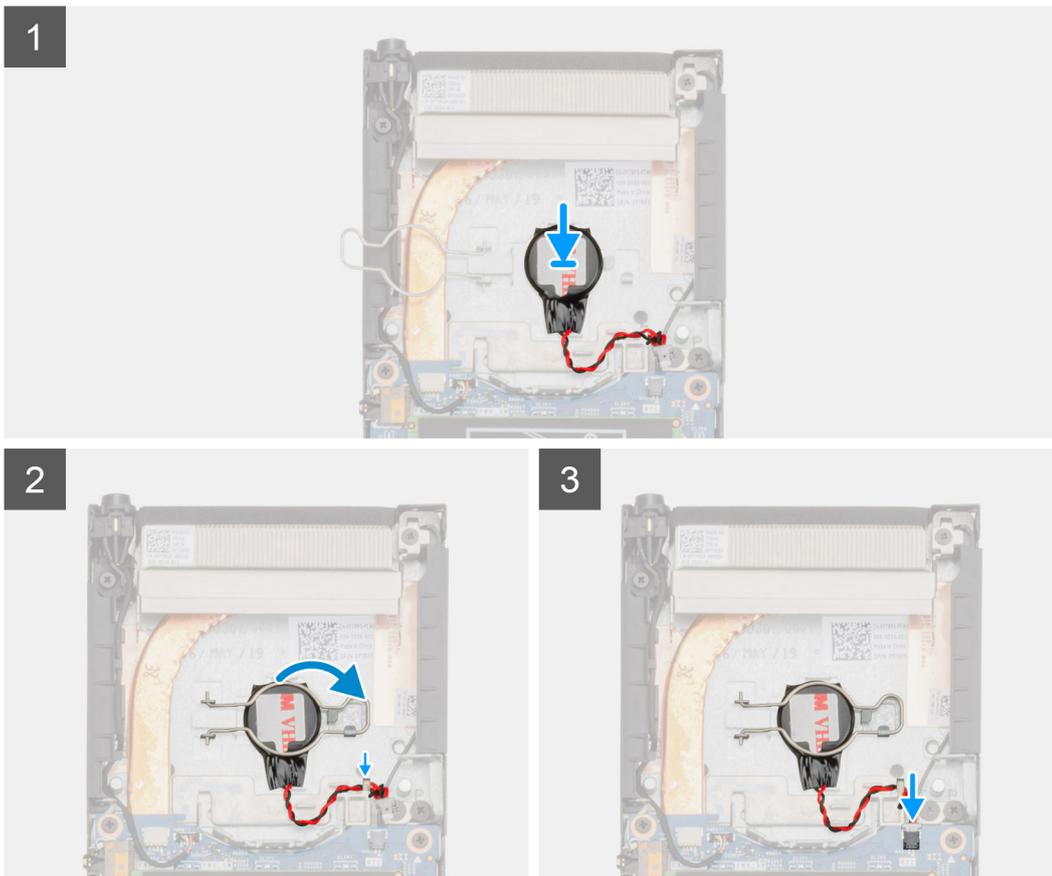

Steps

1. Place the coin-cell battery in the slot on the chassis.
2. Close the coin-cell retention clip to secure the coin-cell battery.
3. Secure the coin-cell retention clip to the hook.
4. Route the coin-cell battery cable through the routing guide.
5. Connect the coin-cell battery cable to the connector on the system board.

Next steps

1. Install the [system fan](#).
2. Install the [cover](#).
3. Follow the procedure in [After working on your device](#).

System board




Removing the system board

Prerequisites

1. Follow the procedure in [Before working inside your device](#).
2. Remove the [hard-drive assembly](#).
3. Remove the [cover](#).
4. Remove the [system fan](#).
5. Remove the [WLAN card](#).
6. Remove the [solid-state drive](#).
7. Remove the [memory](#).




About this task

The figure indicates the location of the system board and provides a visual representation of the removal procedure.

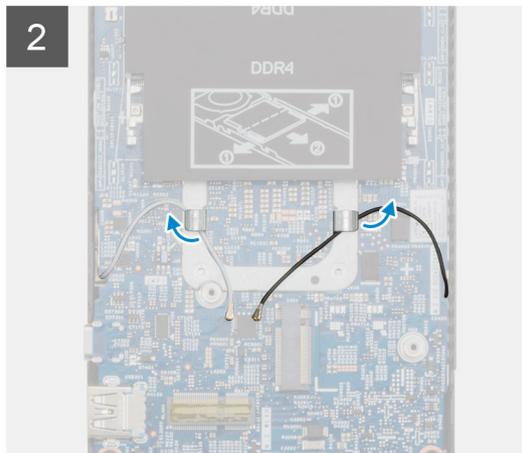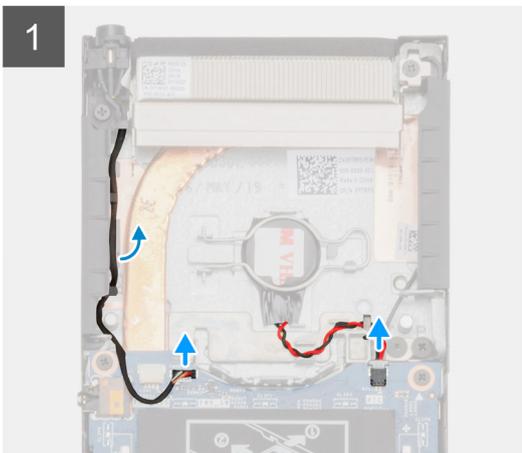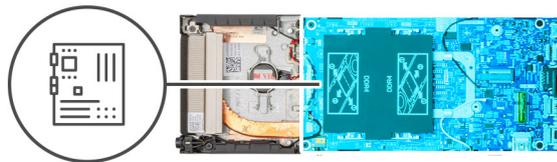



4x
M2x3

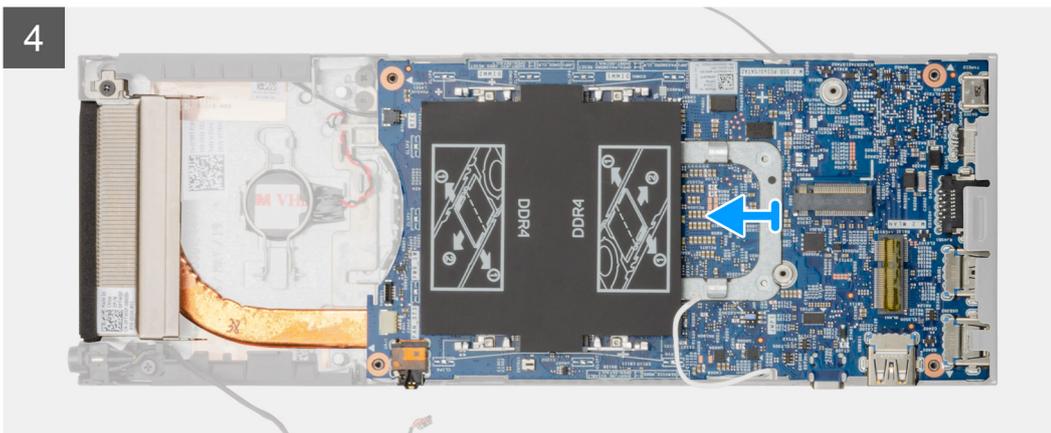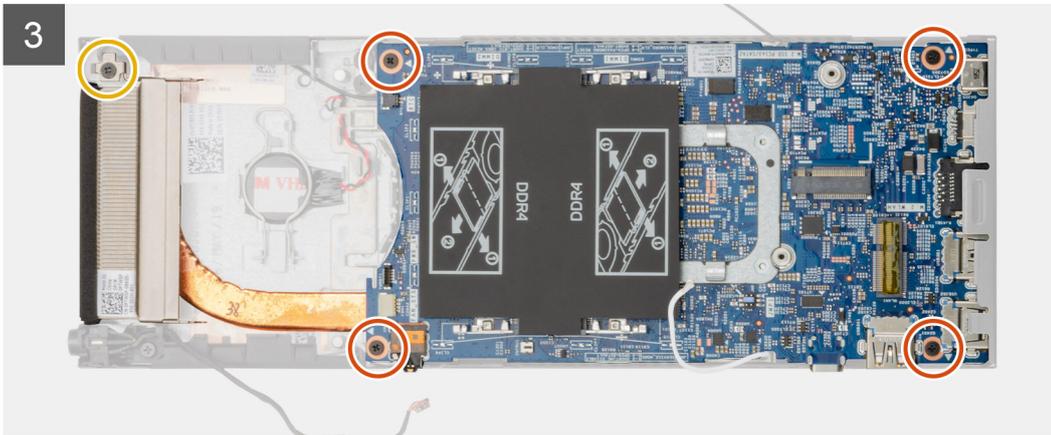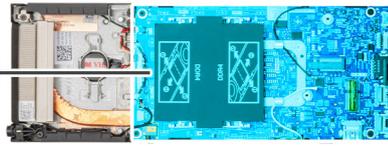

Steps

1. Disconnect the power-button cable and the coin-cell battery cable from the connectors on the system board.
2. Unroute the power-button cable and the coin-cell battery cable from the routing guides.
3. Unroute the WLAN antenna cables from the routing guides.

i NOTE: Observe the routing of the WLAN antenna cables inside the chassis as you remove them. Route these cables properly when you replace the component to prevent the cables from being pinched or crimped.

4. Loosen the M2x3 captive screw and remove the four (M2x3) screws that secure the system board to the chassis.
5. Slightly lift and slide the system board out of the chassis.

Installing the system board

Prerequisites


If you are replacing a component, remove the existing component before performing the installation procedure.

About this task


The figure indicates the location of the system board and provides a visual representation of the installation procedure.




4x
M2x3



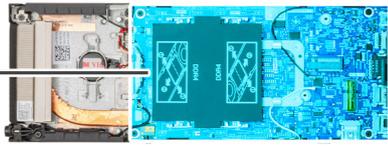


1

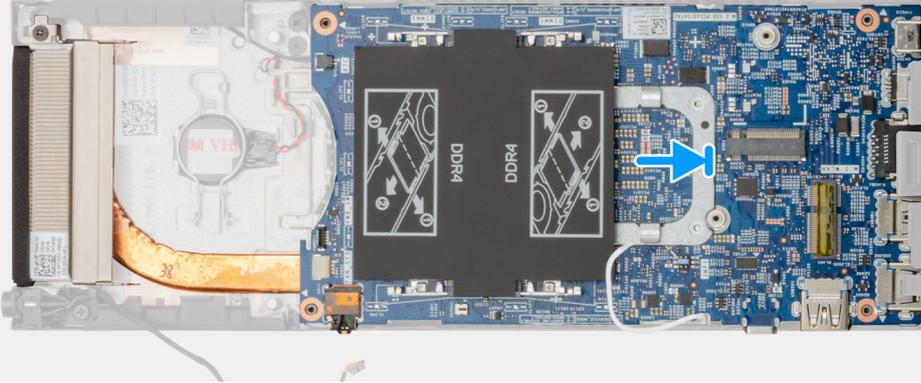

2

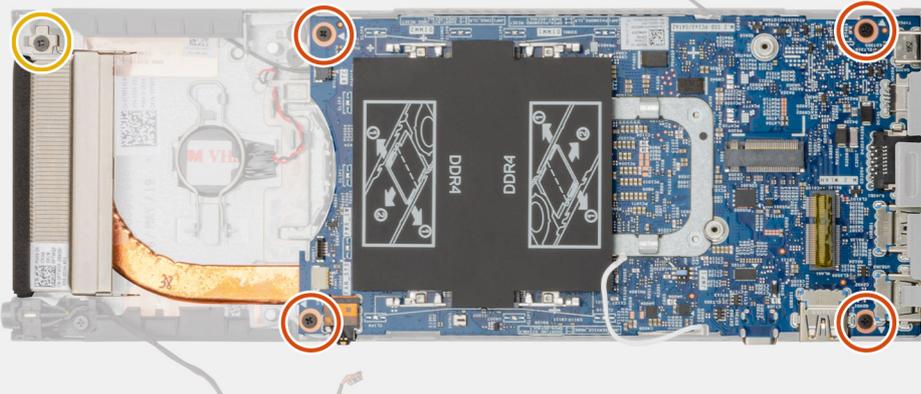

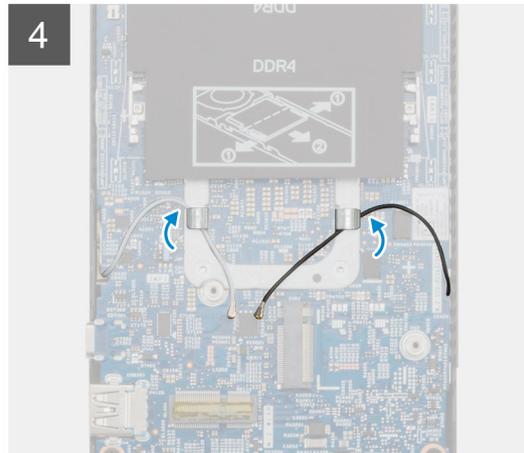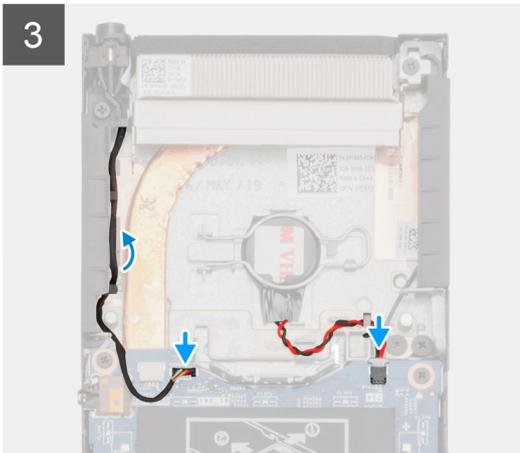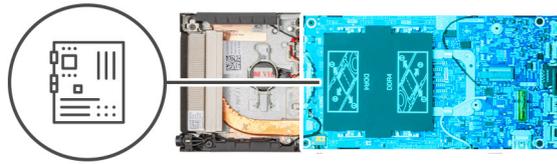

Steps

1. Align the connectors on the system board with the connector slots on the chassis.
2. Gently slide the system board into the chassis.
3. Tighten the M2x3 captive screw and replace the four (M2x3) screws to secure the system board to the chassis.
4. Route the power-button cable and the coin-cell battery cable through the routing guides.
5. Connect the power-button cable and the coin-cell battery cable to the connectors on the system board.
6. Route the WLAN antenna cables through the routing guides.

NOTE: The antennas should be aligned with the notches in the system board and the cable routing should not be over the system board QR code.

Next steps

1. Install the [solid-state drive](#).
2. Install the [memory](#).
3. Install the [WLAN card](#).
4. Install the [system fan](#).
5. Install the [cover](#).
6. Install the [hard-drive assembly](#).
7. Follow the procedure in [After working on your device](#).

Heat-sink

Removing the heat-sink




Prerequisites

1. Follow the procedure in [Before working inside your device](#).
2. Remove the [hard-drive assembly](#).
3. Remove the [cover](#).
4. Remove the [system fan](#).
5. Remove the [WLAN card](#).

6. Remove the [solid-state drive](#).
7. Remove the [memory](#).
8. Remove the [system board](#).

About this task

The figure indicates the location of the heatsink assembly and provides a visual representation of the removal procedure.

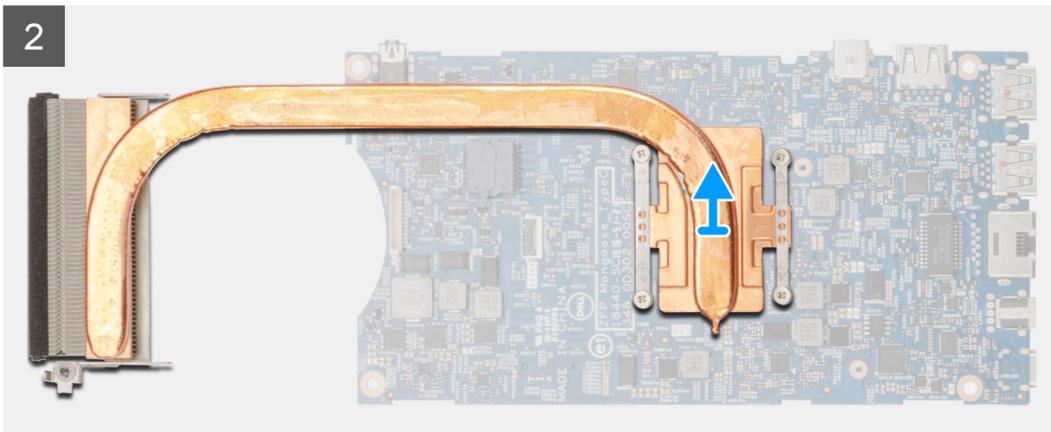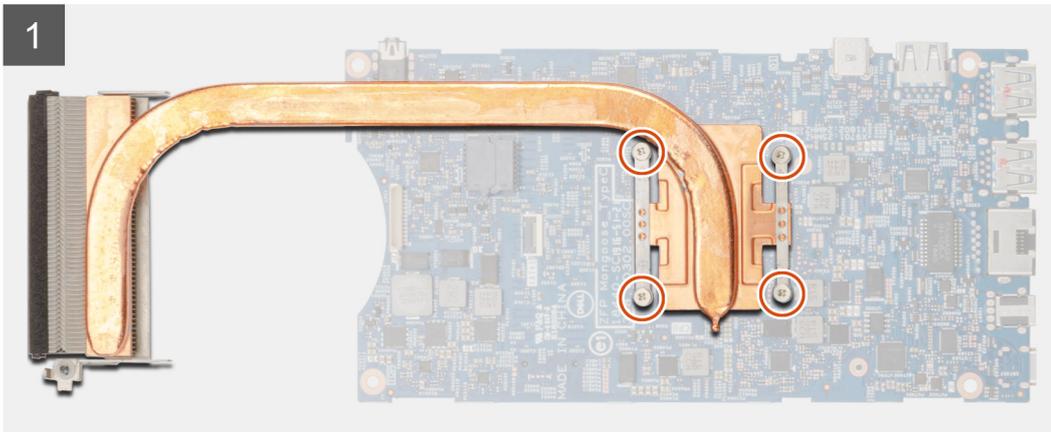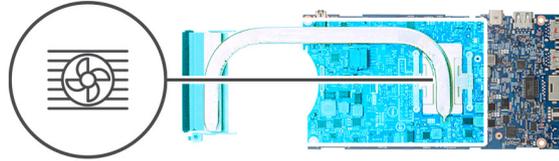

Steps

1. Loosen the four captive screws that secure the heat sink to the system board.
i **NOTE:** Remove the screws in the order of the callout numbers [1, 2, 3, 4] as indicated on the heat sink.
2. Lift the heat sink away from the system board.



Installing the heat-sink

Prerequisites

If you are replacing a component, remove the existing component before performing the installation procedure.

About this task

The figure indicates the location of the heat-sink and provides a visual representation of the installation procedure.

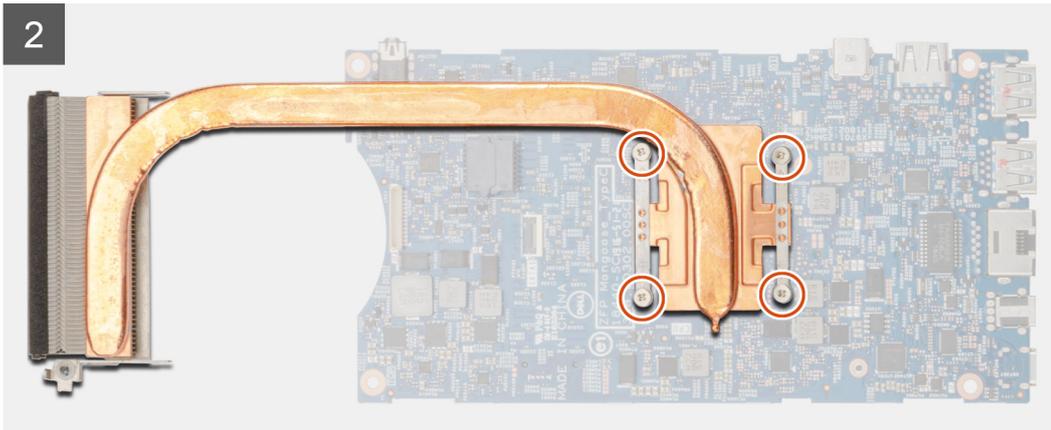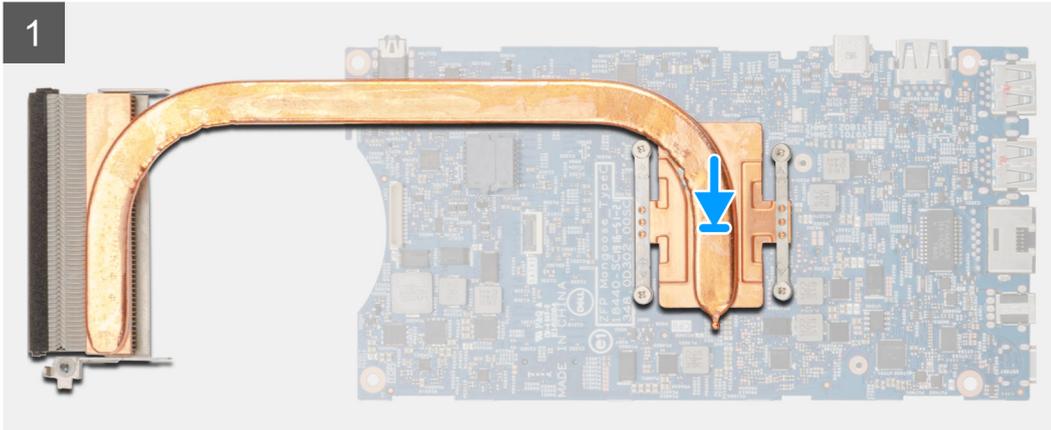

Steps

1. Align the screws on the heat-sink with the screw holes on the system board.
2. Tighten the four captive screws to secure the heat-sink to the system board.

NOTE: Replace the screws in the order indicated on the heat-sink.

Next steps

1. Install the [system board](#).
2. Install the [solid-state drive](#).
3. Install the [memory](#).
4. Install the [WLAN card](#).
5. Install the [system fan](#).
6. Install the [cover](#).
7. Install the [hard-drive assembly](#).
8. Follow the procedure in [After working on your device](#).


Replacing the chassis

Prerequisites

1. Follow the procedure in [Before working inside your device](#).
2. Remove the [hard-drive assembly](#).
3. Remove the [cover](#).
4. Remove the [system fan](#).
5. Remove the [WLAN card](#).
6. Remove the [solid-state drive](#).
7. Remove the [power button](#).
8. Remove the [memory](#).
9. Remove the [system board](#).
10. Remove the [coin cell battery](#).

About this task

After removing the above components, we are left with the chassis.

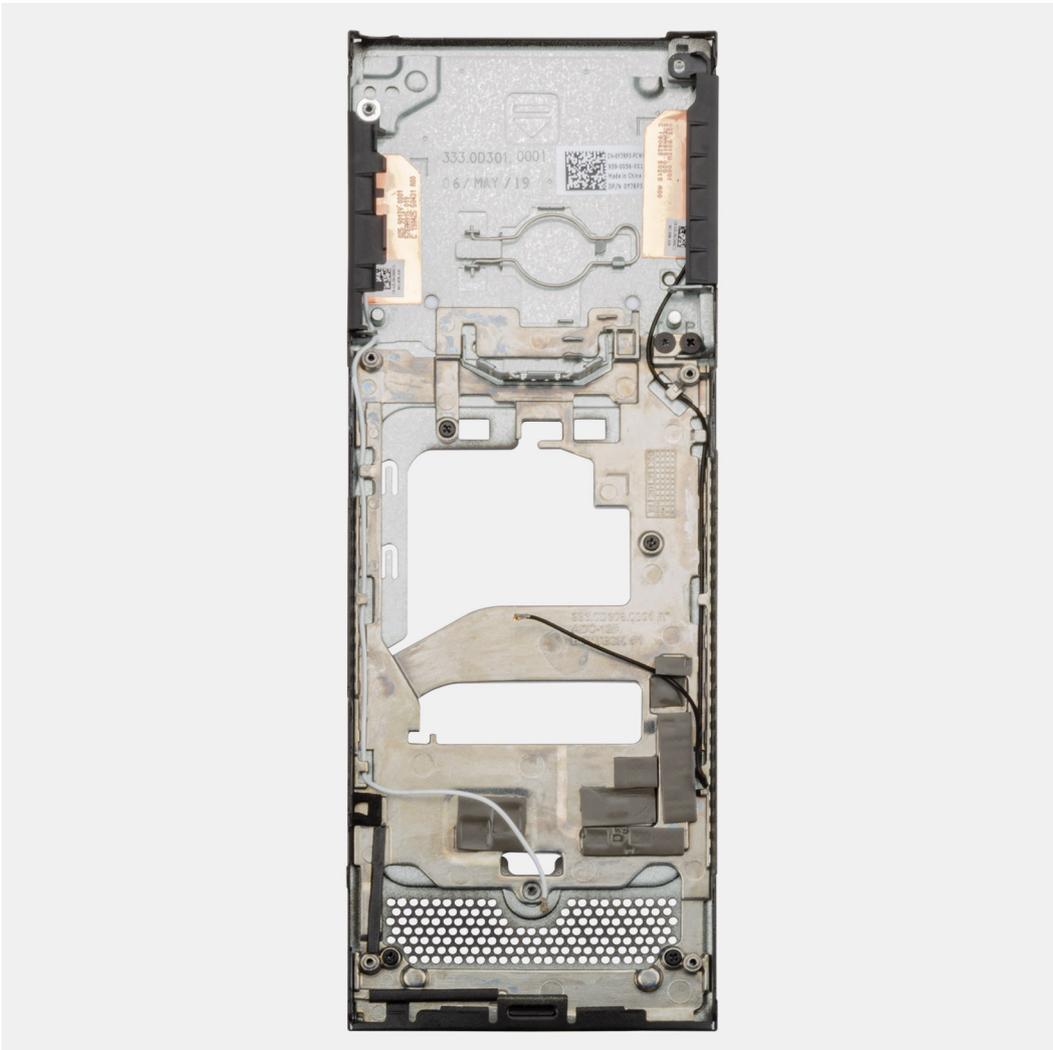

System setup

CAUTION: Unless you are an expert computer user, do not change the settings in the BIOS Setup program. Certain changes can make your computer work incorrectly.

NOTE: Before you change BIOS Setup program, it is recommended that you write down the BIOS Setup program screen information for future reference.

Use the BIOS Setup program for the following purposes:

- Get information about the hardware installed in your computer, such as the amount of RAM and the size of the hard drive.
- Change the system configuration information.
- Set or change a user-selectable option, such as the user password, type of hard drive installed, and enabling or disabling base devices.

Topics:

- [Boot menu](#)
- [Navigation keys](#)
- [Boot Sequence](#)
- [System setup options](#)
- [Updating the BIOS in Windows](#)
- [System and setup password](#)

Boot menu

Press <F12> when the Dell logo appears to initiate a one-time boot menu with a list of the valid boot devices for the system. Diagnostics and BIOS Setup options are also included in this menu. The devices listed on the boot menu depend on the bootable devices in the system. This menu is useful when you are attempting to boot to a particular device or to bring up the diagnostics for the system. Using the boot menu does not make any changes to the boot order stored in the BIOS.

The options are:

- UEFI Boot:
 - Windows Boot Manager
- Other Options:
 - BIOS Setup
 - BIOS Flash Update
 - Diagnostics
 - Change Boot Mode Settings

Navigation keys

NOTE: For most of the System Setup options, changes that you make are recorded but do not take effect until you restart the system.

Keys	Navigation
Up arrow	Moves to the previous field.
Down arrow	Moves to the next field.
Enter	Selects a value in the selected field (if applicable) or follow the link in the field.
Spacebar	Expands or collapses a drop-down list, if applicable.
Tab	Moves to the next focus area.

Keys

Esc

Navigation

Moves to the previous page until you view the main screen. Pressing Esc in the main screen displays a message that prompts you to save any unsaved changes and restarts the system.

Boot Sequence

Boot sequence enables you to bypass the System Setup–defined boot device order and boot directly to a specific device (for example: optical drive or hard drive). During the Power-on Self-Test (POST), when the Dell logo appears, you can:

- Access System Setup by pressing F2 key
- Bring up the one-time boot menu by pressing F12 key.

The one-time boot menu displays the devices that you can boot from including the diagnostic option. The boot menu options are:

- Removable Drive (if available)
- STXXXX Drive

NOTE: XXXX denotes the SATA drive number.

- Optical Drive (if available)
- SATA Hard Drive (if available)
- Diagnostics

NOTE: Choosing Diagnostics, displays the ePSA diagnostics screen.

The boot sequence screen also displays the option to access the System Setup screen.

System setup options

NOTE: Depending on the tabletcomputerlaptop and its installed devices, the items listed in this section may or may not appear.

General options

Table 2. General

Option	Description
System Information	<p>Displays the following information:</p> <ul style="list-style-type: none">• System Information: Displays BIOS Version, Service Tag, Asset Tag, Ownership Tag, Manufacture Date, Ownership Date, and the Express Service Code.• Memory Information: Displays Memory Installed, Memory Available, Memory Speed, Memory Channel Mode, Memory Technology, DIMM A size, and DIMM B size• PCI Information: Displays Slot1_M.2, Slot2_M.2• Processor Information: Displays Processor Type, Core Count, Processor ID, Current Clock Speed, Minimum Clock Speed, Maximum Clock Speed, Processor L2 Cache, Processor L3 Cache, HT Capable, and 64-Bit Technology.• Device Information: Displays SATA-1, SATA-2, M.2 PCIe SSD-0, LOM MAC Address, Video Controller, Audio Controller, Wi-Fi Device, and Bluetooth Device.
Boot Sequence	<p>Allows you to specify the order in which the computer attempts to find an operating system to boot from the devices specified in this list.</p> <ul style="list-style-type: none">• UEFI: BC501A NVMe SK hynix 128 GB• Onboard NIC (IPV4)• Onboard NIC (IPV6)
UEFI Boot Path Security	<p>This option controls whether the system will prompt the user to enter the Admin password when booting a UEFI boot path from the F12 Boot Menu.</p> <ul style="list-style-type: none">• Always, Except Internal HDD—Default• Always, Except Internal HDD&PXE

Option	Description
	<ul style="list-style-type: none"> Always Never
Date/Time	Allows you to set the date and time settings. Changes to the system date and time take effect immediately.

System information

Table 3. System Configuration

Option	Description
Integrated NIC	<p>Allows you to configure the on-board LAN controller. The option Enable UEFI Network Stack is selected by default.</p> <ul style="list-style-type: none"> Disabled = The internal LAN is off and not visible to the operating system. Enabled = The internal LAN is enabled. Enabled w/PXE = The internal LAN is enabled (with PXE boot) (selected by default)
SATA Operation	<p>Allows you to configure the operating mode of the integrated hard drive controller.</p> <ul style="list-style-type: none"> Disabled = The SATA controllers are hidden AHCI = SATA is configured for AHCI mode RAID ON = SATA is configured to support RAID mode (selected by default)
Drives	<p>Allows you to enable or disable the various drives on-board:</p> <ul style="list-style-type: none"> SATA-1 (enabled by default) SATA-2 (enabled by default) M.2 PCIe SSD-0 (enabled by default)
Smart Reporting	<p>This field controls whether hard drive errors for integrated drives are reported during system startup. The Enable Smart Reporting option is disabled by default.</p>
USB Configuration	<p>Allows you to enable or disable the integrated USB controller for:</p> <ul style="list-style-type: none"> Enable USB Boot Support Enable Side USB Port Enable Rear USB Port <p>All the options are enabled by default.</p>
Rear USB Configuration	<p>Allows you to enable or disable Rear USB ports.</p> <ul style="list-style-type: none"> Rear Port 1 (Left) Rear Port 2 (Right) Rear Type-C Port
Side USB Configuration	<p>Allows you to enable or disable Side USB ports.</p> <ul style="list-style-type: none"> Side Port 1 w/PowerShare (Bottom) Side Type-C Port
USB PowerShare	<p>This option configures the USB PowerShare feature behavior.</p> <ul style="list-style-type: none"> Enable USB PowerShare - disabled by default. <p>This feature is intended to enable users to power or charge external devices, such as phones and portable music players, using the stored system battery power through the USB PowerShare port on the notebook, while the notebook is in a sleep state.</p>
Audio	<p>Allows you to enable or disable the integrated audio controller. The option Enable Audio is selected by default.</p> <p>Both the options are selected by default.</p>

Video

i NOTE: The video setting is visible only when a video card is installed into the system.

Table 4. Video option

Options	Descriptions
Primary Display	<p>This field determines which video controller becomes the primary display when multiple controllers are available in the system. If you select a device other than what you are currently using, you have to reconnect your video cable to your selected device.</p> <ul style="list-style-type: none"> • Auto • Intel HD Graphics

Security

Table 5. Security

Option	Description
Admin Password	Allows you to set, change, and delete the admin password.
System Password	Allows you to set, change, and delete the system password.
Internal HDD-1 Password	This option lets you set, change, or delete the password on the internal hard disk drive (HDD) of the system.
Strong Password	This option lets you enable or disable strong passwords for the system.
Password Configuration	Allows you to control the minimum and maximum number of characters that are allowed for an administrative password and the system password. The range of characters is 4–32.
Password Bypass	<p>This option lets you bypass the System (Boot) Password and the internal hard drive password prompts during a system restart.</p> <ul style="list-style-type: none"> • Disabled—Always prompt for the system and internal hard drive password when they are set. This option is enabled by default. • Reboot Bypass—Bypass the password prompts on Restarts (warm boots). <p>i NOTE: The system will always prompt for the system and internal hard drive passwords when powered on from the off state (a cold boot). Also, the system will always prompt for passwords on any module bay HDDs that may be present.</p>
Password Change	<p>This option lets you determine whether changes to the System and Hard Disk passwords are permitted when an administrator password is set.</p> <p>Allow Non-Admin Password Changes - This option is enabled by default.</p>
UEFI Capsule Firmware Updates	This option controls whether this system enables BIOS updates via UEFI capsule update packages. This option is selected by default. Disabling this option blocks BIOS updates from services such as Microsoft Windows Update and Linux Vendor Firmware Service (LVFS).
TPM 2.0 Security	<p>Allows you to control whether the Trusted Platform Module (TPM) is visible to the operating system.</p> <ul style="list-style-type: none"> • TPM On (default) • Clear • PPI Bypass for Enable Commands • PPI Bypass for Disable Commands • PPI Bypass for Clear Commands • Attestation Enable (default) • Key Storage Enable (default) • SHA-256 (default) <p>Choose any one option:</p>

Option	Description
	<ul style="list-style-type: none"> Disabled Enabled (default)
Absolute	<p>This field lets you Enable, Disable, or Permanently Disable the BIOS module interface of the optional Absolute Persistence Module service from Absolute Software.</p> <ul style="list-style-type: none"> Enabled - This option is selected by default. Disabled Permanently Disabled
Chassis Intrusion	<p>This field controls the chassis intrusion feature.</p> <ul style="list-style-type: none"> Disabled (default) Enabled On-Silent
Admin Setup Lockout	<p>Allows you to prevent users from entering Setup when Admin password is set. This option is not set by default.</p>
Master Password Lockout	<p>Allows you to disable master password support. Hard Disk passwords need to be cleared before the settings can be changed. This option is not set by default.</p>
SMM Security Mitigation	<p>Allows you to enable or disable additional UEFI SMM Security Mitigation protections. This option is not set by default.</p>

Secure boot

Table 6. Secure Boot

Option	Description
Secure Boot Enable	<p>Allows you to enable or disable Secure Boot feature</p> <ul style="list-style-type: none"> Secure Boot Enable <p>Option is not selected.</p>
Secure Boot Mode	<p>Allows you to modify the behavior of Secure Boot to allow evaluation or enforcement of UEFI driver signatures.</p> <ul style="list-style-type: none"> Deployed Mode (default) Audit Mode
Expert key Management	<p>Allows you to manipulate the security key databases only if the system is in Custom Mode. The Enable Custom Mode option is disabled by default. The options are:</p> <ul style="list-style-type: none"> PK (default) KEK db dbx <p>If you enable the Custom Mode, the relevant options for PK, KEK, db, and dbx appear. The options are:</p> <ul style="list-style-type: none"> Save to File- Saves the key to a user-selected file Replace from File- Replaces the current key with a key from a user-selected file Append from File- Adds a key to the current database from a user-selected file Delete- Deletes the selected key Reset All Keys- Resets to default setting Delete All Keys- Deletes all the keys <p>NOTE: If you disable the Custom Mode, all the changes made will be erased and the keys will restore to default settings.</p>

Intel Software Guard Extensions

Table 7. Intel Software Guard Extensions

Option	Description
Intel SGX Enable	<p>This field specifies you to provide a secured environment for running code/storing sensitive information in the context of the main OS.</p> <p>Click one of the following options:</p> <ul style="list-style-type: none">• Disabled• Enabled• Software controlled—Default
Enclave Memory Size	<p>This option sets SGX Enclave Reserve Memory Size</p> <p>Click one of the following options:</p> <ul style="list-style-type: none">• 32 MB• 64 MB• 128 MB—Default

Performance

Table 8. Performance

Option	Description
Multi Core Support	<p>This field specifies whether the process has one or all cores enabled. The performance of some applications improves with the additional cores.</p> <ul style="list-style-type: none">• All—Default• 1• 2• 3
Intel SpeedStep	<p>Allows you to enable or disable the Intel SpeedStep mode of processor.</p> <ul style="list-style-type: none">• Enable Intel SpeedStep. <p>This option is set by default.</p>
C-States Control	<p>Allows you to enable or disable the additional processor sleep states.</p> <ul style="list-style-type: none">• C states <p>This option is set by default.</p>
Intel TurboBoost	<p>Allows you to enable or disable the Intel TurboBoost mode of the processor.</p> <ul style="list-style-type: none">• Enable Intel TurboBoost. <p>This option is set by default.</p>
HyperThread Control	<p>Allows you to enable or disable the HyperThreading in the processor.</p> <ul style="list-style-type: none">• Disabled• Enabled—Default

Power management

Table 9. Power management

Options	Descriptions
AC Behavior	<p>This field specifies how the system will behave when AC power is restored after a AC power loss.</p> <ul style="list-style-type: none">• Power Off (Default)• Power On• Last Power State
Enable Intel Speed Shift Technology	<p>This option is used to enable/disable Intel Speed Shift Technology support.</p> <ul style="list-style-type: none">• Enable Intel Speed Shift Technology (Default).
Auto On Time	<p>Allows you to set the time at which the computer must turn on automatically. The options are:</p> <ul style="list-style-type: none">• Disabled (Default)• Every Day• Weekdays• Select Days
Deep Sleep Controls	<p>This field determines how aggressive the system is at conserving power while Shut down (S5) or in Hibernate (S4 mode). When this option is enabled, more power is conserved.</p> <ul style="list-style-type: none">• Disabled (Default)• Enabled in S5 only• Enabled in S4 and S5
USB Wake Support	<p>Allows you to enable USB devices to wake the system from Standby.</p> <p>NOTE: This feature is only functional when the AC power adapter is connected. If the AC power adapter is removed during Standby, the system setup removes power from all the USB ports to conserve battery power.</p> <ul style="list-style-type: none">• Enable USB Wake Support
Wake on LAN/WLAN	<p>Allows you to enable or disable the feature that powers on the computer from the Off state when triggered by a LAN signal.</p> <ul style="list-style-type: none">• Disabled• LAN Only• WLAN Only• LAN or WLAN• LAN with PXE Boot <p>Default setting: Disabled</p>
Block Sleep	<p>This option lets you block entering to sleep in operating system environment. When enabled system will not go to sleep.</p> <p>Block Sleep - is disabled.</p>

POST behavior

Table 10. POST behavior

Options	Descriptions
Numlock LED	Allows you to enable the Numlock option when the computer boots. Enable Network. This option is enabled by default.
Keyboard errors	This field specifies whether the keyboard related errors are reported. Enable Network Error Detention. This option is enabled by default.
Fastboot	Allows you to speed up the boot process by bypassing some of the compatibility steps. The options are: <ul style="list-style-type: none">MinimalThorough—enabled by defaultAuto
Extend BIOS POST time	Allows you to create an extra preboot delay. The options are: <ul style="list-style-type: none">0 seconds—enabled by default.5 seconds10 seconds
Full Screen Logo	This option displays full screen logo if your image match screen resolution. Enable Full Screen Logo—not enabled
Warnings and Errors	This option cause the boot process to only pause whe warnings or errors are detected, rather than stop, prompt and wait for user input.

Manageability

Table 11. Manageability

Options	Descriptions
Intel AMT Capability	Allows you to provision AMT and MEBx Hotkey function is enabled, during the system boot. <ul style="list-style-type: none">DisabledEnabled - by defaultRestrict MEBx Access
USB Provision	When enabled, Intel AMT can be provisioned using the local provisioning file via a USB storage device. <ul style="list-style-type: none">Enable USB Provision—disabled by default.
MEBX Hotkey	Allows you to specify whether the MEBx Hotkey function should enable, during the system boot. <ul style="list-style-type: none">Enable MEBx hotkey—enabled by default.

Virtualization support

Option	Description
Virtualization	This field specifies whether a virtual Machine Monitor (VMM) can utilize the conditional hardware capabilities provided by Intel Virtualization Technology.

Option	Description
	Enable Intel Virtualization Technology—enabled by default.
VT for Direct I/O	Enables or disables the Virtual Machine Monitor (VMM) from utilizing the additional hardware capabilities provided by Intel® Virtualization technology for direct I/O. Enable VT for Direct I/O - enabled by default.
Trusted Execution	This option specifies whether a Measured Virtual Machine Monitor (MVMM) can utilize the additional hardware capabilities provided by Intel Trusted Execution Technology. The TPM Virtualization Technology, and the Virtualization technology for direct I/O must be enabled to use this feature. Trusted Execution - disabled by default.

Wireless

Table 12. Wireless

Options	Descriptions
Wireless Device Enable	Allows you to enable or disable the internal wireless devices. <ul style="list-style-type: none"> WLAN/WiFi Bluetooth The options are enabled by default.

Maintenance screen

Table 13. Maintenance screen

Options	Descriptions
Service Tag	Displays the Service Tag of your computer.
Asset Tag	Allows you to create a system asset tag if an asset tag is not already set. This option is not set by default.
SERR Message	This field controls the SERR message mechanism. <ul style="list-style-type: none"> Enable SERR Messages—Enabled by default.
BIOS Downgrade	This field controls flashing of the system firmware to previous revisions. <ul style="list-style-type: none"> Enable BIOS Downgrade—Enabled by default.
Data Wipes	This field enables users to securely erase data from all internal storage devices. <ul style="list-style-type: none"> Wipe on Next Boot-Disabled by default.
BIOS Recovery	This field enables you to recover from certain corrupted BIOS conditions from a recover file on the user primary hard drive or an external USB key. <ul style="list-style-type: none"> BIOS Recovery from Hard Drive—Enabled by default <ul style="list-style-type: none"> BIOS Auto-Recovery—Disabled by default

System logs

Table 14. System logs

Options	Descriptions
BIOS Event	Allows you to view and clear the System Setup (BIOS) POST events.

Advanced Configuration

Table 15. Advanced Configuration

Options	Descriptions
ASPM	Set the ASPM (Active State Power Management) level: <ul style="list-style-type: none">• Auto: There is handshaking between the device and PCI Express hub to determine the best ASPM mode supported by the device. Enabled by default.• Disabled: ASPM power management is turned off always.• L1 Only: ASPM power management is set to use L1

Updating the BIOS in Windows

Prerequisites

It is recommended to update your BIOS (System Setup), when you replace the system board or if an update is available. For laptops, ensure that your computer battery is fully charged and connected to a power before initiating a BIOS update.

About this task

NOTE: If BitLocker is enabled, it must be suspended prior to updating the system BIOS, and then re enabled after the BIOS update is completed.

Steps

1. Restart the computer.
2. Go to **Dell.com/support**.
 - Enter the **Service Tag** or **Express Service Code** and click **Submit**.
 - Click **Detect Product** and follow the instructions on screen.
3. If you are unable to detect or find the Service Tag, click **Choose from all products**.
4. Choose the **Products** category from the list.

NOTE: Choose the appropriate category to reach the product page
5. Select your computer model and the **Product Support** page of your computer appears.
6. Click **Get drivers** and click **Drivers and Downloads**.
The Drivers and Downloads section opens.
7. Click **Find it myself**.
8. Click **BIOS** to view the BIOS versions.
9. Identify the latest BIOS file and click **Download**.
10. Select your preferred download method in the **Please select your download method below** window, click **Download File**.
The **File Download** window appears.
11. Click **Save** to save the file on your computer.
12. Click **Run** to install the updated BIOS settings on your computer.
Follow the instructions on the screen.

Updating BIOS on systems with BitLocker enabled

CAUTION: If BitLocker is not suspended before updating the BIOS, the next time you reboot the system it will not recognize the BitLocker key. You will then be prompted to enter the recovery key to progress and the system will ask for this on each reboot. If the recovery key is not known, this can result in data loss or an unnecessary operating system reinstall. For more information about this subject, see Knowledge Article: [Updating the BIOS on Dell Systems With BitLocker Enabled](#)

Updating your BIOS from the F12 One-Time Boot Menu

About this task

You can update your BIOS outside the operating system by using the <F12> one time boot menu. See Dell Knowledge Article for more information about this subject: Flashing the BIOS from the F12 One-Time Boot Menu: <https://www.dell.com/support/article/sln305230>

Updating your system BIOS using a USB flash drive

About this task

If the system cannot load into Windows, but there is still a need to update the BIOS, download the BIOS file using another system and save it to a bootable USB Flash Drive.

NOTE: You will need to use a bootable USB flash drive. Please refer to the following article for further details [How to Create a Bootable USB Flash Drive using Dell Diagnostic Deployment Package \(DDDP\)](#)

Steps

1. Download the BIOS update .EXE file to another system.
2. Copy the file e.g. O9010A12.EXE onto the bootable USB flash drive.
3. Insert the USB flash drive into the system that requires the BIOS update.
4. Restart the system and press F12 when the Dell splash logo appears to display the One Time Boot Menu.
5. Using arrow keys, select **USB Storage Device** and click **Enter**.
6. The system will boot to a Diag C:\> prompt.
7. Run the file by typing the full filename, for example, O9010A12.exe and press **Enter**.
8. The BIOS Update Utility will load. Follow the instructions on screen.

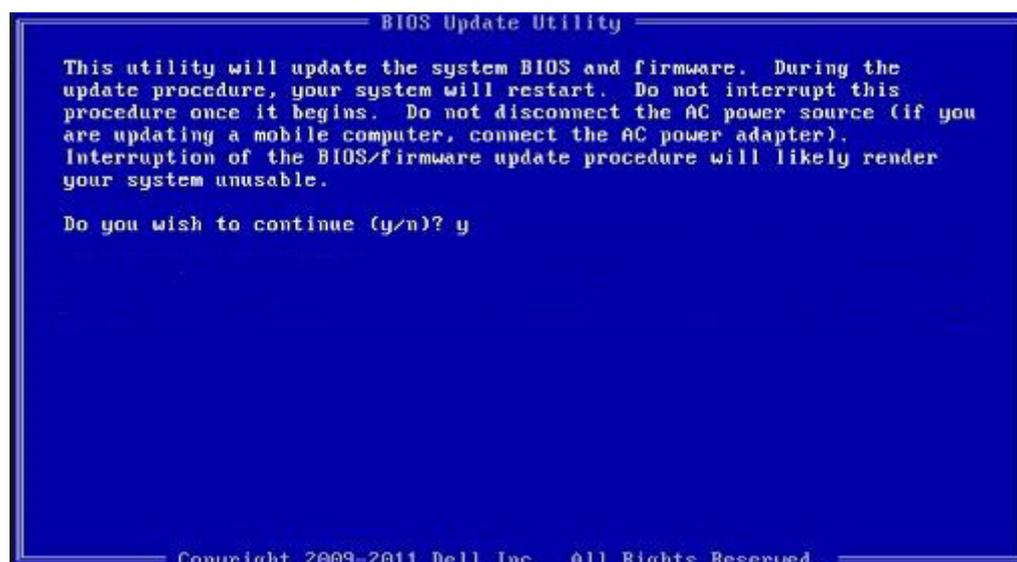


Figure 1. DOS BIOS Update Screen

System and setup password

Table 16. System and setup password

Password type	Description
System password	Password that you must enter to log on to your system.
Setup password	Password that you must enter to access and make changes to the BIOS settings of your computer.

You can create a system password and a setup password to secure your computer.

 **CAUTION:** The password features provide a basic level of security for the data on your computer.

 **CAUTION:** Anyone can access the data stored on your computer if it is not locked and left unattended.

 **NOTE:** System and setup password feature is disabled.

Assigning a system setup password

Prerequisites

You can assign a new **System or Admin Password** only when the status is in **Not Set**.

About this task

To enter the system setup, press F2 immediately after a power-on or reboot.

Steps

1. In the **System BIOS** or **System Setup** screen, select **Security** and press **Enter**.
The **Security** screen is displayed.
2. Select **System/Admin Password** and create a password in the **Enter the new password** field.
Use the following guidelines to assign the system password:
 - A password can have up to 32 characters.
 - The password can contain the numbers 0 through 9.
 - Only lower case letters are valid, upper case letters are not allowed.
 - Only the following special characters are allowed: space, ("), (+), (.), (-), (.), (/), (:), ([), (\), (]), (').
3. Type the system password that you entered earlier in the **Confirm new password** field and click **OK**.
4. Press Esc and a message prompts you to save the changes.
5. Press Y to save the changes.
The computer reboots.

Deleting or changing an existing system setup password

Prerequisites

Ensure that the **Password Status** is Unlocked (in the System Setup) before attempting to delete or change the existing System and Setup password. You cannot delete or change an existing System or Setup password, if the **Password Status** is Locked.

About this task

To enter the System Setup, press F2 immediately after a power-on or reboot.

Steps

1. In the **System BIOS** or **System Setup** screen, select **System Security** and press **Enter**.

The **System Security** screen is displayed.

2. In the **System Security** screen, verify that **Password Status** is **Unlocked**.
3. Select **System Password**, alter or delete the existing system password and press **Enter** or **Tab**.
4. Select **Setup Password**, alter or delete the existing setup password and press **Enter** or **Tab**.

 **NOTE: If you change the System and/or Setup password, re enter the new password when prompted. If you delete the System and Setup password, confirm the deletion when prompted.**

5. Press **Esc** and a message prompts you to save the changes.
6. Press **Y** to save the changes and exit from System Setup.
The computer restarts.

Troubleshooting

Enhanced Pre-Boot System Assessment (ePSA) diagnostics

About this task

The ePSA diagnostics (also known as system diagnostics) performs a complete check of your hardware. The ePSA is embedded with the BIOS and is launched by the BIOS internally. The embedded system diagnostics provides a set of options for particular devices or device groups allowing you to:

- Run tests automatically or in an interactive mode
- Repeat tests
- Display or save test results
- Run thorough tests to introduce additional test options to provide extra information about the failed device(s)
- View status messages that inform you if tests are completed successfully
- View error messages that inform you of problems encountered during testing

NOTE: Some tests for specific devices require user interaction. Always ensure that you are present at the computer terminal when the diagnostic tests are performed.

For more information, see [Dell ePSA Diagnostic 3.0](#).

Running the ePSA diagnostics

Steps

1. Turn on your computer.
2. As the computer boots, press the F12 key as the Dell logo appears.
3. On the boot menu screen, select the **Diagnostics** option.
4. Click the arrow at the bottom left corner.
Diagnostics front page is displayed.
5. Click the arrow in the lower-right corner to go to the page listing.
The items detected are listed.
6. To run a diagnostic test on a specific device, press Esc and click **Yes** to stop the diagnostic test.
7. Select the device from the left pane and click **Run Tests**.
8. If there are any issues, error codes are displayed.
Note the error code and validation number and contact Dell.

WiFi power cycle

About this task

If your computer is unable to access the internet due to WiFi connectivity issues a WiFi power cycle procedure may be performed. The following procedure provides the instructions on how to conduct a WiFi power cycle:

NOTE: Some ISPs (Internet Service Providers) provide a modem/router combo device.

Steps

1. Turn off your computer.

2. Turn off the modem.
3. Turn off the wireless router.
4. Wait for 30 seconds.
5. Turn on the wireless router.
6. Turn on the modem.
7. Turn on your computer.

Diagnostic LED

Instead of beep codes, errors are indicated via the bicolor Battery Charge/Status LED. A specific blink pattern is followed by flashing a pattern of flashes in amber, followed by white. The pattern then repeats.

NOTE: The diagnostic pattern consists of a two-digit number being represented by a first group of LED blinks (1 through 9) in amber, followed by a 1.5 second pause with the LED off, and then a second group of LED blinks (1 through 9) in white. This is then followed by a three second pause, with the LED off, before repeating over again. Each LED blink takes 1.5 seconds.

The system will not shutdown when displaying the Diagnostic Error Codes.

Diagnostic Error Codes will always supersede any other use of the LED.

Table 17. Diagnostic LED

Blinking Patterns		Problem description	Suggested resolutions
Amber	White		
2	1	CPU failure	<ul style="list-style-type: none"> • Run the Intel CPU diagnostics tools • If problem persists, replace the system board
2	2	System board failure (included BIOS corruption or ROM error)	<ul style="list-style-type: none"> • Flash latest BIOS version • If problem persists, replace the system board
2	3	No memory/ RAM detected	<ul style="list-style-type: none"> • Confirm that the memory module is installed properly • If problem persists, replace the system board
2	4	Memory/ RAM failure	<ul style="list-style-type: none"> • Reset the memory module • If problem persists, replace the system board
2	5	Invalid memory installed	<ul style="list-style-type: none"> • Reset the memory module • If problem persists, replace the system board
2	6	System board/ Chipset error	<ul style="list-style-type: none"> • Flash latest BIOS version • If problem persists, replace the system board
2	7	LCD failure	<ul style="list-style-type: none"> • Flash latest BIOS version • If problem persists, replace the system board
2	8	LCD Power rail failure	Replace the system board
3	1	CMOS battery failure	<ul style="list-style-type: none"> • Reset the CMOS battery connection • If problem persists, replace the system board

Blinking Patterns		Problem description	Suggested resolutions
Amber	White		
3	2	PCI or Video card/ chip failure	Replace the system board
3	3	BIOS Recovery Image not found	<ul style="list-style-type: none"> Flash latest BIOS version If problem persists, replace the system board
3	4	BIOS Recovery Image found but invalid	<ul style="list-style-type: none"> Flash latest BIOS version If problem persists, replace the system board
3	5	Power Rail Failure	<ul style="list-style-type: none"> EC ran into power sequencing failure If problem persists, replace the system board
3	6	SBIOS Flash Corruption	<ul style="list-style-type: none"> Flash corruption detected by SBIOS If problem persists, replace the system board
3	7	ME Error	<ul style="list-style-type: none"> Timeout waiting on ME to reply to HECI message If problem persists, replace the system board

NOTE: For diagnostics pattern 2-amber, 8-white connects an external monitor to isolate between system board or graphics controller failure.

Getting help

Topics:

- [Contacting Dell](#)

Contacting Dell

Prerequisites

 **NOTE:** If you do not have an active Internet connection, you can find contact information on your purchase invoice, packing slip, bill, or Dell product catalog.

About this task

Dell provides several online and telephone-based support and service options. Availability varies by country and product, and some services may not be available in your area. To contact Dell for sales, technical support, or customer service issues:

Steps

1. Go to **Dell.com/support**.
2. Select your support category.
3. Verify your country or region in the **Choose a Country/Region** drop-down list at the bottom of the page.
4. Select the appropriate service or support link based on your need.