

# Dell OptiPlex 390/3010

## Setup And Features Information

### About Warnings

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

### Mini-Tower — Front And Back View

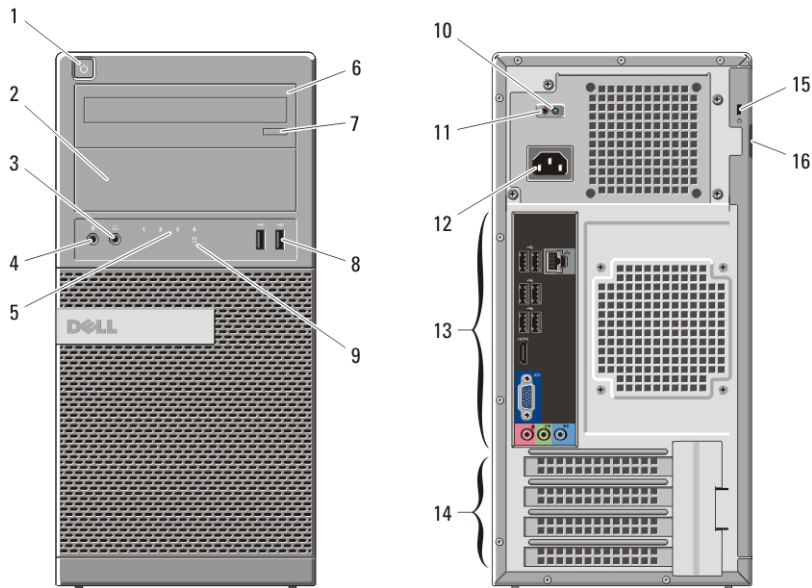


Figure 1. Front And Back View Of Mini-Tower

- |                          |                                   |
|--------------------------|-----------------------------------|
| 1. power button          | 6. optical drive                  |
| 2. optical drive bay     | 7. optical-drive eject button     |
| 3. headphone connector   | 8. USB 2.0 connectors (2)         |
| 4. microphone connector  | 9. hard-drive activity light      |
| 5. diagnostic lights (4) | 10. power-supply diagnostic light |




OGVJ7WA02

Regulatory Model: D04S, D07D, D12M  
Regulatory Type: D04S001, D07D001,  
D12M001  
2012 - 05

- 11. power-supply diagnostic button
- 12. power cable connector
- 13. back panel connectors
- 14. expansion card slots (4)
- 15. security cable slot
- 16. padlock ring

## Desktop — Front And Back View

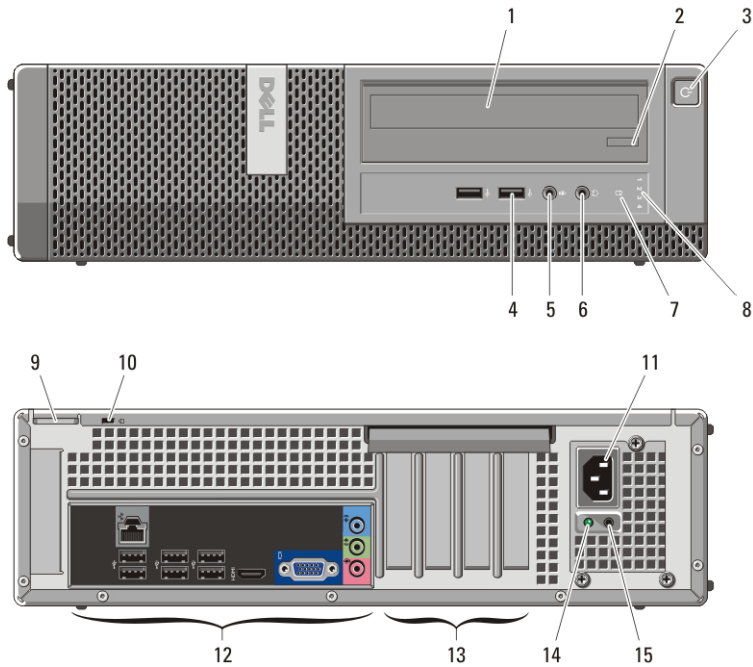


**Figure 2. Front And Back View Of Desktop**

- 1. optical drive
- 2. optical-drive eject button
- 3. power button
- 4. USB 2.0 connectors (2)
- 5. microphone connector
- 6. headphone connector
- 7. hard-drive activity light
- 8. diagnostic lights (4)
- 9. padlock ring
- 10. security cable slot
- 11. power cable connector
- 12. back panel connectors
- 13. expansion card slots (4)
- 14. power-supply diagnostic light

- 15. power-supply diagnostic button


## Mini-Tower And Desktop — Back Panel

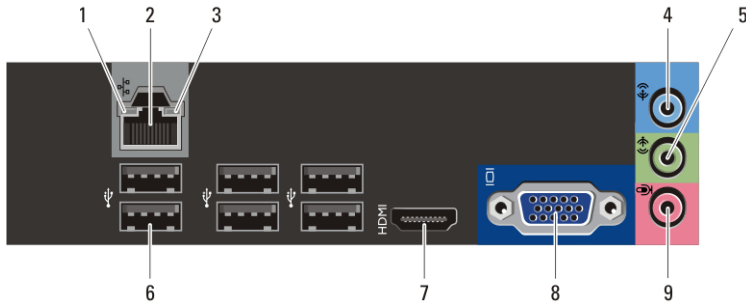

**Figure 3. Back Panel View of Mini-Tower And Desktop**

- |                           |                           |
|---------------------------|---------------------------|
| 1. link integrity light   | 6. USB 2.0 connectors (6) |
| 2. network connector      | 7. HDMI connector         |
| 3. network activity light | 8. VGA connector          |
| 4. line-in connector      | 9. microphone connector   |
| 5. line-out connector     |                           |

## Small Form Factor — Front And Back View

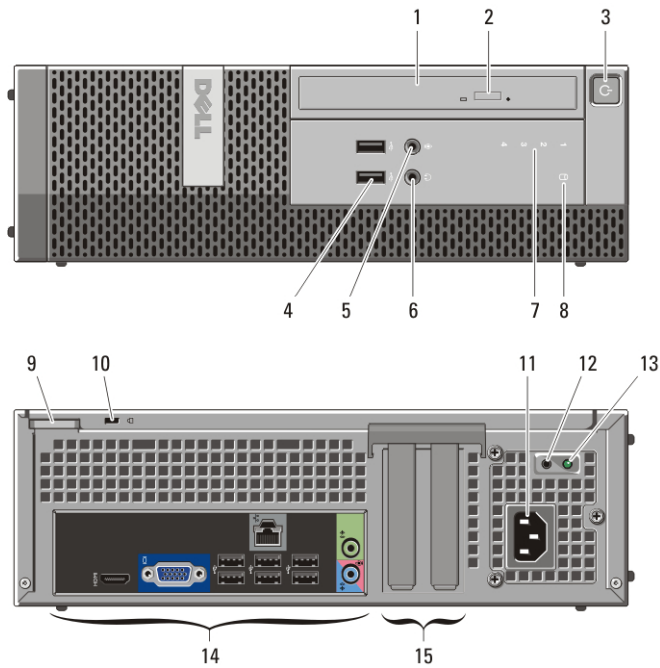

**Figure 4. Front And Back View Of Small Form Factor**

1. optical drive
2. optical-drive eject button
3. power button
4. USB 2.0 connectors (2)
5. microphone connector
6. headphone connector
7. diagnostic lights (4)
8. hard-drive activity light
9. padlock ring
10. security cable slot
11. power cable connector
12. power-supply diagnostic button
13. power-supply diagnostic light
14. back panel connectors
15. expansion card slots (2)

## Small Form Factor — Back Panel

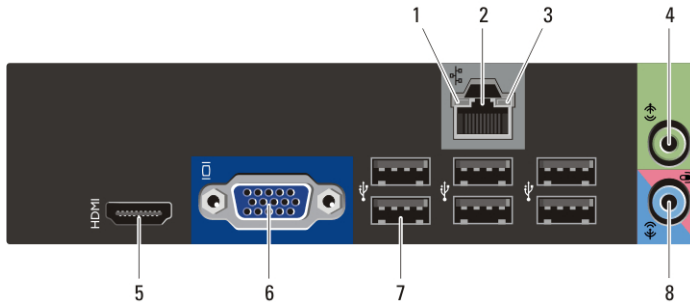


Figure 5. Back Panel View of Small Form Factor

- |                           |                                 |
|---------------------------|---------------------------------|
| 1. link integrity light   | 6. VGA connector                |
| 2. network connector      | 7. USB 2.0 connectors (6)       |
| 3. network activity light | 8. line-in/microphone connector |
| 4. line-out connector     |                                 |
| 5. HDMI connector         |                                 |

## Quick Setup

**⚠ WARNING:** Before you begin any of the procedures in this section, read the safety information that shipped with your computer. For additional best practices information, see [www.dell.com/regulatory\\_compliance](http://www.dell.com/regulatory_compliance)

**✍ NOTE:** Some devices may not be included if you did not order them.

1. Connect the monitor using only one of the following cables:





Figure 6. HDMI Connector




**Figure 7. VGA Connector**

2. Connect the USB keyboard or mouse (optional).




**Figure 8. USB Connection**

3. Connect the network cable (optional).



**Figure 9. Network Connection**

4. Connect the power cable(s).




**Figure 10. Connecting Power**

5. Press the power buttons on the monitor and the computer.




Figure 11. Power Button

## Specifications

 **NOTE:** The following specifications are only those required by law to ship with your computer. For a complete and current listing of the specifications for your computer, go to [support.dell.com](http://support.dell.com).

Power	
Coin-cell battery	3 V CR2032 lithium coin cell
Voltage	
Desktop/Mini-Tower/ Small Form Factor	100 VAC to 240 VAC
Wattage	
Desktop	250 W
Mini-Tower	265 W
Small Form Factor	240 W
Maximum heat dissipation	
Desktop	853 BTU/hr
Mini-Tower	904 BTU/hr
Small Form Factor	819 BTU/hr

 **NOTE:** Heat dissipation is calculated by using the power supply wattage rating.

Physical	Mini-Tower	Desktop	Small Form Factor
Height	360.00 mm (14.17 inches)	360.00 mm (14.17 inches)	290.00 mm (11.42 inches)
Width	175.00 mm	102.00 mm	92.60 mm

Physical	Mini-Tower	Desktop	Small Form Factor
	(6.89 inches)	(4.01 inches)	(3.64 inches)
Depth	417.00 mm	410.00 mm	312.00 mm
	(16.42 inches)	(16.14 inches)	(12.28 inches)
Weight (Minimum)	8.87 kg	7.56 kg	5.70 kg
	(19.55 lb)	(16.67 lb)	(12.57 lb)

---

### Environmental

---

Operating temperature      10 °C to 35 °C (50 °F to 95 °F)

## Information para NOM (únicamente para México)

The following information is provided on the device described in this document in compliance with the requirements of the official Mexican standards (NOM).

Voltaje de alimentación	100 V CA – 240 V CA
Frecuencia	50 Hz – 60 Hz
Consumo eléctrico	
D04S	4,0 A / 2,0 A
D07D	4,4 A / 2,2 A
D12M	5,0 A / 2,5 A

## Finding More Information and Resources

See the safety and regulatory documents that shipped with your computer and the regulatory compliance website at [www.dell.com/regulatory\\_compliance](http://www.dell.com/regulatory_compliance) for more information on:

- Safety best practices
- Regulatory certification
- Ergonomics

See [www.dell.com](http://www.dell.com) for additional information on:

- Warranty
- Terms and Conditions (U.S. only)
- End User License Agreement



Additional information on your product is available at [support.dell.com/manuals](http://support.dell.com/manuals).

**Information in this publication is subject to change without notice.**

**© 2012 Dell Inc. All rights reserved.**

Reproduction of these materials in any manner whatsoever without the written permission of Dell Inc. is strictly forbidden.

Trademarks used in this text: Dell™, the DELL logo, Dell Precision™, Precision ON™, ExpressCharge™, Latitude™, Latitude ON™, OptiPlex™, Vostro™, and Wi-Fi Catcher™ are trademarks of Dell Inc. Intel®, Pentium®, Xeon®, Core™, Atom™, Centrino®, and Celeron® are registered trademarks or trademarks of Intel Corporation in the U.S. and other countries. AMD® is a registered trademark and AMD Opteron™, AMD Phenom™, AMD Sempron™, AMD Athlon™, ATI Radeon™, and ATI FirePro™ are trademarks of Advanced Micro Devices, Inc. Microsoft®, Windows®, MS-DOS®, Windows Vista®, the Windows Vista start button, and Office Outlook® are either trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries. Blu-ray Disc™ is a trademark owned by the Blu-ray Disc Association (BDA) and licensed for use on discs and players. The Bluetooth® word mark is a registered trademark and owned by the Bluetooth® SIG, Inc. and any use of such mark by Dell Inc. is under license. Wi-Fi® is a registered trademark of Wireless Ethernet Compatibility Alliance, Inc.

Other trademarks and trade names may be used in this publication to refer to either the entities claiming the marks and names or their products, Dell Inc. disclaims any proprietary interest in trademarks and trade names other than its own.