


Dell™ Display Manager 用户指南

- [概述](#)
 - [使用快速设置对话](#)
 - [设置基本显示功能](#)
 - [分配预设模式至应用程序](#)
 - [应用节能特色](#)
 - [旋转屏幕内容](#)
-


概述

Dell Display Manager 为一种 Windows 应用程序，用于管理显示器或一组显示器。该程序允许手动调整显示图像、分配自动设置、能源管理、图像设置和其他所选 Dell 机型功能。一旦安装，Dell Display Manager 将在每次系统启动时运行，并将在通知托盘放置图标。将鼠标移至通知托盘图标时，始终会显示连接到系统的显示器信息。

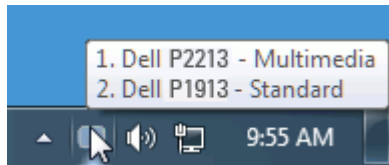

使用快速设置对话框


点击 Dell Display Manager 通知托盘图标，打开快速设置对话框。当一个以上支持的 Dell 机型连接到系统时，可以用所提供的菜单选择具体的目标显示器。快速设置对话框可以进行轻松显示器亮度和对比度调整，预设模式可以手动选择或设置到自动模式，屏幕分辨率可以更改。

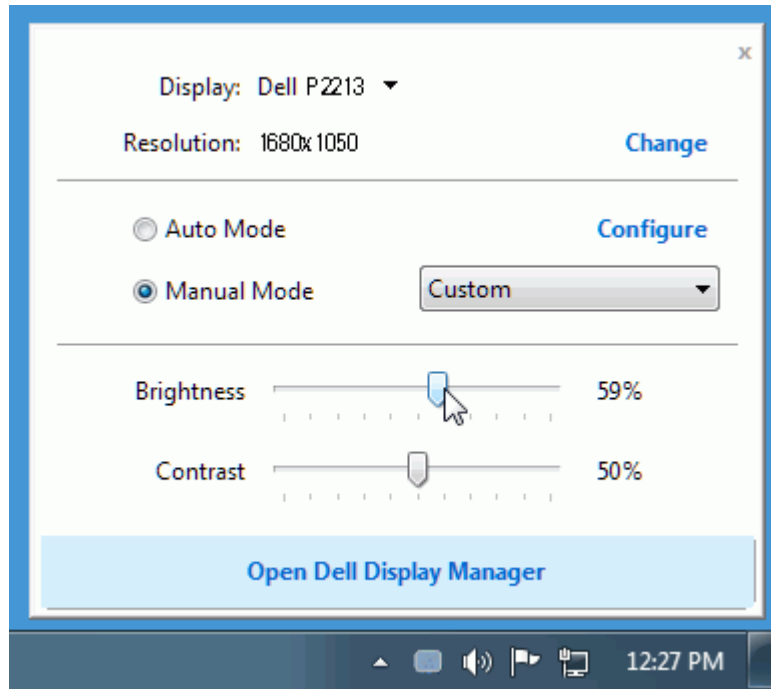

快速设置对话框也提供 Dell Display Manager 高级用户界面访问，用于调节基本功能，配置自动模式并访问其他功能。

设置基本显示功能


预设模式可以用基本选项下的菜单手动应用。另外，可以启用自动模式。自动模式可以在特定应用程序运行时自动应用您喜爱的预设模式。一旦模式更改，画面信息立即显示当前预设模式。所选显示器亮度和对比度也可以从基本选项直接调整。

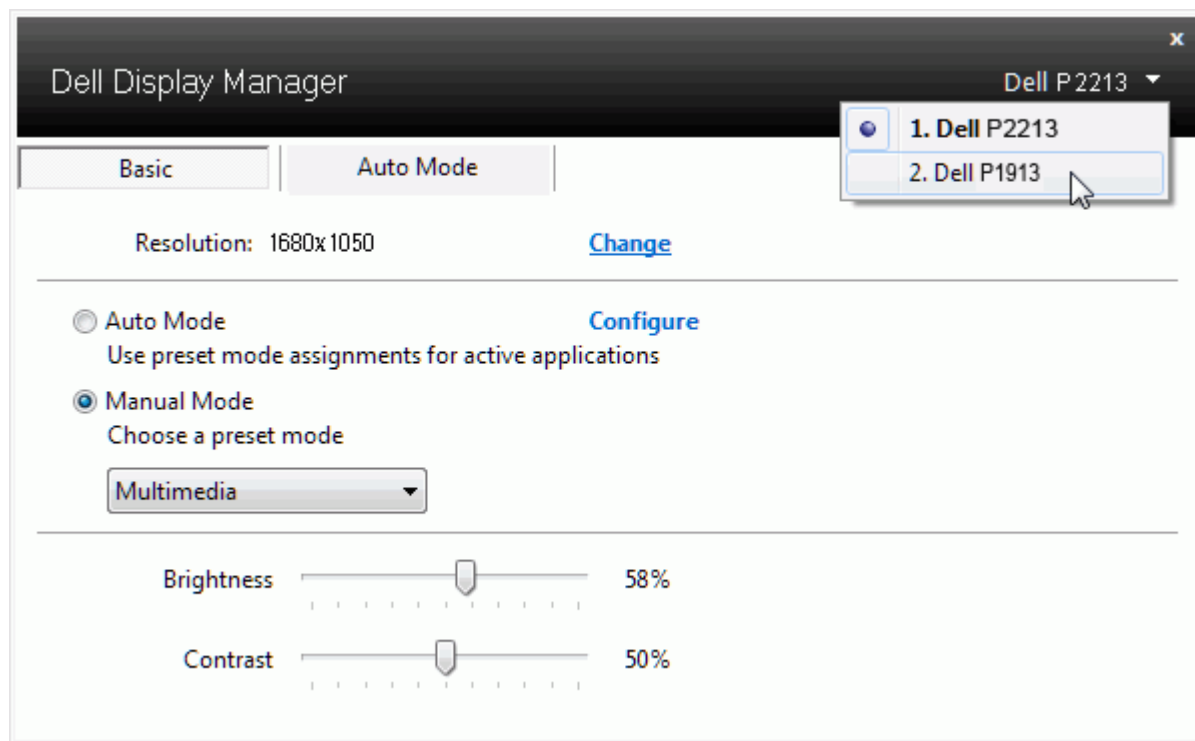


分配预设模式至应用程序

自动模式选项卡让您可以将具体预设模式与具体应用程序相关，并自动应用。当自动模式启用时，Dell Display Manager 将自动切换至相应预设模式，只要相关应用程序已经打开。每个连接的显示器指定给各自应用程序的预设模式可能一样，也可能根据显示器的不同而变化。

Dell Display Manager 已经为许多热门应用程序进行了预先配置。要添加新应用程序至指定列表，只需在桌面、Windows 开始菜单或其他地方将该应用程序拖放至当前列表之上。

 **注意：** 预设模式指定目标批文件、脚本和加载器以及诸如压缩文件或打包文件之类的非执行文件都不受支持并将无效。

另外，当 Direct3D 应用程序全屏运行时，可以启用选项，使“游戏”预设模式随时可用。要将此动作（如启用）用单个游戏标题覆盖，将其用不同预设模式列表添加至指定列表。任务列表中所出现的应用程序比一般 Direct3D 设置优先。

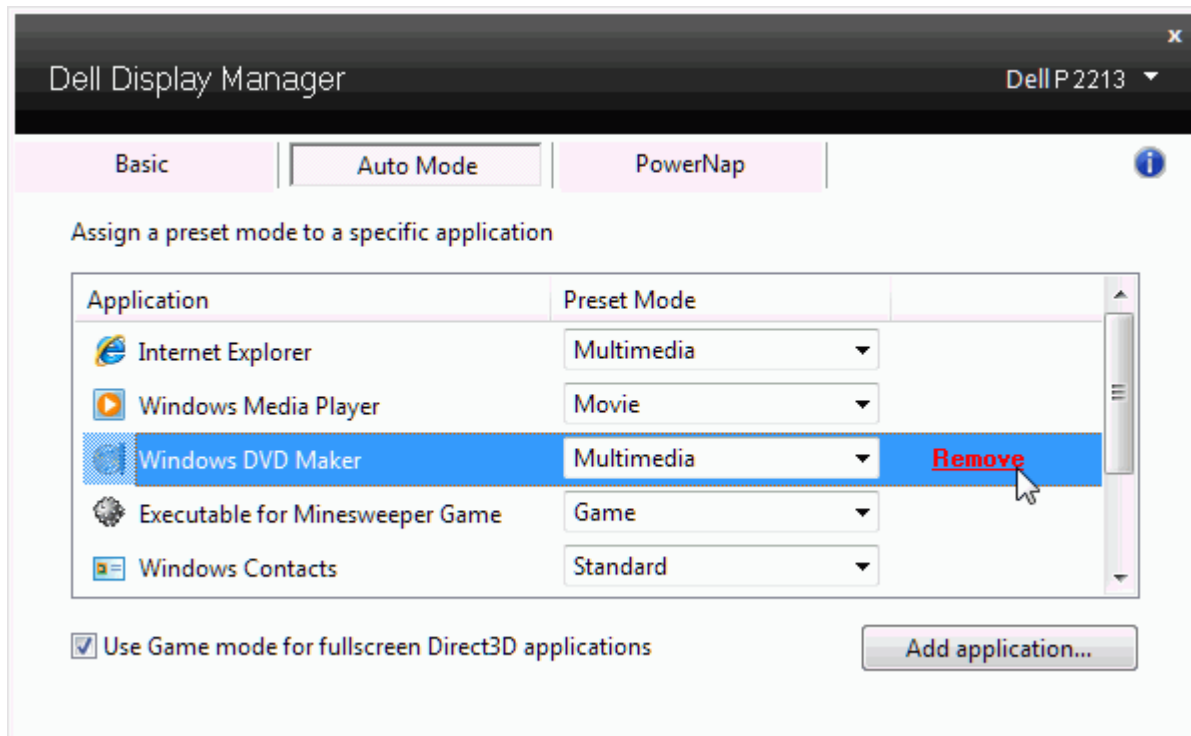


The screenshot shows the Dell Display Manager application window. The title bar reads "Dell Display Manager" and "Dell P 2213". There are three tabs: "Basic", "Auto Mode", and "PowerNap". The "Auto Mode" tab is selected. Below the tabs, the text "Assign a preset mode to a specific application" is displayed. A table lists applications and their assigned preset modes:

| Application | Preset Mode | |
|---------------------------------|-------------|---------------|
| Internet Explorer | Multimedia | |
| Windows Media Player | Movie | |
| Windows DVD Maker | Multimedia | Remove |
| Executable for Minesweeper Game | Game | |
| Windows Contacts | Standard | |

At the bottom left, there is a checked checkbox labeled "Use Game mode for fullscreen Direct3D applications". At the bottom right, there is a button labeled "Add application...".

应用节能特色

在支持的 Dell 机型上，PowerNap 选项可以提供节能功能。屏保激活时，显示器亮度可以自动设置到最低水平，或者显示器置于休眠状态以节省电力。

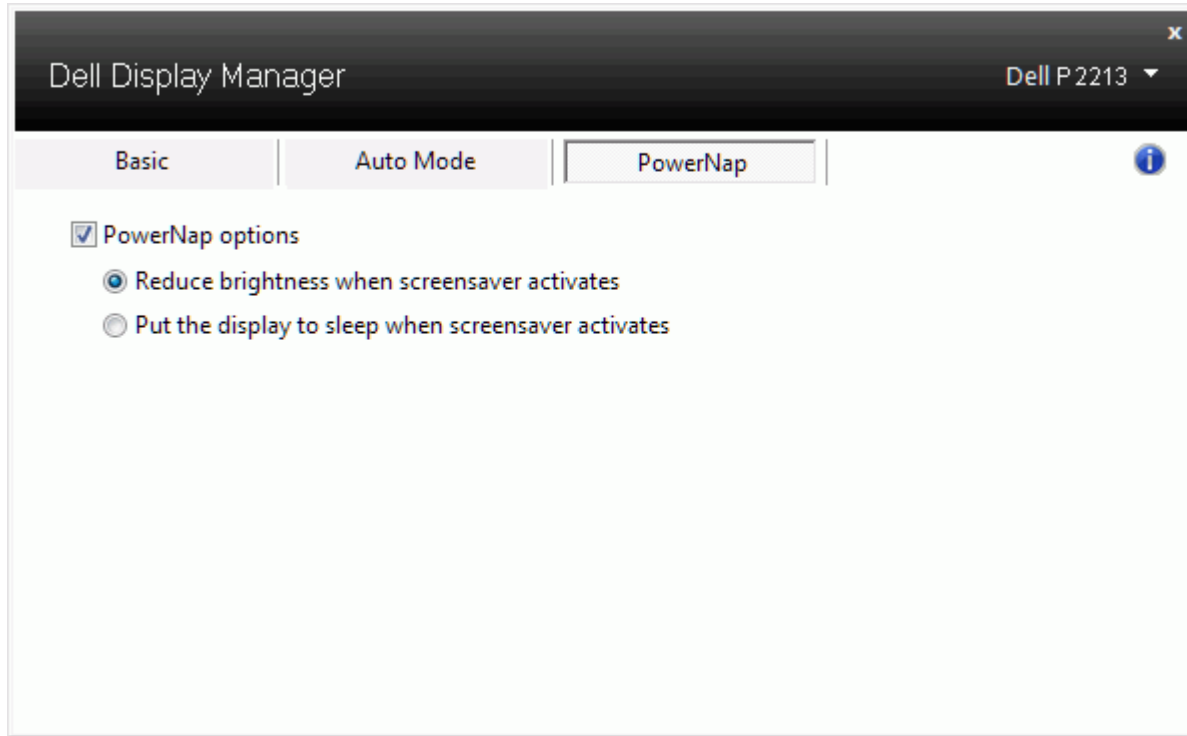

旋转屏幕内容

有些 Dell 机型有旋转功能。在这些显示器上，OSD 菜单中的其他设置项下的菜单旋转选项自动触发 Windows 屏幕方向的相应变化。

The image shows the OSD menu for a Dell P2213 monitor. The menu is organized into a sidebar on the left and a main content area on the right. The sidebar includes options like '亮度 / 对比度', '自动调节', '输入源', '颜色设置', '显示器设置', '其它设置', and '个性设置'. The '显示器设置' (Monitor Settings) option is selected, and the '菜单旋转' (Menu Rotation) option is highlighted in blue. The main content area lists various settings such as '语言' (Language), '菜单透明度' (Menu Transparency), '菜单定时器' (Menu Timer), '菜单锁' (Menu Lock), '智能节能' (Smart Energy), '省电音频' (Power Saving Audio), 'DDC/CI', 'LCD 调节' (LCD Adjustment), and '工厂重置' (Factory Reset). A '能耗' (Power Consumption) indicator is visible in the top right corner. At the bottom, the current resolution is '1280 x 1024 @ 60Hz' and the maximum resolution is '1680 x 1050 @ 60Hz'. A vertical navigation bar on the right side contains icons for back, forward, checkmark, and home.

| Category | Setting | Value |
|--------------------------|---------------------------|-----------------------------|
| 显示器设置 (Monitor Settings) | 语言 (Language) | 简体中文 (Simplified Chinese) |
| | 菜单透明度 (Menu Transparency) | 20 |
| | 菜单定时器 (Menu Timer) | 20 s |
| | 菜单锁 (Menu Lock) | 解锁 (Unlocked) |
| | 菜单旋转 (Menu Rotation) | |
| | 智能节能 (Smart Energy) | 关 (Off) |
| | 省电音频 (Power Saving Audio) | 开 (On) |
| | DDC/CI | 启用 (Enabled) |
| | LCD 调节 (LCD Adjustment) | 禁用 (Disabled) |
| | 工厂重置 (Factory Reset) | 重置所有设置 (Reset All Settings) |