

Power Supply Profile



Document Number: DCIM1047
Document Type: Specification
Document Status: Published
Document Language: E
Date: 2012-03-08

Version: 2.1.0

THIS PROFILE IS FOR INFORMATIONAL PURPOSES ONLY, AND MAY CONTAIN TYPOGRAPHICAL ERRORS AND TECHNICAL INACCURACIES. THE CONTENT IS PROVIDED AS IS, WITHOUT EXPRESS OR IMPLIED WARRANTIES OF ANY KIND. ABSENT A SEPARATE AGREEMENT BETWEEN YOU AND DELL™ WITH REGARD TO FEEDBACK TO DELL ON THIS PROFILE SPECIFICATION, YOU AGREE ANY FEEDBACK YOU PROVIDE TO DELL REGARDING THIS PROFILE SPECIFICATION WILL BE OWNED AND CAN BE FREELY USED BY DELL.

© 2012 Dell Inc. All rights reserved. Reproduction in any manner whatsoever without the express written permission of Dell, Inc. is strictly forbidden. For more information, contact Dell.

Dell and the *DELL* logo are trademarks of Dell Inc. *Microsoft* and *WinRM* are either trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries. Other trademarks and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Dell disclaims proprietary interest in the marks and names of others.

CONTENTS

1	Scope	5
2	Normative References.....	5
3	Terms and Definitions	5
4	Symbols and Abbreviated Terms	7
5	Synopsis.....	8
6	Description	9
7	Implementation Description.....	11
7.1	Power Supply View – DCIM_PowerSupplyView	11
7.2	Power Supply – DCIM_PowerSupply	14
7.3	Power Redundancy Set – DCIM_PowerRedundancySet.....	16
7.4	DCIM_LCRegisteredProfile – DCIM Power Supply Profile Profile Registration	17
7.5	DCIM_RegisteredProfile – DMTF Power Supply Profile Profile Registration.....	18
8	Methods.....	19
9	Use Cases.....	19
10	CIM Elements.....	19
11	Privilege and License Requirement	19

Figures

Figure 1 – Power Supply Profile Implementation.....	10
---	----

Tables

Table 1 – Related Profiles.....	8
Table 2 – Class Requirements: Power Supply Profile.....	11
Table 3 – DCIM_PowerSupplyView - Operations.....	12
Table 4 – DCIM_PowerSupplyView - Properties.....	12
Table 5 – DCIM_PowerSupply - Operations.....	14
Table 6 – DCIM_PowerSupply - Properties.....	14
Table 7 – DCIM_PowerRedundancySet - Operations.....	16
Table 8 – DCIM_PowerRedundancySet - Properties.....	17
Table 9 – DCIM_LCRegisteredProfile - Operations.....	17
Table 10 – DCIM_LCRegisteredProfile.....	18
Table 11 – DCIM_RegisteredProfile - Operations.....	19
Table 12 – DCIM_RegisteredProfile.....	19
Table 13 – Privilege and License Requirements.....	19

Power Supply Profile

1 Scope

The DCIM Power Supply Profile describes the properties and interfaces for executing system management tasks related to the management of power supplies within a system. The profile standardizes and aggregates the description for the power supply properties into a power supply view representation and provides static methodology for the clients to query the power supply views without substantial traversal of the model. Alternatively, the profile describes the CIM interface based on the DMTF Power Supply Profile.

2 Normative References

Refer to the following documents for more information.

NOTE: For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

- DMTF DSP1033, *Profile Registration Profile 1.0.0*
- DMTF DSP1015, *Power Supply Profile 1.1.0*
- DMTF DSP0226, *Web Services for Management (WS-Management) Specification 1.1.0*
- DMTF DSP0227, *WS-Management CIM Binding Specification 1.0.0*
- *Intelligent Platform Management Interface (IPMI) Specification 1.5*
- *Dell Lifecycle Controller Best Practices Guide 1.0*,
http://en.community.dell.com/techcenter/extras/m/white_papers/20066173.aspx
- *Dell WSMAN Licenses and Privileges 1.0*
- Dell Tech Center MOF Library: <http://www.delltechcenter.com/page/DCIM.Library.MOF>
- Related Managed Object Format (MOF) files:
 - DCIM_PowerSupplyView.mof
 - DCIM_PowerSupply.mof
 - DCIM_PowerRedundancySet.mof
 - DCIM_PSMemberOfCollection.mof
 - DCIM_PSOwningCollectionElement.mof
 - DCIM_CSHostedPowerRedundancy.mof
 - DCIM_SystemPSDevice.mof
 - DCIM_ElementConformsToProfile.mof
 - DCIM_RegisteredProfile.mof
 - DCIM_LCElementConformsToProfile.mof
 - DCIM_LCRegisteredProfile.mof

3 Terms and Definitions

For the purposes of this document, the following terms and definitions apply.

- 36 **3.1**
37 **Conditional** – Indicates requirements to be followed strictly in order to conform to the document when the
38 specified conditions are met.
- 39 **3.2**
40 **Mandatory** – Indicates requirements to be followed strictly in order to conform to the document and from
41 which no deviation is permitted.
- 42 **3.3**
43 **May** – Indicates a course of action permissible within the limits of the document.
- 44 **3.4**
45 **Optional** – Indicates a course of action permissible within the limits of the document.
- 46 **3.5**
47 **can** – Used for statements of possibility and capability, whether material, physical, or causal.
- 48 **3.6**
49 **cannot** – Used for statements of possibility and capability, whether material, physical, or causal.
- 50 **3.7**
51 **need not** – Indicates a course of action permissible within the limits of the document.
- 52 **3.8**
53 **referencing profile** – Indicates a profile that owns the definition of this class and can include a reference
54 to this profile in its “Related Profiles” table.
- 55 **3.9**
56 **shall** – Indicates requirements to be followed strictly in order to conform to the document and from which
57 no deviation is permitted.

- 58 **3.10**
59 **shall not** – Indicates requirements to be followed strictly in order to conform to the document and from
60 which no deviation is permitted.
- 61 **3.11**
62 **should** – Indicates that among several possibilities, one is recommended as particularly suitable, without
63 mentioning or excluding others, or that a certain course of action is preferred but not necessarily required.
- 64 **3.12**
65 **should not** – Indicates that a certain possibility or course of action is deprecated but not
66 prohibited
- 67 **3.13**
68 **FQDD** – Fully Qualified Device Descriptor is used to identify a particular component in a system.
- 69 **3.14**
70 **Interop Namespace** – Interop Namespace is where instrumentation instantiates classes to advertise its
71 capabilities for client discovery.
- 72 **3.15**
73 **Implementation Namespace** – Implementation Namespace is where instrumentation instantiates
74 classes relevant to executing core management tasks.
- 75 **3.16**
76 **ENUMERATE** – Refers to WS-MAN `ENUMERATE` operation as described in Section 8.2 of
77 `DSP0226_V1.1` and Section 9.1 of `DSP0227_V1.0`
- 78 **3.17**
79 **GET** – Refers to WS-MAN `GET` operation as defined in Section 7.3 of `DSP00226_V1.1` and Section 7.1
80 of `DSP0227_V1.0`

81 **4 Symbols and Abbreviated Terms**

- 82 **4.1**
83 **CIM - Common Information Model**
- 84 **4.2**
85 **iDRAC** - integrated Dell Remote Access Controller – management controller for blades and monolithic
86 servers
- 87 **4.3**
88 **CMC** - Chassis Manager Controller – management controller for the modular chassis
- 89 **4.4**
90 **CSIOR** - Collection of System Inventory on Reboot
91

92 **5 Synopsis**

93 **Profile Name:** Power Supply

94 **Version:** 1.1.0

95 **Organization:** Dell

96 **CIM Schema Version:** 2.26 Experimental

97 **Dell Schema Version:** 1.0.0

98 **Interop Namespace:** root/interop

99 **Implementation Namespace:** root/dcim

100 **Central Class:** DCIM_PowerSupplyView

101 **Scoping Class:** DCIM_ComputerSystem

102 The Dell Power Supply Profile is a component profile that contains the Dell specific implementation
103 requirements for power supply view.

104 DCIM_PowerSupplyView shall be the Central Class.

105 Table 1 identifies profiles that are related to this profile.


106

Table 1 – Related Profiles

Profile Name	Organization	Version	Relationship
Power Supply	DMTF	1.1	Specialize
Profile Registration	DCIM	1.0	Reference

107 **6 Description**

108 The Dell Power Supply Profile describes the platform's power supply information. Each platform power
 109 supply is represented by an instance of DCIM_PowerSupplyView class.

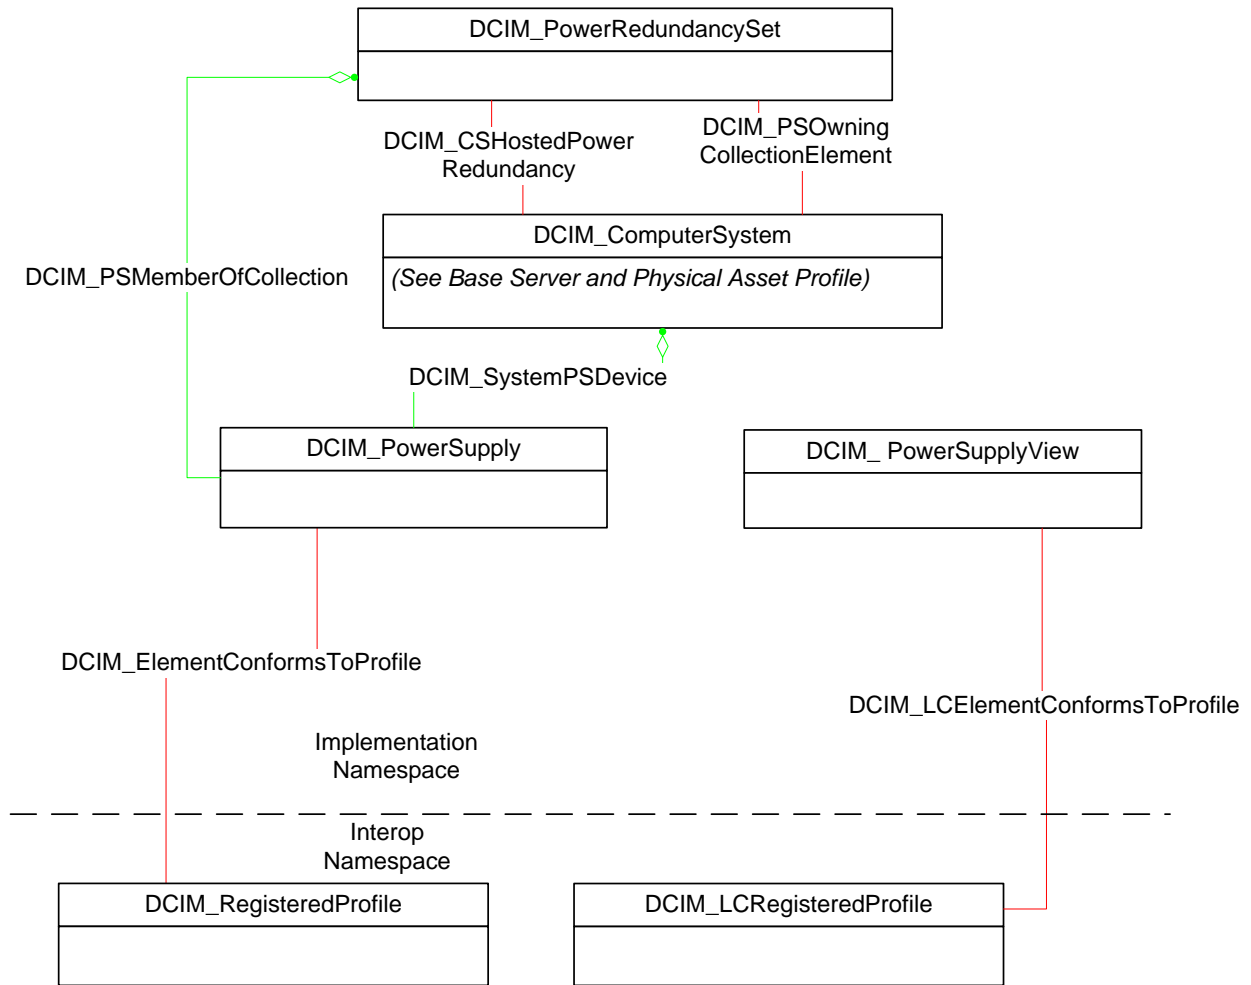

110

111

Figure 1 – Class Diagram


112 Figure 2 details typical Dell Power Supply Profile implementation for a platform containing two power
 113 supplies. For the client to discover the instrumentation's support of this profile, LCRegisteredProfile and
 114 RegisteredProfile are instantiated in the Interop Namespace.

115 LCRegisteredProfile instance provides information about the implemented DCIM profile: most importantly,
 116 the profile name, version of the profile, and the organization name that produced the profile.

117 RegisteredProfile provides the information about the DMTF profile

118 Psu1 and psu2 are the power supply views representing the two power supplies in the Implementation
 119 Namespace. They are associated to the Interop namespace's PowerSupplyProfile instance.

120 Pwrsupply1 and pwrsupply2 represent the same two power supplies as well but in the DMTF Power
 121 Supply Profile described interface.

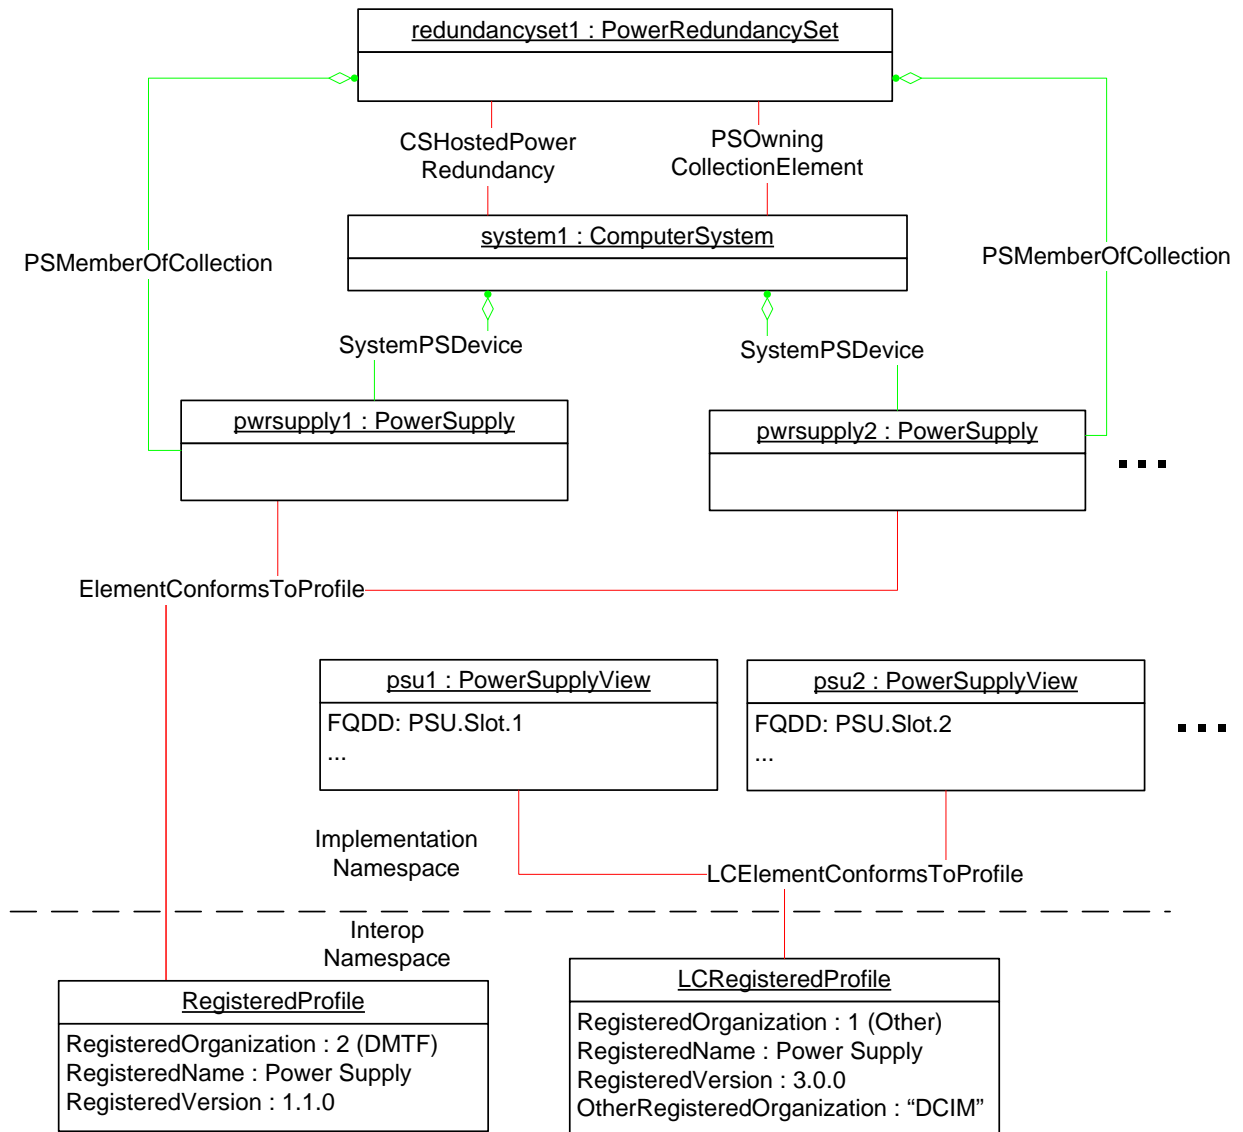

122

123

Figure 2 – Power Supply Profile Implementation

124 **7 Implementation Requirements**

125 This section describes the requirements and guidelines for implementing Power Supply Profile.

126 **Table 2 – Class Requirements: Power Supply Profile**

Element Name	Requirement	Description
Classes		
DCIM_PowerSupplyView	Mandatory	The class shall be implemented in the <i>Implementation Namespace</i> . See section 7.1.
DCIM_PowerSupply	Mandatory	The class shall be implemented in the <i>Implementation Namespace</i> . See section 7.2.
DCIM_PowerRedundancySet	Mandatory	The class shall be implemented in the <i>Implementation Namespace</i> . See section 7.3.
DCIM_PSMemberOfCollection	Mandatory	The class shall be implemented in the <i>Implementation Namespace</i> . See section 7.2 and 7.3.
DCIM_PSOwningCollectionElement	Mandatory	The class shall be implemented in the <i>Implementation Namespace</i> . See section 7.3.
DCIM_CSHostedPowerRedundancy	Mandatory	The class shall be implemented in the <i>Implementation Namespace</i> . See section 7.3.
DCIM_SystemPSDevice	Mandatory	The class shall be implemented in the <i>Implementation Namespace</i> . See section 7.2.
DCIM_ElementConformsToProfile	Mandatory	The class shall be implemented in both the <i>Interop</i> and <i>Implementation Namespaces</i> . See section 7.5
DCIM_RegisteredProfile	Mandatory	The class shall be implemented in the <i>Interop Namespace</i> . See section 7.5
DCIM_LCElementConformsToProfile	Mandatory	The class shall be implemented in both the <i>Interop</i> and <i>Implementation Namespaces</i> . See section 7.4
DCIM_LCRegisteredProfile	Mandatory	The class shall be implemented in the <i>Interop Namespace</i> . See section 7.4
Indications		
None defined in this profile		

127

128 **7.1 Power Supply View – DCIM_PowerSupplyView**

129 This section describes the implementation for the DCIM_PowerSupplyView class that represents a power
 130 supply and its aggregate characteristics.

131 This class shall be instantiated in the Implementation Namespace.
 132 The DCIM_LCElementConformsToProfile association(s) shall reference the DCIM_PowerSupplyView
 133 instance(s).

134

135 **7.1.1 Resource URIs for WinRM®**

136 The class Resource URI shall be “http://schemas.dell.com/wbem/wscim/1/cim-
 137 schema/2/DCIM_PowerSupplyView?__cimnamespace=root/dcim”

138 The key property shall be the InstanceID.

139 The instance Resource URI for DCIM_PowerSupplyView instance shall be:
 140 “http://schemas.dell.com/wbem/wscim/1/cim-schema/2/DCIM_PowerSupplyView?
 141 ?__cimnamespace=root/dcim+InstanceID=<FQDD>”

142 **7.1.2 Operations**

143 The following table lists the operations implemented on DCIM_PowerSupplyView.

144 **Table 3 – DCIM_PowerSupplyView - Operations**

Operation Name	Requirements	Required Input
Get	Mandatory	Instance URI
Enumerate	Mandatory	Class URI

145

146 **7.1.3 Class Properties**

147 The following table lists the implemented properties for DCIM_PowerSupplyView instance in a system.
 148 The “Requirements” column shall denote whether the property is implemented (for requirement
 149 definitions, see section 3). The “Additional Requirements” column shall denote either possible values for
 150 the property, or requirements on the value formulation.

151 **Table 4 – DCIM_PowerSupplyView - Properties**

Property Name	Requirements	Type	Additional Requirements
InstanceID	Mandatory	string	The property value shall be the FQDD property value.
FQDD	Mandatory	string	A string containing the Fully Qualified Device Description, a user-friendly name for the object.
TotalOutputPower	Mandatory	uint32	Represents the total output power of the power supply in Watts. The property value shall be in Watts. 0 shall mean “Unknown”.
InputVoltage	Mandatory	uint32	This property provides the input voltage for the supply in Volts. The property value shall be in Volts. 0 shall mean “Unknown”.
PrimaryStatus	Mandatory	uint32	This property provides a high level status value, intended to align with Red-Yellow-Green type representation of status.

Property Name	Requirements	Type	Additional Requirements
Type	Mandatory	uint16	This property indicates the device type of the power supply and shall have the following values: <ul style="list-style-type: none"> • 0 (AC) • 1 (DC).
DetailedState	Mandatory	string	This property describes the further status of the power supply as enumerated for IPMI power supply sensor such as: <ul style="list-style-type: none"> • Predictive Failure • Power Supply AC lost • AC lost or out-of-range • AC out-of-range, but present.
RedMinNumberNeeded	Mandatory	uint32	This property indicates the smallest number of power supplies that MUST be operational to function in redundancy. The property value of 0 shall mean Unknown.
RedTypeOfSet[]	Mandatory	uint16	This property provides information on the type of redundancy and shall have the following values: <ul style="list-style-type: none"> • 0 (Unknown) • 1 (Other) • 2 (N+1) • 3 (Load Balanced) • 4 (Sparing) • 5 (Limited Sparing)
RedundancyStatus	Mandatory	uint16	This property provides information on the state of the power supply redundancy. The property value shall be one of the following: <ul style="list-style-type: none"> • 0 (Unknown) • 2 (Fully Redundant) • 3 (Degraded Redundancy) • 4 (Redundancy Lost) • 5 (Overall Failure)
Manufacturer	Mandatory	string	The name of the organization responsible for producing the power supply.
Model	Mandatory	string	The make and or model of the product.
SerialNumber	Mandatory	string	A manufacturer-allocated number used to identify the power supply.
PartNumber	Mandatory	string	The part number assigned by the organization that is responsible for producing or manufacturing the power supply.
FirmwareVersion	Mandatory	string	A string containing the power supply's firmware version.
LastSystemInventoryTime	Mandatory	string	This property provides the last time Collection of System Inventory on Reboot (CSIOR) was performed. The value is represented as yyyyymmddHHMMSS.
LastUpdateTime	Mandatory	string	This property provides the last time the data was updated. The value is represented as yyyyymmddHHMMSS

152 **7.2 Power Supply – DCIM_PowerSupply**

153 This section describes the implementation for the DCIM_PowerSupply class that represents a power
 154 supply..

155 This class shall be instantiated in the Implementation Namespace.

156 The DCIM_SystemPSDevice association shall reference DCIM_PowerSupply instances and the
 157 DCIM_ComputerSystem instance.

158 The DCIM_PSMemberOfCollection association shall reference DCIM_PowerSupply instances and the
 159 DCIM_PowerRedundancySet instance.

160 **7.2.1 Resource URIs for WinRM®**

161 The class Resource URI shall be “http://schemas.dell.com/wbem/wscim/1/cim-
 162 schema/2/DCIM_PowerSupply?__cimnamespace=root/dcim”

163 The key properties shall be the SystemCreationClassName, SystemName, CreationClassName and
 164 DeviceID.

165 The instance Resource URI for DCIM_PowerSupply instance shall be:
 166 “http://schemas.dell.com/wbem/wscim/1/cim-schema/2/DCIM_PowerSupplyView?
 167 ?__cimnamespace=root/dcim+SystemCreationClassName=DCIM_ComputerSystem+SystemName=srv:system+CreationClassName=DCIM_PowerSupply+DeviceID =<DeviceID>”

169 **7.2.2 Operations**

170 The following table lists the operations implemented on DCIM_PowerSupply.

171 **Table 5 – DCIM_PowerSupply - Operations**

Operation Name	Requirements	Required Input
Get	Mandatory	Instance URI
Enumerate	Mandatory	Class URI

172

173 **7.2.3 Class Properties**

174 The following table lists the implemented properties for DCIM_PowerSupply instance in a system. The
 175 “Requirements” column shall denote whether the property is implemented (for requirement definitions,
 176 see section 3). The “Additional Requirements” column shall denote either possible values for the property,
 177 or requirements on the value formulation.

178 **Table 6 – DCIM_PowerSupply - Properties**

Property Name	Requirements	Type	Additional Requirement
SystemCreationClassName	Mandatory	string	This property value shall be "DCIM_ComputerSystem"
SystemName	Mandatory	string	This property value shall be "srv:system"
CreationClassName	Mandatory	string	This property value shall be "DCIM_PowerSupply"
DeviceID	Mandatory	string	The property value shall be unique identifier.
ElementName	Mandatory	string	This property value shall be "Power Supply".

Property Name	Requirements	Type	Additional Requirement
InputPowerUnits	Mandatory	string	This property indicates the programmatic units for the input power properties. This property value shall be in "watts".
RatedMaxOutputPower	Mandatory	uint32	This property indicates the maximum amount of output (DC) power. 0 shall mean "Unknown".
TotalOutputPower	Mandatory	uint32	This property represents the total output power of the PowerSupply in milli watts. 0 shall mean "Unknown".
RequestedState	Mandatory	uint16	The property value shall be 12 (Not Applicable).
ActiveInputVoltage	Mandatory	uint16	This property indicates the input voltage range that is currently in use. The property value shall be: <ul style="list-style-type: none"> • 2 (Unknown), • 3 (Range1).
EnabledState	Mandatory	uint16	The property value shall be 2 (Enabled).
IsSwitchingSupply	Mandatory	boolean	This property indicates that the Power Supply is a switching (instead of linear) supply. This property shall have a value of "TRUE".
IsACInput	Mandatory	boolean	The property shall indicate whether power supply is direct current (DC) or alternating current (AC) powered. A value of true shall indicate the required input of the PowerSupply is AC.
IsACOutput	Mandatory	boolean	A value of false shall indicate the output from the PowerSource is direct current (DC). This property shall have a value of "FALSE"
Range1InputVoltageHigh	Mandatory	uint32	The high voltage of Input Voltage Range 1 for this Power Supply. The property value shall be in Milli Volts
Range1MaxInputPower	Mandatory	uint32	This property indicates the maximum amount of power that this Power Supply may draw. The property value shall be in Watts.
OperationalStatus[]	Mandatory	uint16	The property value shall be one of the following: <ul style="list-style-type: none"> • 0(Unknown) • 2(OK) • 3(Degraded) • 6 (Error)
PrimaryStatus	Mandatory	uint16	The property value shall be one of the following: <ul style="list-style-type: none"> • 0(Unknown) • 1(OK) • 2(Degraded) • 3 (Error)

Property Name	Requirements	Type	Additional Requirement
HealthState	Mandatory	uint16	The property value shall be one of the following: <ul style="list-style-type: none"> • 0(Unknown) • 5 (OK) • 10(Degraded/Warning) • 25 (Critical Failure)

179

180 7.3 Power Redundancy Set – DCIM_PowerRedundancySet

181 This section describes the implementation for the DCIM_PowerRedundancySet class represents the
182 characteristics of the power supply redundancy.

183 This class shall be instantiated in the Implementation Namespace.

184 The DCIM_PSMemberOfCollection association shall reference DCIM_PowerSupply instances and the
185 DCIM_PowerRedundancySet instance.

186 The DCIM_PSOwningCollectionElement association shall reference the DCIM_PowerRedundancySet
187 instance and the DCIM_ComputerSystem instance.

188 The DCIM_CSHostedPowerRedundancy association shall reference the DCIM_PowerRedundancySet
189 instance and the DCIM_ComputerSystem instance.

190 7.3.1 Resource URIs for WinRM®

191 The class Resource URI shall be “http://schemas.dell.com/wbem/wscim/1/cim-
192 schema/2/DCIM_PowerRedundancySet?__cimnamespace=root/dcim”

193 The key property shall be the InstanceID.

194 The instance Resource URI for DCIM_PowerRedundancySet instance shall be:
195 “http://schemas.dell.com/wbem/wscim/1/cim-schema/2/DCIM_PowerRedundancySet?
196 ?__cimnamespace=root/dcim+InstanceID= RedundancySet:1”

197 7.3.2 Operations

198 The following table lists the operations implemented on DCIM_PowerRedundancySet.

199 **Table 7 – DCIM_PowerRedundancySet - Operations**

Operation Name	Requirements	Required Input
Get	Mandatory	Instance URI
Enumerate	Mandatory	Class URI

200

201 7.3.3 Class Properties

202 The following table lists the implemented properties for DCIM_PowerSupply instance in a system. The
203 “Requirements” column shall denote whether the property is implemented (for requirement definitions,
204 see section 3). The “Additional Requirements” column shall denote either possible values for the property,
205 or requirements on the value formulation.

Table 8 – DCIM_PowerRedundancySet - Properties

Property Name	Requirements	Type	Additional Requirement
InstanceID	Mandatory	string	The property value shall be "RedundancySet:1"
MinNumberNeeded	Mandatory	uint32	This property value shall be 1.
TypeOfSet[]	Mandatory	uint16	This property value shall always contain 2(N+1) redundancy and may contain: <ul style="list-style-type: none"> • 32768 (Input Power Redundancy), if the PSRedundancyPolicy attribute is set to "Input Power Redundant", • 4 (Sparing), if the PSRapidOn and PrimaryPSU attributes are set.
RedundancyStatus	Mandatory	uint16	The property value shall be one of the following: <ul style="list-style-type: none"> • 0 (Unknown) • 2 (Fully Redundant) • 3 (Degraded Redundancy) • 4 (Redundancy Lost) • 5 (Overall Failure)
ElementName	Mandatory	string	This property value shall be "System Board PS Redundancy".

207 **7.4 DCIM_LCRegisteredProfile – DCIM Power Supply Profile Profile**

208 **Registration**

209 This section describes the implementation for the DCIM_LCRegisteredProfile class.

210 This class shall be instantiated in the Interop Namespace.

211 The DCIM_LCElementConformsToProfile association shall reference the DCIM_LCRegisteredProfile
212 instance and the DCIM_PowerSupplyView instances.

213 **7.4.1 Resource URIs for WinRM®**

214 The class Resource URI shall be "http://schemas.dell.com/wbem/wscim/1/cim-
215 schema/2/DCIM_LCRegisteredProfile?__cimnamespace=root/interop"

216 The instance Resource URI shall be: "http://schemas.dell.com/wbem/wscim/1/cim-
217 schema/2/DCIM_LCRegisteredProfile?__cimnamespace=root/interop+InstanceID=
218 DCIM:PowerSupply:2.0.0"

219 The key property shall be the InstanceID property.

220 **7.4.2 Operations**

221 The following table lists the operations implemented on CIM_RegisteredProfile .

222 **Table 9 – DCIM_LCRegisteredProfile - Operations**

Operation Name	Requirements	Required Input
Get	Mandatory	Instance URI

Operation Name	Requirements	Required Input
Enumerate	Mandatory	Class URI

223

224 7.4.3 Class Properties

225 The following table lists the implemented properties for DCIM_LCRegisteredProfile instance in a system.
 226 The "Requirements" column shall denote whether the property is implemented (for requirement
 227 definitions, see section 3). The "Additional Requirements" column shall denote either possible values for
 228 the property, or requirements on the value formulation.

229 **Table 10 – DCIM_LCRegisteredProfile**

Property Name	Requirement	Type	Additional Requirements
InstanceID	Mandatory	string	The property value shall be "DCIM:PowerSupply:2.0.0".
RegisteredName	Mandatory	string	This property shall be "Power Supply".
RegisteredVersion	Mandatory	string	This property shall be "2.1.0".
RegisteredOrganization	Mandatory	uint16	This property shall be 1 (Other).
OtherRegisteredOrganization	Mandatory	string	The property value shall be "DCIM".
ProfileRequireLicense[]	Mandatory	String	This property array shall describe the required licenses for this profile. If no license is required for the profile, the property shall have value NULL.
ProfileRequireLicenseStatus[]	Mandatory	String	This property array shall contain the status for the corresponding license in the same element index of the ProfileRequireLicense array property. Each array element shall contain: <ul style="list-style-type: none"> • "LICENSED" • "NOT_LICENSED" If no license is required for the profile, the property shall have value NULL.

230 7.5 DCIM_RegisteredProfile – DMTF Power Supply Profile Profile Registration

231 This section describes the implementation for the DCIM_RegisteredProfile class.

232 This class shall be instantiated in the Interop Namespace.

233 The DCIM_ElementConformsToProfile association shall reference the DCIM_RegisteredProfile instance
 234 and DCIM_PowerSupply instances.

235 7.5.1 Resource URIs for WinRM®

236 The class Resource URI shall be "http://schemas.dell.com/wbem/wscim/1/cim-
 237 schema/2/DCIM_RegisteredProfile?__cimnamespace=root/interop"

238 The instance Resource URI shall be: "http://schemas.dell.com/wbem/wscim/1/cim-
 239 schema/2/DCIM_RegisteredProfile?__cimnamespace=root/interop+InstanceID=
 240 DCIM:PowerSupplyRegisteredProfile:1"

241 The key property shall be the InstanceID property.

242 The DCIM_ElementConformsToProfile association shall reference the DCIM_RegisteredProfile instance.

243 7.5.2 Operations

244 The following table lists the operations implemented on DCIM_RegisteredProfile .

245 **Table 11 – DCIM_RegisteredProfile - Operations**

Operation Name	Requirements	Required Input
Get	Mandatory	Instance URI
Enumerate	Mandatory	Class URI

246 7.5.3 Class Properties

247 The following table lists the implemented properties for DCIM_RegisteredProfile instance in a system.
248 The “Requirements” column shall denote whether the property is implemented (for requirement
249 definitions, see section 3). The “Additional Requirements” column shall denote either possible values for
250 the property, or requirements on the value formulation.

251 **Table 12 – DCIM_RegisteredProfile**

Property Name	Requirement	Type	Additional Requirements
InstanceID	Mandatory	string	The property value shall be “DCIM:PowerSupplyRegisteredProfile:1”.
RegisteredName	Mandatory	string	This property shall be "Power Supply".
RegisteredVersion	Mandatory	string	This property shall be "1.1.0".
RegisteredOrganization	Mandatory	uint16	This property shall be 2 (DMTF).
AdvertisedTypes[]	Mandatory	uint16	This property array shall contain [1(Other), 1 (Other)].
AdvertiseTypeDescriptions[]	Mandatory	string	This property array shall contain ["WS-Identify", "Interop Namespace"].

252 8 Methods

253 No additional details specified.

254 9 Use Cases

255 See *Lifecycle Controller (LC) Integration Best Practices Guide*.

256 10 CIM Elements

257 11 No additional requirements have been defined. Privilege and 258 License Requirement

259 The following table describes the privilege and license requirements for the listed operations. For the
260 detailed explanation of the privileges and licenses, refer to the Dell WSMAN Licenses and Privileges
261 specification.

262 **Table 13 – Privilege and License Requirements**

Class and Method	Operation	User Privilege Required	License Required
DCIM_PowerSupplyView	ENUMERATE,	Login	LM_REMOTE_ASSET_IN

Class and Method	Operation	User Privilege Required	License Required
	GET		VENTORY
DCIM_PowerSupply	ENUMERATE, GET	Login	LM_DEVICE_MONITORING
DCIM_PowerRedundancySet	ENUMERATE, GET	Login	LM_DEVICE_MONITORING
DCIM_PSMemberOfCollection	ENUMERATE, GET	Login	LM_DEVICE_MONITORING
DCIM_PSOwningCollectionElement	ENUMERATE, GET	Login	LM_DEVICE_MONITORING
DCIM_CSHostedPowerRedundancy	ENUMERATE, GET	Login	LM_DEVICE_MONITORING
DCIM_SystemPSDevice	ENUMERATE, GET	Login	LM_DEVICE_MONITORING
DCIM_ElementConformsToProfile	ENUMERATE, GET	Login	None.
DCIM_RegisteredProfile	ENUMERATE, GET	Login	None.
DCIM_LCRegisteredProfile	ENUMERATE, GET	Login	None.
DCIM_LCElementConformsToProfile	ENUMERATE, GET	Login	None.

263
264