


# Inspiron 5405

## Setup and Specifications



## Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

<b>Chapter 1: Set up your Inspiron 5405</b> .....	<b>4</b>
<b>Chapter 2: Views of Inspiron 5405</b> .....	<b>6</b>
Right.....	6
Left.....	6
Top.....	7
Front.....	8
Bottom.....	9
<b>Chapter 3: Specifications of Inspiron 5405</b> .....	<b>10</b>
Dimensions and weight.....	10
Processor.....	10
Chipset.....	11
Operating system.....	11
Memory.....	11
External ports.....	12
Internal slots.....	12
Wireless module.....	12
Audio.....	13
Storage.....	13
Media-card reader.....	14
Keyboard.....	14
Camera.....	15
Touchpad.....	15
Power adapter.....	15
Battery.....	16
Display.....	17
Fingerprint reader (optional).....	18
GPU—Integrated.....	18
Operating and storage environment.....	18
<b>Chapter 4: Keyboard shortcuts</b> .....	<b>19</b>
<b>Chapter 5: Getting help and contacting Dell</b> .....	<b>21</b>

# Set up your Inspiron 5405

## About this task

**NOTE:** The images in this document may differ from your computer depending on the configuration you ordered.

## Steps

1. Connect the power adapter and press the power button.



**NOTE:** The battery may go into power-saving mode during shipment to conserve charge on the battery. Ensure that the power adapter is connected to your computer when it is turned on for the first time.


2. Finish Windows setup.

Follow the on-screen instructions to complete the setup. When setting up, Dell recommends that you:





- Connect to a network for Windows updates.
  - NOTE:** If connecting to a secured wireless network, enter the password for the wireless network access when prompted.
- If connected to the Internet, sign in with or create a Microsoft account. If not connected to the Internet, create an offline account.
- On the **Support and Protection** screen, enter your contact details.

3. Locate and use Dell apps from the Windows Start menu—Recommended.

**Table 1. Locate Dell apps**

Resources	Description
	<p><b>My Dell</b></p> <p>Centralized location for key Dell applications, help articles, and other important information about your computer. It also notifies you about the warranty status, recommended accessories, and software updates if available.</p>

**Table 1. Locate Dell apps (continued)**

Resources	Description
	<p><b>SupportAssist</b></p> <p>SupportAssist proactively and predictively identifies hardware and software issues on your computer and automates the engagement process with Dell Technical support. It addresses performance and stabilization issues, prevents security threats, monitors, and detects hardware failures. For more information, see <i>SupportAssist for Home PCs User's Guide</i> at <a href="http://www.dell.com/serviceabilitytools">www.dell.com/serviceabilitytools</a>. Click <b>SupportAssist</b> and then, click <b>SupportAssist for Home PCs</b>.</p> <p> <b>NOTE:</b> In SupportAssist, click the warranty expiry date to renew or upgrade your warranty.</p>
	<p><b>Dell Update</b></p> <p>Updates your computer with critical fixes and latest device drivers as they become available. For more information about using Dell Update, see the knowledge base article <a href="http://www.dell.com/support">000149088</a> at <a href="http://www.dell.com/support">www.dell.com/support</a>.</p>
	<p><b>Dell Digital Delivery</b></p> <p>Download software applications, which are purchased but not preinstalled on your computer. For more information about using Dell Digital Delivery, see the knowledge base article <a href="http://www.dell.com/support">000129837</a> at <a href="http://www.dell.com/support">www.dell.com/support</a>.</p>

## Views of Inspiron 5405

### Right



#### 1. microSD-card slot

Reads from and writes to the microSD-card. The computer supports the following card types:

- micro-Secure Digital (mSD)
- micro-Secure Digital High Capacity (mSDHC)
- micro-Secure Digital Extended Capacity (mSDXC)

#### 2. USB 3.2 Gen 1 port

Connect devices such as external storage devices and printers. Provides data transfer speeds up to 5 Gbps.

#### 3. Headset port

Connect headphones or a headset (headphone and microphone combo).

### Left



#### 1. Power-adaptor port

Connect a power adapter to provide power to your computer and charge the battery.

#### 2. Power and battery-status light

Indicates the power state and battery state of the computer.

Solid white—Power adapter is connected and the battery is charging.

Solid amber—Battery charge is low or critical.

Off—Battery is fully charged.

**NOTE:** On certain computer models, the power and battery-status light are also used for diagnostics. For more information, see the *Troubleshooting* section in your computer's *Service Manual*.

#### 3. HDMI port

Connect to a TV, external display or another HDMI-in enabled device. Provides video and audio output.

#### 4. USB 3.2 Gen 1 port

Connect devices such as external storage devices and printers. Provides data transfer speeds up to 5 Gbps.


### 5. USB 3.2 Gen 1 (Type-C) port with Power Delivery/DisplayPort

Connect devices such as external storage devices, printers, and external displays.

Supports Power Delivery that enables two-way power supply between devices. Provides up to 7.5 W power output that enables faster charging.

**NOTE:** A USB Type-C to DisplayPort adapter (sold separately) is required to connect a DisplayPort device.

## Top

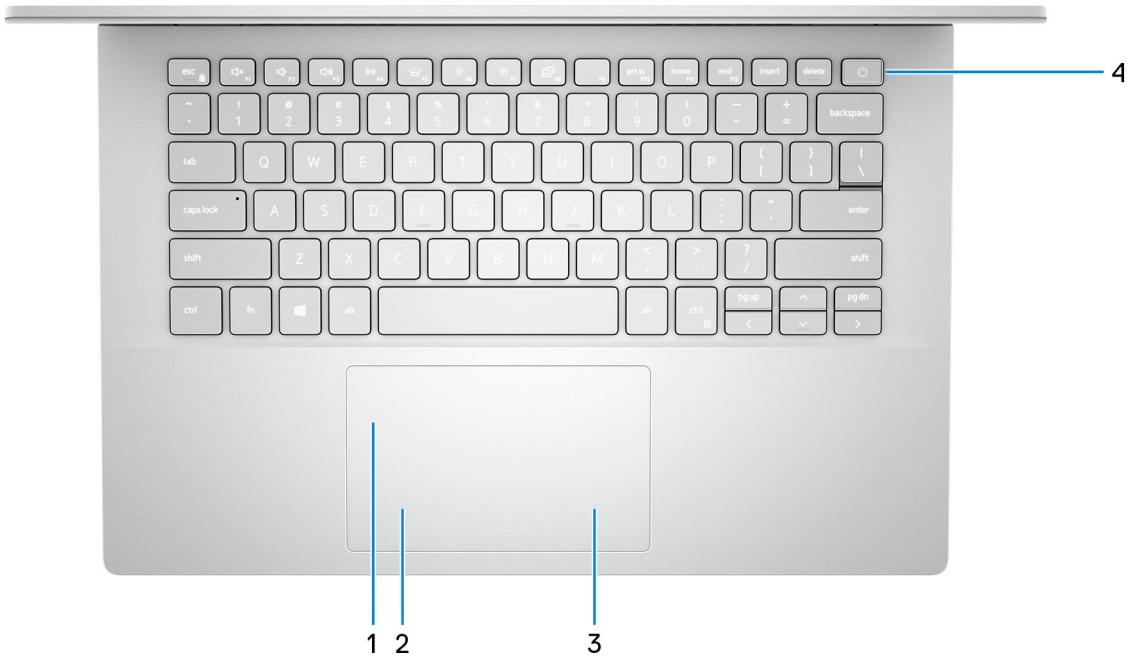

#### 1. Touchpad

Move your finger on the touchpad to move the mouse pointer. Tap to left-click and two fingers tap to right-click.

#### 2. Left-click area

Press to left-click.

#### 3. Right-click area

Press to right-click.

#### 4. Power button with optional fingerprint reader


Press to turn on the computer if it is turned off, in sleep state, or in hibernate state.

When the computer is turned on, press the power button to put the computer into sleep state; press and hold the power button for 4 seconds to force shut-down the computer.

If the power button has a fingerprint reader, place your finger on the power button to log in.

**NOTE:** You can customize power-button behavior in Windows. For more information, see *Me and My Dell* at [www.dell.com/support/manuals](http://www.dell.com/support/manuals).

# Front

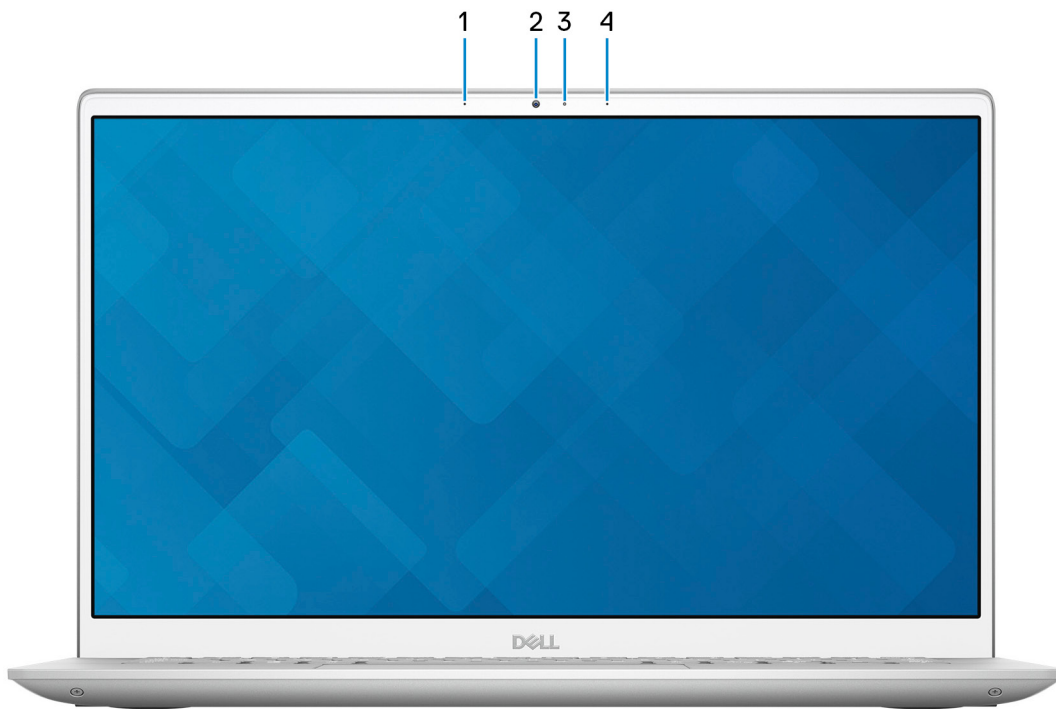

- 1. Left microphone**  
Provides digital sound input for audio recording and voice calls.
- 2. Camera**  
Enables you to video chat, capture photos, and record videos.
- 3. Camera-status light**  
Turns on when the camera is in use.
- 4. Right microphone**  
Provides digital sound input for audio recording and voice calls.

# Bottom



**1. Left speaker**

Provides audio output.

**2. Service Tag label**

The Service Tag is a unique alphanumeric identifier that enables Dell service technicians to identify the hardware components in your computer and access warranty information.

**3. Right speaker**


Provides audio output.

# Specifications of Inspiron 5405

## Dimensions and weight

The following table lists the height, width, depth, and weight of your Inspiron 5405.

**Table 2. Dimensions and weight**

Description	Values
Height:	
Front height	16.74 mm (0.66 in.)
Rear height	17.90 mm (0.70 in.)
Width	321.30 mm (12.65 in.)
Depth	216.20 mm (8.51 in.)
Weight (maximum)	1.40 kg (3.09 lb)  <b>NOTE:</b> The weight of your computer depends on the configuration ordered and manufacturing variability.

## Processor

The following table lists the details of the processors supported by your Inspiron 5405.

**Table 3. Processor**

Description	Option one	Option two	Option three
Processor type	AMD Ryzen 3 4300U	AMD Ryzen 5 4500U	AMD Ryzen 7 4700U
Processor wattage	15 W	15 W	15 W
Processor core count	4	6	8
Processor thread count	4	6	8
Processor speed	Up to 3.80 GHz	Up to 4 GHz	Up to 4.20 GHz
Processor cache	4 MB	8 MB	8 MB
Integrated graphics	AMD Radeon Graphics	AMD Radeon Graphics	AMD Radeon Graphics

# Chipset

The following table lists the details of the chipset supported by your Inspiron 5405.

**Table 4. Chipset**

Description	Values
Chipset	Integrated in the processor
Processor	AMD Ryzen 3/5/7
DRAM bus width	64-bit
Flash EPROM	16 MB
PCIe bus	Up to Gen3

# Operating system

Your Inspiron 5405 supports the following operating systems:

- Windows 11 Home, 64-bit
- Windows 11 Home National Academic, 64-bit
- Windows 11 Home in S-mode, 64-bit
- Windows 11 Pro, 64-bit
- Windows 11 Pro National Academic, 64-bit
- Windows 10 Pro, 64-bit
- Windows 10 Home, 64-bit
- Windows 10 Home in S-mode, 64-bit

# Memory

The following table lists the memory specifications of your Inspiron 5405.

**Table 5. Memory specifications**

Description	Values
Memory slots	Two-SODIMM slots
Memory type	DDR4
Memory speed	3200 MHz
Maximum memory configuration	32 GB
Minimum memory configuration	4 GB
Memory size per slot	4 GB, 8 GB, 16 GB
Memory configurations supported	<ul style="list-style-type: none"><li>• 4 GB, 1 x 4 GB, DDR4, 3200 MHz</li><li>• 8 GB, 1 x 8 GB, DDR4, 3200 MHz</li><li>• 8 GB, 2 x 4 GB, DDR4, 3200 MHz, dual-channel</li><li>• 12 GB, 1 x 4 GB + 1 x 8 GB, DDR4, 3200 MHz</li><li>• 16 GB, 1 x 16 GB, DDR4, 3200 MHz</li><li>• 16 GB, 2 x 8 GB, DDR4, 3200 MHz, dual-channel</li></ul>

**Table 5. Memory specifications (continued)**

Description	Values
	<ul style="list-style-type: none"> <li>32 GB, 2 x 16 GB, DDR4, 3200 MHz, dual-channel</li> </ul>

## External ports

The following table lists the external ports on your Inspiron 5405.


**Table 6. External ports**

Description	Values
USB ports	<ul style="list-style-type: none"> <li>Two USB 3.2 Gen 1 ports</li> <li>One USB 3.2 Gen 1 (Type-C) port with Power Delivery/ DisplayPort</li> </ul>
Audio port	One headset (headphone and microphone combo) port
Video port/ports	One HDMI 1.4b port
Media-card reader	One microSD-card reader
Power-adaptor port	One 4.5 mm x 2.9 mm DC-in
Security-cable slot	Not supported

## Internal slots

The following table lists the internal slots of your Inspiron 5405.

**Table 7. Internal slots**

Description	Values
M.2	<ul style="list-style-type: none"> <li>One M.2 2230 slot for WiFi and Bluetooth combo card</li> <li>Two M.2 2230/2280 slots for solid-state drive</li> </ul> <p> <b>NOTE:</b> To learn more about the features of different types of M.2 cards, search in the Knowledge Base Resource at <a href="http://www.dell.com/support">www.dell.com/support</a>.</p>

## Wireless module

The following table lists the Wireless Local Area Network (WLAN) module specifications of your Inspiron 5405.

**Table 8. Wireless module specifications**

Description	Option one	Option two	Option three
Model number	Qualcomm QCA9377 (DW1810)	Qualcomm QCA61x4A (DW1820)	Intel Wi-Fi 6 AX200
Transfer rate	Up to 433 Mbps	Up to 867 Mbps	Up to 2400 Mbps
Frequency bands supported	2.4 GHz/5 GHz	2.4 GHz/5 GHz	2.4 GHz/5 GHz

**Table 8. Wireless module specifications (continued)**

Description	Option one	Option two	Option three
Wireless standards	<ul style="list-style-type: none"> <li>• WiFi 802.11a/b/g</li> <li>• Wi-Fi 4 (WiFi 802.11n)</li> <li>• Wi-Fi 5 (WiFi 802.11ac)</li> </ul>	<ul style="list-style-type: none"> <li>• WiFi 802.11a/b/g</li> <li>• Wi-Fi 4 (WiFi 802.11n)</li> <li>• Wi-Fi 5 (WiFi 802.11ac)</li> </ul>	<ul style="list-style-type: none"> <li>• WiFi 802.11a/b/g</li> <li>• Wi-Fi 4 (WiFi 802.11n)</li> <li>• Wi-Fi 5 (WiFi 802.11ac)</li> <li>• Wi-Fi 6 (WiFi 802.11ax)</li> </ul>
Encryption	<ul style="list-style-type: none"> <li>• 64-bit/128-bit WEP</li> <li>• AES-CCMP</li> <li>• TKIP</li> </ul>	<ul style="list-style-type: none"> <li>• 64-bit/128-bit WEP</li> <li>• AES-CCMP</li> <li>• TKIP</li> </ul>	<ul style="list-style-type: none"> <li>• 64-bit/128-bit WEP</li> <li>• AES-CCMP</li> <li>• TKIP</li> </ul>
Bluetooth	Bluetooth 5.0	Bluetooth 5.0	Bluetooth 5.1

## Audio

The following table lists the audio specifications of your Inspiron 5405.

**Table 9. Audio specifications**

Description	Values	
Audio controller	Realtek ALC3204	
Stereo conversion	Supported	
Internal audio interface	High-Definition Audio (HDA)	
External audio interface	Universal audio jack	
Number of speakers	Two	
Internal-speaker amplifier	Supported (audio codec integrated)	
External volume controls	Keyboard shortcut controls	
Speaker output:		
	Average speaker output	2 W
	Peak speaker output	2.5 W
Subwoofer output	Not supported	
Microphone	Dual-array microphones	

## Storage

This section lists the storage options on your Inspiron 5405.

Your Inspiron 5405 supports one of the following storage configurations:

- One M.2 2230/2280 solid-state drive
- A combination of two M.2 solid-state drives of the following form factors 2230/2280

The primary drive of your Inspiron 5405 varies with the storage configuration. For computers with an M.2 solid-state drive, the M.2 solid-state drive is the primary drive.

**NOTE:** If there is only one solid-state drive in the configuration you ordered, you can install another solid-state drive in the other M.2 slot. However, you may need a solid-state drive bracket (sold separately; please contact Dell support) to install the additional solid-state drive.


**Table 10. Storage specifications**

Storage type	Interface type	Capacity
M.2 2230 solid-state drive	PCIe Gen3.0x4 NVMe, up to 32 Gbps	Up to 512 GB
M.2 2280 solid-state drive	PCIe Gen3.0x4 NVMe, up to 32 Gbps	Up to 2 TB

## Media-card reader

The following table lists the media cards supported by your Inspiron 5405.


**Table 11. Media-card reader specifications**

Description	Values
Media-card type	One microSD-card reader
Media-cards supported	<ul style="list-style-type: none"> <li>• micro-Secure Digital (mSD)</li> <li>• micro-Secure Digital High Capacity (mSDHC)</li> <li>• micro-Secure Digital Extended Capacity (mSDXC)</li> </ul>
<p> <b>NOTE:</b> The maximum capacity supported by the media-card reader varies depending on the standard of the media card installed in your computer.</p>	

## Keyboard

The following table lists the keyboard specifications of your Inspiron 5405.

**Table 12. Keyboard specifications**

Description	Values
Keyboard type	<ul style="list-style-type: none"> <li>• Standard keyboard</li> <li>• Standard backlit keyboard</li> </ul>
Keyboard layout	QWERTY
Number of keys	<ul style="list-style-type: none"> <li>• United States and Canada: 81 keys</li> <li>• United Kingdom: 82 keys</li> <li>• Japan: 85 keys</li> </ul>
Keyboard size	<p>X=18.70 mm key pitch</p> <p>Y=18.05 mm key pitch</p>
Keyboard shortcuts	<p>Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. To type the alternate character, press Shift and the desired key. To perform secondary functions, press Fn and the desired key.</p> <p> <b>NOTE:</b> You can define the primary behavior of the function keys (F1–F12) changing <b>Function Key Behavior</b> in BIOS setup program.</p> <p>For more information, see <a href="#">Keyboard shortcuts</a>.</p>

# Camera

The following table lists the camera specifications of your Inspiron 5405.

**Table 13. Camera specifications**

Description		Values
Number of cameras		One
Camera type		HD RGB camera
Camera location		Front camera
Camera sensor type		CMOS sensor technology
Camera resolution:		
	Still image	0.92 megapixel
	Video	1280 x 720 (HD) at 30 fps
Diagonal viewing angle:		74.9 degrees

# Touchpad

The following table lists the touchpad specifications of your Inspiron 5405.

**Table 14. Touchpad specifications**

Description		Values
Touchpad resolution:		
	Horizontal	1920
	Vertical	1080
Touchpad dimensions:		
	Horizontal	115 mm (4.53 in.)
	Vertical	70 mm (2.76 in.)
Touchpad gestures		For more information about touchpad gestures available on Windows, see the Microsoft knowledge base article <a href="https://support.microsoft.com">4027871</a> at <a href="https://support.microsoft.com">support.microsoft.com</a> .


# Power adapter

The following table lists the power adapter specifications of your Inspiron 5405.

**Table 15. Power adapter specifications**

Description	Option one	Option two
Type	E4 45 W	E4 65 W
Connector dimensions:		
	External diameter	4.50 mm



**Table 15. Power adapter specifications (continued)**

Description		Option one	Option two
	Internal diameter	2.90 mm	2.90 mm
Input voltage		110 VAC–240 VAC	110 VAC–240 VAC
Input frequency		50 Hz–60 Hz	50 Hz–60 Hz
Input current (maximum)		1.30 A	1.50 A
Output current (continuous)		2.31 A	3.34 A
Rated output voltage		19.50 VDC	19.50 VDC
Temperature range:			
	Operating	0°C to 40°C (32°F to 104°F)	0°C to 40°C (32°F to 104°F)
	Storage	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)
 <b>CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.</b>			

## Battery

The following table lists the battery specifications of your Inspiron 5405.

**Table 16. Battery specifications**

Description		Option one	Option two
Battery type		3-cell, 40 WHr polymer battery	4-cell, 53 WHr polymer battery
Battery voltage		11.40 VDC	15.20 VDC
Battery weight (maximum)		0.18 kg (0.40 lb)	0.24 kg (0.53 lb)
Battery dimensions:			
	Height	184.10 mm (7.25 in.)	239.10 mm (9.41 in.)
	Width	90.73 mm (3.57 in.)	90.73 mm (3.57 in.)
	Depth	5.75 mm (0.23 in.)	5.75 mm (0.23 in.)
Temperature range:			
	Operating	0°C to 35°C (32°F to 95°F)	0°C to 35°C (32°F to 95°F)
	Storage	-40°C to 65°C (-40°F to 149°F)	-40°C to 65°C (-40°F to 149°F)
Battery operating time		Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.
Battery charging time (approximate)		4 hours (when the computer is off)  <b>NOTE:</b> Control the charging time, duration, start and end time, and so on using the Dell Power Manager	4 hours (when the computer is off)  <b>NOTE:</b> Control the charging time, duration, start and end time, and so on using the Dell Power Manager

**Table 16. Battery specifications (continued)**

Description	Option one	Option two
	application. For more information on the Dell Power Manager see, <i>Me and My Dell</i> on <a href="http://www.dell.com">www.dell.com</a> .	application. For more information on the Dell Power Manager see, <i>Me and My Dell</i> on <a href="http://www.dell.com">www.dell.com</a> .
Coin-cell battery	CR2032	CR2032

## Display

The following table lists the display specifications of your Inspiron 5405.

**Table 17. Display specifications**

Description	Option one	Option two
Display type	Full High Definition (FHD)	Full High Definition (FHD)
Display-panel technology	Wide-Viewing Angle (WVA)	Wide-Viewing Angle (WVA)
Display-panel dimensions (active area):		
	Height	173.99 mm (6.85 in.)
	Width	309.35 mm (12.18 in.)
	Diagonal	354.93 mm (13.97 in.)
Display-panel native resolution	1920 x 1080	1920 x 1080
Luminance (typical)	220 nits	300 nits
Megapixels	2.07	2.07
Color gamut	45% (NTSC)	72% (NTSC)
Pixels Per Inch (PPI)	157	157
Contrast ratio (min.)	500:1	600:1
Response time (max.)	35 ms	35 ms
Refresh rate	60 Hz	60 Hz
Horizontal view angle	80 +/- degrees	80 +/- degrees
Vertical view angle	80 +/- degrees	80 +/- degrees
Pixel pitch	0.16 mm	0.16 mm
Power consumption (maximum)	3.50 W	4.50 W
Anti-glare vs glossy finish	Anti-glare	Anti-glare
Touch options	No	No

## Fingerprint reader (optional)

The following table lists the specifications of the optional fingerprint-reader of your Inspiron 5405.

**Table 18. Fingerprint reader specifications**

Description	Values
Fingerprint-reader sensor technology	Capacitive
Fingerprint-reader sensor resolution	500 dpi
Fingerprint-reader sensor pixel size	108 x 88

## GPU—Integrated

The following table lists the specifications of the integrated Graphics Processing Unit (GPU) supported by your Inspiron 5405.

**Table 19. GPU—Integrated**


Controller	External display support	Memory size	Processor
AMD Radeon Graphics	<ul style="list-style-type: none"> <li>One HDMI 1.4b port</li> <li>One USB 3.2 Gen 1 (Type-C) port with Power Delivery/DisplayPort</li> </ul>	Shared system memory	AMD Ryzen 3/5/7

## Operating and storage environment

This table lists the operating and storage specifications of your Inspiron 5405.

**Airborne contaminant level:** G1 as defined by ISA-S71.04-1985

**Table 20. Computer environment**

Description	Operating	Storage
Temperature range	0°C to 35°C (32°F to 95°F)	-40°C to 65°C (-40°F to 149°F)
Relative humidity (maximum)	10% to 90% (non-condensing)	0% to 95% (non-condensing)
Vibration (maximum)*	0.66 GRMS	1.30 GRMS
Shock (maximum)	110 G†	160 G†
Altitude range	-15.2 m to 3048 m (-49.87 ft to 10000 ft)	-15.2 m to 10668 m (-49.87 ft to 35000 ft)
 <b>CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.</b>		

\* Measured using a random vibration spectrum that simulates user environment.

† Measured using a 2 ms half-sine pulse when the hard drive is in use.

## Keyboard shortcuts

**NOTE:** Keyboard characters may differ depending on the keyboard language configuration. Keys used for shortcuts remain the same across all language configurations.

Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. The symbol shown on the lower part of the key refers to the character that is typed out when the key is pressed. If you press shift and the key, the symbol shown on the upper part of the key is typed out. For example, if you press **2**, **2** is typed out; if you press **Shift + 2**, **@** is typed out.

The keys F1-F12 at the top row of the keyboard are function keys for multi-media control, as indicated by the icon at the bottom of the key. Press the function key to invoke the task represented by the icon. For example, pressing F1 mutes the audio (refer to the table below).

However, if the function keys F1-F12 are needed for specific software applications, multi-media functionality can be disabled by pressing **fn + Esc**. Subsequently, multi-media control can be invoked by pressing **fn** and the respective function key. For example, mute audio by pressing **fn + F1**.

**NOTE:** You can also define the primary behavior of the function keys (F1–F12) by changing **Function Key Behavior** in BIOS setup program.

**Table 21. List of keyboard shortcuts**

Function key	Redefined key (for multimedia control)	Behavior
F1	fn + F1	Mute audio
F2	fn + F2	Decrease volume
F3	fn + F3	Increase volume
F4	fn + F4	Play/Pause
F5	fn + F5	Toggle keyboard backlight (optional) <b>NOTE:</b> Non-backlight keyboards have F5 function key without the backlight icon and does not support toggle keyboard backlight function.
F6	fn + F6	Decrease brightness
F7	fn + F7	Increase brightness
F8	fn + F8	Switch to external display
F10	fn + F10	Print screen
F11	fn + F11	Home
F12	fn + F12	End

The **fn** key is also used with selected keys on the keyboard to invoke other secondary functions.

**Table 22. List of keyboard shortcuts**

Function key	Behavior
fn + B	Pause/Break
fn + S	Toggle scroll lock

**Table 22. List of keyboard shortcuts (continued)**



<b>Function key</b>	<b>Behavior</b>
fn + R	System request
fn + ctrl	Open application menu
fn + esc	Toggle fn-key lock
fn + spacebar	Emoji
fn + T	Turn on/off <b>Ultra performance mode</b>
fn + pg up	Page up
fn + pg dn	Page down

# Getting help and contacting Dell

## Self-help resources


You can get information and help on Dell products and services using these self-help resources:


**Table 23. Self-help resources**

Self-help resources	Resource location
Information about Dell products and services	<a href="http://www.dell.com">www.dell.com</a>
My Dell app	
Tips	
Contact Support	In Windows search, type <code>Contact Support</code> , and press Enter.
Online help for operating system	<a href="http://www.dell.com/support/windows">www.dell.com/support/windows</a>
Access top solutions, diagnostics, drivers and downloads, and learn more about your computer through videos, manuals and documents.	Your Dell computer is uniquely identified by a Service Tag or Express Service Code. To view relevant support resources for your Dell computer, enter the Service Tag or Express Service Code at <a href="http://www.dell.com/support">www.dell.com/support</a> .  For more information on how to find the Service Tag for your computer, see <a href="#">Locate the Service Tag on your computer</a> .
Dell knowledge base articles for a variety of computer concerns	<ol style="list-style-type: none"> <li>1. Go to <a href="http://www.dell.com/support">www.dell.com/support</a>.</li> <li>2. On the menu bar at the top of the Support page, select <b>Support &gt; Knowledge Base</b>.</li> <li>3. In the Search field on the Knowledge Base page, type the keyword, topic, or model number, and then click or tap the search icon to view the related articles.</li> </ol>

## Contacting Dell

To contact Dell for sales, technical support, or customer service issues, see [www.dell.com/contactdell](http://www.dell.com/contactdell).

 **NOTE:** Availability varies by country/region and product, and some services may not be available in your country/region.

 **NOTE:** If you do not have an active Internet connection, you can find contact information about your purchase invoice, packing slip, bill, or Dell product catalog.