

# Inspiron 7506 2-in-1 Silver

## Setup and Specifications



## Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.


 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

<b>Chapter 1: Set up your Inspiron 7506 2-in-1 Silver</b>	<b>4</b>
<b>Chapter 2: Views of Inspiron 7506 2-in-1 Silver</b>	<b>6</b>
Right	6
Left	6
Base	7
Display	8
Bottom	9
Modes	9
<b>Chapter 3: Using the privacy shutter</b>	<b>11</b>
<b>Chapter 4: Specifications of Inspiron 7506 2-in-1 Silver</b>	<b>12</b>
Dimensions and weight	12
Processor	12
Chipset	13
Operating system	13
Memory	13
External ports	14
Internal slots	14
Wireless module	14
Audio	15
Storage	15
Intel Optane Memory H10 with solid-state storage (optional)	16
Media-card reader	16
Keyboard	17
Camera	17
Touchpad	18
Power adapter	18
Battery	19
Display	19
Fingerprint reader	20
GPU—Discrete	20
Operating and storage environment	21
<b>Chapter 5: Keyboard shortcuts</b>	<b>22</b>
<b>Chapter 6: Getting help and contacting Dell</b>	<b>24</b>

# Set up your Inspiron 7506 2-in-1 Silver

**NOTE:** The images in this document may differ from your computer depending on the configuration you ordered.

1. Connect the power adapter and press the power button.

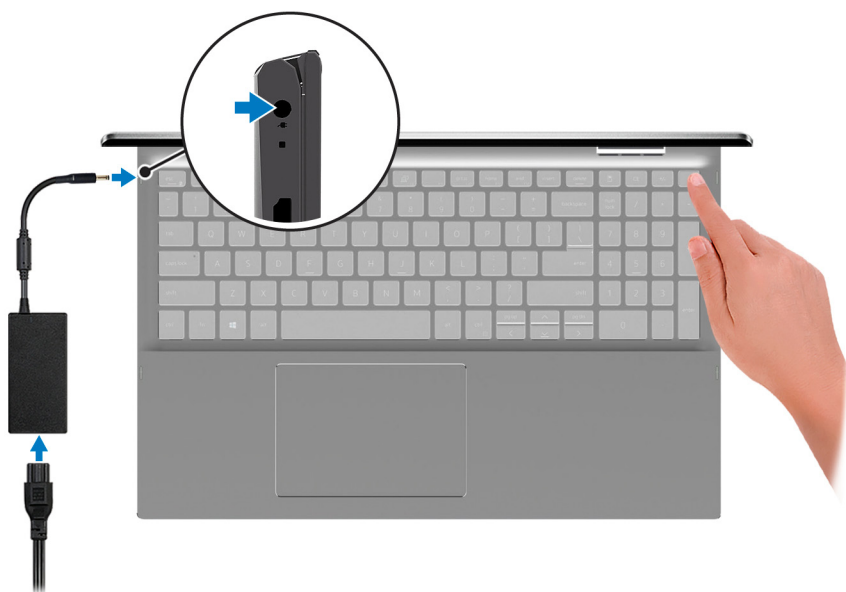

**NOTE:** The battery may go into power-saving mode during shipment to conserve charge on the battery. Ensure that the power adapter is connected to your computer when it is turned on for the first time.


2. Finish Windows setup.

Follow the on-screen instructions to complete the setup. When setting up, Dell recommends that you:





- Connect to a network for Windows updates.
  - NOTE:** If connecting to a secured wireless network, enter the password for the wireless network access when prompted.
- If connected to the Internet, sign in with or create a Microsoft account. If not connected to the Internet, create an offline account.
- On the **Support and Protection** screen, enter your contact details.

3. Locate and use Dell apps from the Windows Start menu—Recommended.

**Table 1. Locate Dell apps**

Resources	Description
	<p><b>My Dell</b></p> <p>Centralized location for key Dell applications, help articles, and other important information about your computer. It also notifies you about the warranty status, recommended accessories, and software updates if available.</p>

**Table 1. Locate Dell apps (continued)**

Resources	Description
	<p><b>SupportAssist</b></p> <p>SupportAssist proactively and predictively identifies hardware and software issues on your computer and automates the engagement process with Dell Technical support. It addresses performance and stabilization issues, prevents security threats, monitors, and detects hardware failures. For more information, see <i>SupportAssist for Home PCs User's Guide</i> at <a href="http://www.dell.com/serviceabilitytools">www.dell.com/serviceabilitytools</a>. Click <b>SupportAssist</b> and then, click <b>SupportAssist for Home PCs</b>.</p> <p> <b>NOTE:</b> In SupportAssist, click the warranty expiry date to renew or upgrade your warranty.</p>
	<p><b>Dell Update</b></p> <p>Updates your computer with critical fixes and latest device drivers as they become available. For more information about using Dell Update, see the knowledge base article <a href="https://www.dell.com/support/000149088">000149088</a> at <a href="http://www.dell.com/support">www.dell.com/support</a>.</p>
	<p><b>Dell Digital Delivery</b></p> <p>Download software applications, which are purchased but not preinstalled on your computer. For more information about using Dell Digital Delivery, see the knowledge base article <a href="https://www.dell.com/support/000129837">000129837</a> at <a href="http://www.dell.com/support">www.dell.com/support</a>.</p>

# Views of Inspiron 7506 2-in-1 Silver

## Right



### 1. SD-card slot

Reads from and writes to the SD card. The computer supports the following card types:

- Secure Digital (SD)
- Secure Digital High Capacity (SDHC)
- Secure Digital Extended Capacity (SDXC)

### 2. USB 3.2 Gen 1 port

Connect peripherals such as external storage devices and printers. Provides data transfer speeds up to 5 Gbps.

### 3. Headset port

Connect headphones or a headset (headphone and microphone combo).

## Left



### 1. Power-adaptor port

Connect a power adapter to provide power to your computer.

### 2. Power and battery-status light

Indicates the power state and battery state of the computer.

Solid white—Power adapter is connected and the battery is charging.

Solid amber—Battery charge is low or critical.

Off—Battery is fully charged.

### 3. HDMI port

Connect to a TV, external display or another HDMI-in enabled device. Provides video and audio output.

### 4. USB 3.2 Gen 1 port

Connect peripherals such as external storage devices and printers. Provides data transfer speeds up to 5 Gbps.

## 5. Thunderbolt 4 USB Type-C port with Power Delivery


Thunderbolt 4 enables you to connect to an external display using a display adapter. Provides data transfer rates of up to 40 Gbps. Supports Power Delivery that enables two-way power supply between devices. Provides up to 5 V/3 A power output that enables faster charging.

**NOTE:** You can connect a Dell Docking Station to the Thunderbolt 4 ports. For more information, see the knowledge base article [000124295](https://www.dell.com/support/000124295) at [www.dell.com/support](https://www.dell.com/support).

**NOTE:** A USB Type-C to DisplayPort adapter (sold separately) is required to connect a DisplayPort device.

**NOTE:** Connecting a USB Type-C power adapter to this port provides power to your computer and also charges the battery.

## Base

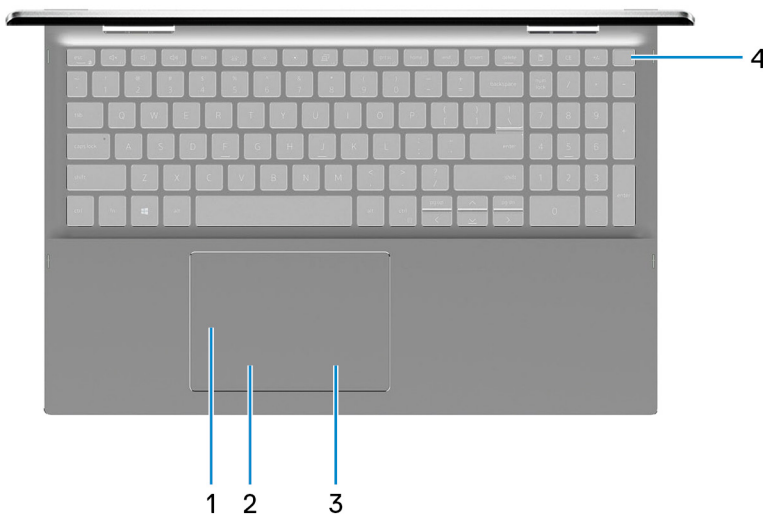

### 1. Touchpad

Move your finger on the touchpad to move the mouse pointer. Tap to left-click and two fingers tap to right-click.

### 2. Left-click area

Press to left-click.

### 3. Right-click area

Press to right-click.

### 4. Power button with fingerprint reader


Press to turn on the computer if it is turned off, in sleep state, or in hibernate state.

When the computer is turned on, press the power button to put the computer into sleep state; press and hold the power button for 10 seconds to force shut-down the computer.

Place your finger on the power button to log in with the fingerprint reader.

**NOTE:** You can customize power-button behavior in Windows. For more information, see *Me and My Dell* at [www.dell.com/support/manuals](https://www.dell.com/support/manuals).

# Display

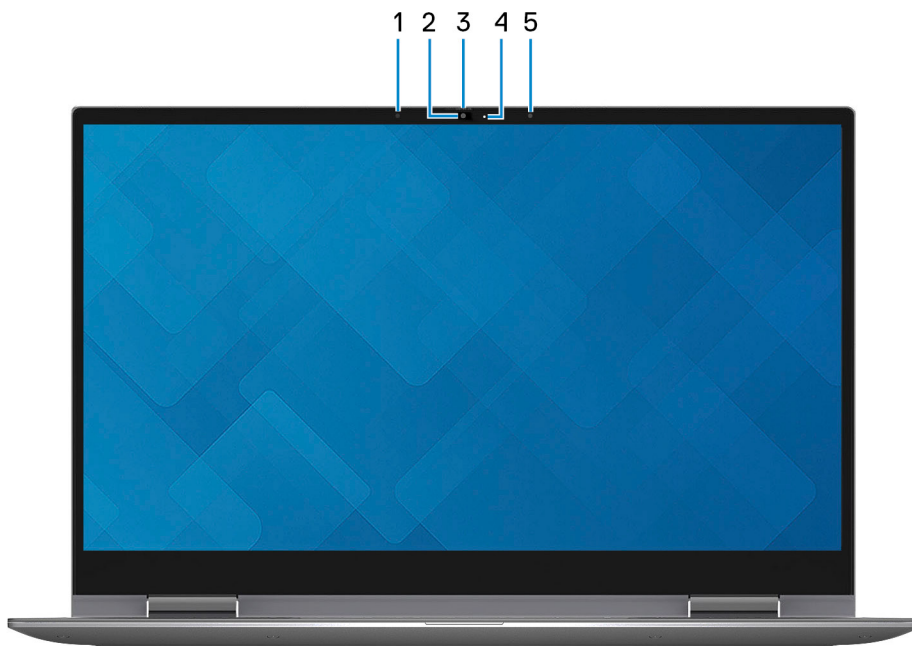

**1. Left microphone**

Provides digital sound input for audio recording and voice calls.

**2. Camera**

Enables you to video chat, capture photos, and record videos.

**3. Privacy shutter**

Slide the privacy shutter to cover the camera lens and protect your privacy when the camera is not in use.

**4. Camera-status light**


Turns on when the camera is in use.

**5. Right microphone**

Provides digital sound input for audio recording and voice calls.



## Bottom

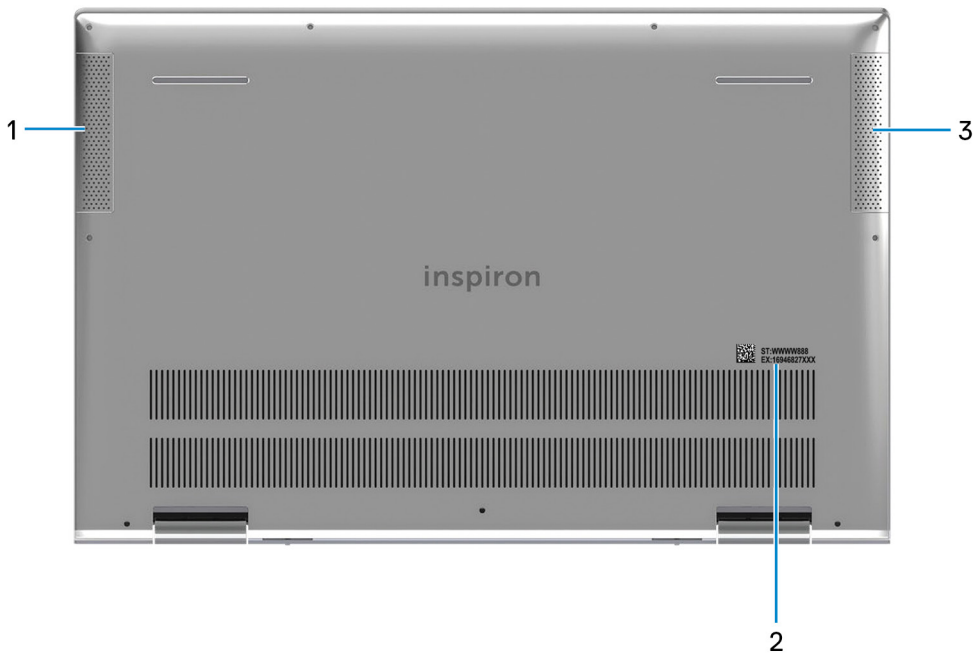

### 1. Left speaker

Provides audio output.

### 2. Service Tag label

The Service Tag is a unique alphanumeric identifier that enables Dell service technicians to identify the hardware components in your computer and access warranty information.

### 3. Right speaker

Provides audio output.

## Modes

### Notebook



Tablet




Stand



Tent



## Using the privacy shutter

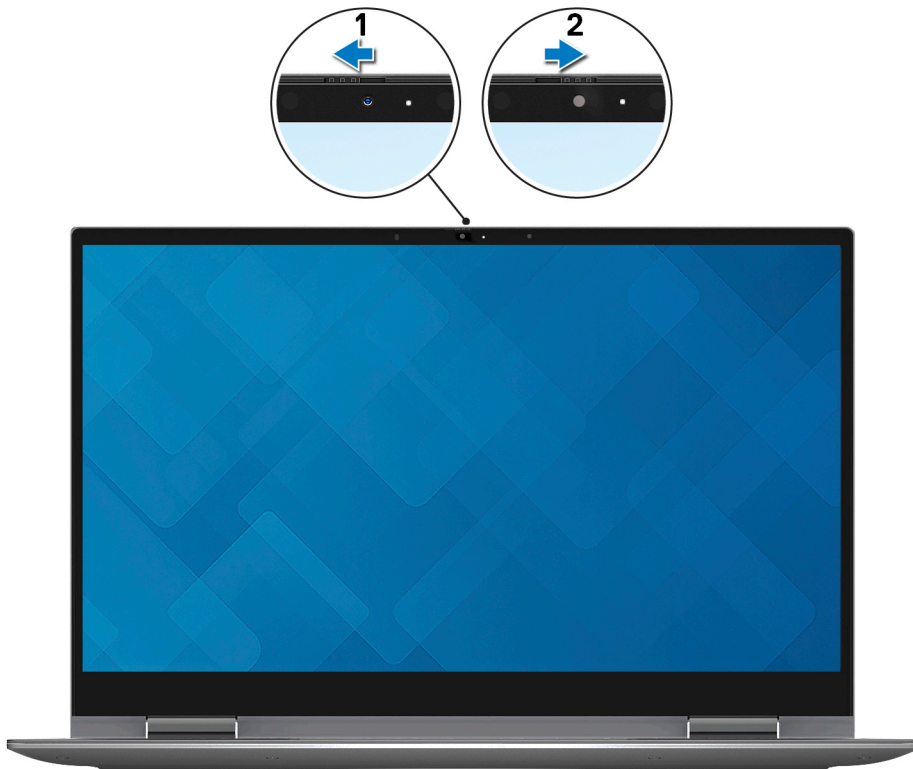


1. Slide the privacy shutter to the left to access the camera lens.
2. Slide the privacy shutter to the right to cover the camera lens.

# Specifications of Inspiron 7506 2-in-1 Silver

## Dimensions and weight

The following table lists the height, width, depth, and weight of your Inspiron 7506 2-in-1 Silver.

**Table 2. Dimensions and weight**

Description	Values
Height:	
Front height	16.40 mm (0.65 in.)
Rear height	17.94 mm (0.71 in.)
Width	356.20 mm (14.02 in.)
Depth	238.40 mm (9.39 in.)
Weight (maximum)	1.90 kg (4.19 lb)
	 <b>NOTE:</b> The weight of your computer depends on the configuration ordered and manufacturing variability.

## Processor

The following table lists the details of the processors supported by your Inspiron 7506 2-in-1 Silver.

**Table 3. Processor**

Description	Option one	Option two
Processor type	11 <sup>th</sup> Generation Intel Core i5-1135G7	11 <sup>th</sup> Generation Intel Core i7-1165G7
Processor wattage	28 W	28 W
Processor core count	4	4
Processor thread count	8	8
Processor speed	Up to 4.2 GHz	Up to 4.7 GHz
Processor cache	8 MB	12 MB
Integrated graphics	Intel Iris Xe Graphics	Intel Iris Xe Graphics

# Chipset

The following table lists the details of the chipset supported by your Inspiron 7506 2-in-1 Silver.

**Table 4. Chipset**

Description	Values
Chipset	Integrated in the processor
Processor	11 <sup>th</sup> Generation Intel Core i5/i7
DRAM bus width	64-bit
Flash EPROM	16+8 MB
PCIe bus	Up to Gen3

# Operating system

Your Inspiron 7506 2-in-1 Silver supports the following operating systems:

- Windows 11 Home, 64-bit
- Windows 11 Pro, 64-bit
- Windows 11 Pro National Academic, 64-bit
- Windows 10 Home, 64-bit
- Windows 10 Pro, 64-bit

# Memory

The following table lists the memory specifications of your Inspiron 7506 2-in-1 Silver.

**Table 5. Memory specifications**

Description	Values
Memory slots	Two-SODIMM slots
Memory type	Dual-channel DDR4
Memory speed	3200 MHz
Maximum memory configuration	16 GB
Minimum memory configuration	4 GB
Memory size per slot	4 GB, 8 GB, and 16 GB
Memory configurations supported	<ul style="list-style-type: none"><li>• 4 GB DDR4 at 3200 MHz (1 x 4 GB)</li><li>• 8 GB DDR4 at 3200 MHz (1 x 8 GB)</li><li>• 8 GB DDR4 at 3200 MHz (2 x 4 GB), dual-channel</li><li>• 12 GB DDR4 at 3200 MHz (1 x 4 GB + 1 x 8 GB)</li><li>• 16 GB DDR4 at 3200 MHz ( 2 x 8 GB), dual-channel</li><li>• 16 GB DDR4 at 3200 MHz (1 x 16 GB)</li></ul>

## External ports

The following table lists the external ports on your Inspiron 7506 2-in-1 Silver.


**Table 6. External ports**

Description	Values
USB ports	<ul style="list-style-type: none"><li>Two USB 3.2 Gen 1 ports</li><li>One Thunderbolt 4 Type-C port with Power Delivery</li></ul>
Audio port	One headset (headphone and microphone combo) port
Video port	One HDMI 1.4b port
Media-card reader	One SD-card slot
Docking port	Not supported
Power-adaptor port	One 4.5 mm x 2.9 mm DC-in
Security	Not supported

## Internal slots

The following table lists the internal slots of your Inspiron 7506 2-in-1 Silver.

**Table 7. Internal slots**

Description	Values
M.2	<ul style="list-style-type: none"><li>One M.2 2230 slot for WiFi and Bluetooth combo card</li><li>One M.2 2280 slot for solid-state drive/Intel Optane/Intel Optane Storage</li></ul> <p> <b>NOTE:</b> To learn more about the features of different types of M.2 cards, see the knowledge base article <a href="https://www.dell.com/support/000144170">000144170</a> at <a href="https://www.dell.com/support">www.dell.com/support</a>.</p>

## Wireless module

The following table lists the Wireless Local Area Network (WLAN) module supported on your Inspiron 7506 2-in-1 Silver.

**Table 8. Wireless module specifications**

Description	Values
Model number	Intel AX201
Transfer rate	Up to 2400 Mbps
Frequency bands supported	2.4 GHz/5 GHz
Wireless standards	<ul style="list-style-type: none"><li>WiFi 802.11a/b/g</li><li>Wi-Fi 4 (WiFi 802.11n)</li><li>Wi-Fi 5 (WiFi 802.11ac)</li><li>Wi-Fi 6 (WiFi 802.11ax)</li></ul>

**Table 8. Wireless module specifications (continued)**

Description	Values
Encryption	<ul style="list-style-type: none"> <li>64-bit/128-bit WEP</li> <li>AES-CCMP</li> <li>TKIP</li> </ul>
Bluetooth	Bluetooth 5

## Audio

The following table lists the audio specifications of your Inspiron 7506 2-in-1 Silver.

**Table 9. Audio specifications**

Description	Values	
Audio controller	Realtek ALC3254	
Stereo conversion	Supported	
Internal audio interface	High-definition audio	
External audio interface	Universal audio jack	
Number of speakers	Two	
Internal-speaker amplifier	Supported	
External volume controls	Keyboard shortcut controls	
Speaker output:		
	Average speaker output	2 W
	Peak speaker output	2.5 W
Subwoofer output	Not supported	
Microphone	Dual-array microphones	

## Storage

This section lists the storage options on your Inspiron 7506 2-in-1 Silver.

Your Inspiron 7506 2-in-1 Silver supports one of the following storage configurations:

- M.2 2230/2280 PCIe/NVMe solid-state drive
- M.2 2280 PCIe/NVMe solid-state drive + 32 GB Intel Optane Storage
- M.2 2280 PCIe/NVMe Intel Optane Storage

The primary drive of your Inspiron 7506 2-in-1 Silver varies with the storage configuration. For computers:

- with a M.2 drive, the M.2 drive is the primary drive
- without a M.2 drive, the 2.5-inch hard drive is the primary drive

**Table 10. Storage specifications**

Storage type	Interface type	Capacity
One M.2 2230/2280 PCIe/NVMe SSD	PCIe NVMe Gen3 x4, up to 32 Gbps	Up to 512 GB

**Table 10. Storage specifications (continued)**

Storage type	Interface type	Capacity
One M.2 2280 PCIe/NVMe SSD	PCIe NVMe Gen3 x4, up to 32 Gbps	Up to 2 TB
One M.2 2280 PCIe/NVMe SSD + Intel Optane	PCIe NVMe Gen3 x2, up to 32 Gbps	Up to 1 TB

## Intel Optane Memory H10 with solid-state storage (optional)

Intel Optane Memory technology utilizes 3D XPoint memory technology and functions as a non-volatile storage cache/accelerator and/or storage device depending on the Intel Optane Memory installed in your computer.

Intel Optane Memory H10 with solid-state storage functions as both a non-volatile storage cache/accelerator (enabling enhanced read/write speeds for hard-drive storage) and a solid-state storage solution. It neither replaces nor adds to the memory (RAM) installed on your computer.

**Table 11. Intel Optane Memory H10 with solid-state storage specifications**

Description	Values
Interface	PCIe Gen3 x4 NVMe
Connector	M.2
Form factor	2280
Capacity (Intel Optane memory)	Up to 32 GB
Capacity (solid-state storage)	Up to 1 TB

**NOTE:** Intel Optane Memory H10 with solid-state storage is supported on computers that meet the following requirements:

- 9<sup>th</sup> Generation or higher Intel Core i3/i5/i7 processors
- Windows 10 64-bit version or higher
- Intel Rapid Storage Technology driver version 15.9.1.1018 or higher

## Media-card reader

The following table lists the media cards supported by your Inspiron 7506 2-in-1 Silver.

**Table 12. Media-card reader specifications**

Description	Values
Media-card type	One SD-card slot
Media-cards supported	<ul style="list-style-type: none"> <li>• Secure Digital (SD)</li> <li>• Secure Digital High Capacity (SDHC)</li> <li>• Secure Digital Extended Capacity (SDXC)</li> </ul>
<p><b>NOTE:</b> The maximum capacity supported by the media-card reader varies depending on the standard of the media card installed in your computer.</p>	



# Keyboard

The following table lists the keyboard specifications of your Inspiron 7506 2-in-1 Silver.

**Table 13. Keyboard specifications**

Description	Values
Keyboard type	Backlit keyboard
Keyboard layout	QWERTY
Number of keys	<ul style="list-style-type: none"> <li>• United States and Canada: 101 keys</li> <li>• United Kingdom: 102 keys</li> </ul>
Keyboard size	X =18.70 mm key pitch Y =18.05 mm key pitch
Keyboard shortcuts	<p>Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. To type the alternate character, press Shift and the desired key. To perform secondary functions, press Fn and the desired key.</p> <p><b>NOTE:</b> You can define the primary behavior of the function keys (F1–F12) changing <b>Function Key Behavior</b> in BIOS setup program.</p> <p>For more information, see <a href="#">Keyboard shortcuts</a>.</p>

# Camera

The following table lists the camera specifications of your Inspiron 7506 2-in-1 Silver.

**Table 14. Camera specifications**

Description	Values
Number of cameras	One
Camera type	RGB HD camera
Camera location	Front
Camera sensor type	CMOS sensor technology
Camera resolution:	
Still image	0.92 megapixel
Video	1280 x 720 (HD) at 30 fps
Diagonal viewing angle:	74.9 degrees

# Touchpad

The following table lists the touchpad specifications of your Inspiron 7506 2-in-1 Silver.


**Table 15. Touchpad specifications**

Description	Values
Touchpad resolution:	
Horizontal	1349
Vertical	929
Touchpad dimensions:	
Horizontal	115 mm (4.53 in.)
Vertical	80 mm (3.15 in.)
Touchpad gestures	For more information about touchpad gestures available on Windows, see the Microsoft knowledge base article <a href="https://support.microsoft.com/4027871">4027871</a> at <a href="https://support.microsoft.com">support.microsoft.com</a> .

# Power adapter

The following table lists the power adapter specifications of your Inspiron 7506 2-in-1 Silver.



**Table 16. Power adapter specifications**

Description	Values
Type	65 W
Connector dimensions:	
External diameter	4.50 mm
Internal diameter	2.90 mm
Input voltage	100 VAC–240 VAC
Input frequency	50 Hz–60 Hz
Input current (maximum)	1.50 A
Output current (continuous)	3.47 A
Rated output voltage	19.50 VDC
Temperature range:	
Operating	0°C to 40°C (32°F to 104°F)
Storage	-40°C to 70°C (-40°F to 158°F)
 <b>CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.</b>	

# Battery

The following table lists the battery specifications of your Inspiron 7506 2-in-1 Silver.

**Table 17. Battery specifications**

Description		Values
Battery type		53 Wh, 3-cell "smart" lithium-ion
Battery voltage		15.20 VDC
Battery weight (maximum)		0.23 kg (0.50 lb)
Battery dimensions:		
	Height	5.75 mm (0.22 in.)
	Width	239.10 mm (9.41 in.)
	Depth	90.73 mm (3.57 in.)
Temperature range:		
	Operating	0°C to 35°C (32°F to 95°F)
	Storage	-40°C to 65°C (-40°F to 149°F)
Battery operating time		Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.
Battery charging time (approximate)		4 hours (when the computer is off)
 <b>NOTE:</b> Control the charging time, duration, start and end time, and so on using the Dell Power Manager application. For more information on the Dell Power Manager see, <i>Me and My Dell</i> on <a href="http://www.dell.com">www.dell.com</a> .		
Coin-cell battery		CR2032
 <b>CAUTION:</b> Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.		

# Display

The following table lists the display specifications of your Inspiron 7506 2-in-1 Silver.

**Table 18. Display specifications**


Description		Values
Display type		15.5-inch Full High Definition (FHD)
Display-panel technology		Wide Viewing Angle (WVA)
Display-panel dimensions (active area):		
	Height	193.60 mm (7.62 in.)
	Width	344.20 mm (13.55 in.)
	Diagonal	395 mm (15.55 in.)

**Table 18. Display specifications (continued)**

Description	Values
Display-panel native resolution	1920 x 1080
Luminance (typical)	270 nits
Megapixels	2
Color gamut	100% (sRGB)
Pixels Per Inch (PPI)	142
Contrast ratio (min)	600:1
Response time (max)	35 ms
Refresh rate	60 Hz
Horizontal view angle	+/- 85 degrees
Vertical view angle	+/- 85 degrees
Pixel pitch	0.18 mm
Power consumption (maximum)	4.20 W
Anti-glare vs glossy finish	Anti-glare
Touch options	Yes

## Fingerprint reader

The following table lists the fingerprint-reader specifications of your Inspiron 7506 2-in-1 Silver.

 **NOTE:** The fingerprint reader is located on the power button.

**Table 19. Fingerprint reader specifications**

Description	Values
Fingerprint-reader sensor technology	Capacitive
Fingerprint-reader sensor resolution	500 dpi
Fingerprint-reader sensor pixel size	80 x 64

## GPU—Discrete

The following table lists the specifications of the discrete Graphics Processing Unit (GPU) supported by your Inspiron 7506 2-in-1 Silver.

**Table 20. GPU—Discrete**


Controller	Memory size	Memory type
NVIDIA GeForce MX 330	2 GB	GDDR5

# Operating and storage environment

This table lists the operating and storage specifications of your Inspiron 7506 2-in-1 Silver.

**Airborne contaminant level:** G1 as defined by ISA-S71.04-1985

**Table 21. Computer environment**

Description	Operating	Storage
Temperature range	0°C to 35°C (32°F to 95°F)	-40°C to 65°C (-40°F to 149°F)
Relative humidity (maximum)	10% to 90% (non-condensing)	0% to 95% (non-condensing)
Vibration (maximum)*	0.66 GRMS	1.30 GRMS
Shock (maximum)	110 G†	160 G†
Altitude range	-15.2 m to 3048 m (-49.87 ft to 10,000 ft)	-15.2 m to 10668 m (-49.87 ft to 35,000 ft)
 <b>CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.</b>		

\* Measured using a random vibration spectrum that simulates user environment.

† Measured using a 2 ms half-sine pulse when the hard drive is in use.

## Keyboard shortcuts

**NOTE:** Keyboard characters may differ depending on the keyboard language configuration. Keys used for shortcuts remain the same across all language configurations.




























Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. The symbol shown on the lower part of the key refers to the character that is typed out when the key is pressed. If you press shift and the key, the symbol shown on the upper part of the key is typed out. For example, if you press **2**, **2** is typed out; if you press **Shift + 2**, **@** is typed out.

The keys F1-F12 at the top row of the keyboard are function keys for multi-media control, as indicated by the icon at the bottom of the key. Press the function key to invoke the task represented by the icon. For example, pressing F1 mutes the audio (refer to the table below).





However, if the function keys F1-F12 are needed for specific software applications, multi-media functionality can be disabled by pressing **Fn + Esc**. Subsequently, multi-media control can be invoked by pressing **Fn** and the respective function key. For example, mute audio by pressing **Fn + F1**.

**NOTE:** You can also define the primary behavior of the function keys (F1–F12) by changing **Function Key Behavior** in BIOS setup program.

**Table 22. List of keyboard shortcuts**










Function key	Re-defined key (for multi-media control)	Behavior
	 + 	Mute audio
	 + 	Decrease volume
	 + 	Increase volume
	 + 	Play/Pause
	 + 	Toggle keyboard backlight (optional)
	 + 	Decrease brightness
	 + 	Increase brightness
	 + 	Switch to external display
	 + 	Print screen

**Table 22. List of keyboard shortcuts (continued)**

Function key	Re-defined key (for multi-media control)	Behavior
		Home
		End

The **Fn** key is also used with selected keys on the keyboard to invoke other secondary functions.

**Table 23. List of keyboard shortcuts**



Function key	Behavior
	Pause/Break
	Sleep
	Toggle between power and battery-status light
	Toggle scroll lock
	System request
	Open application menu
	Toggle Fn-key lock
	Page up
	Page down

# Getting help and contacting Dell

## Self-help resources


You can get information and help on Dell products and services using these self-help resources:


**Table 24. Self-help resources**

Self-help resources	Resource location
Information about Dell products and services	<a href="http://www.dell.com">www.dell.com</a>
My Dell app	
Tips	
Contact Support	In Windows search, type <code>Contact Support</code> , and press Enter.
Online help for operating system	<a href="http://www.dell.com/support/windows">www.dell.com/support/windows</a>
Access top solutions, diagnostics, drivers and downloads, and learn more about your computer through videos, manuals and documents.	Your Dell computer is uniquely identified by a Service Tag or Express Service Code. To view relevant support resources for your Dell computer, enter the Service Tag or Express Service Code at <a href="http://www.dell.com/support">www.dell.com/support</a> .  For more information on how to find the Service Tag for your computer, see <a href="#">Locate the Service Tag on your computer</a> .
Dell knowledge base articles for a variety of computer concerns	<ol style="list-style-type: none"> <li>1. Go to <a href="http://www.dell.com/support">www.dell.com/support</a>.</li> <li>2. On the menu bar at the top of the Support page, select <b>Support &gt; Knowledge Base</b>.</li> <li>3. In the Search field on the Knowledge Base page, type the keyword, topic, or model number, and then click or tap the search icon to view the related articles.</li> </ol>

## Contacting Dell

To contact Dell for sales, technical support, or customer service issues, see [www.dell.com/contactdell](http://www.dell.com/contactdell).

 **NOTE:** Availability varies by country/region and product, and some services may not be available in your country/region.

 **NOTE:** If you do not have an active Internet connection, you can find contact information about your purchase invoice, packing slip, bill, or Dell product catalog.