

Vostro 15 5510

Setup and Specifications

Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

Contents

Chapter 1: Set up your Vostro 15 5510.....	4
Chapter 2: Views of Vostro 15 5510.....	6
Right.....	6
Left.....	7
Top.....	8
Front.....	9
Bottom.....	10
Battery charge and status LED	10
Chapter 3: Specifications of Vostro 15 5510.....	11
Dimensions and weight.....	11
Processor.....	12
Chipset.....	12
Operating system.....	12
Memory.....	13
Intel Optane Memory H20 with Solid-State Storage (optional).....	13
External ports and slots.....	14
Internal slots.....	14
Communications.....	15
Audio.....	15
Storage.....	16
Media-card reader.....	16
Keyboard.....	16
Camera.....	17
Touchpad.....	18
Power adapter.....	18
Battery.....	19
Display.....	19
Fingerprint reader (optional).....	20
GPU—Integrated.....	21
GPU—Discrete.....	21
Operating and storage environment.....	21
Chapter 4: Dell ComfortView.....	22
Chapter 5: Keyboard shortcuts.....	23
Chapter 6: Getting help and contacting Dell Technologies.....	25

Set up your Vostro 15 5510

NOTE: The images in this document may differ from your computer depending on the configuration you ordered.

1. Connect the power adapter and press the power button.



NOTE: To conserve battery power, the battery might enter power saving mode. Connect the power adapter and press the power button to turn on the computer.

2. Finish operating system setup.

For Ubuntu:

Follow the on-screen instructions to complete the setup. For more information about installing and configuring Ubuntu, search in the Knowledge Base Resource at [Dell Support Site](#).

For Windows:

Follow the on-screen instructions to complete the setup. When setting up, Dell Technologies recommends that you:






- Connect to a network for Windows updates.

NOTE: If connecting to a secured wireless network, enter the password for the wireless network access when prompted.

- If connected to the Internet, sign-in with or create a Microsoft account. If not connected to the Internet, create an offline account.
- On the **Support and Protection** screen, enter your contact details.

3. Locate and use Dell apps from the Windows Start menu—Recommended.

Table 1. Locate Dell apps

Resources	Description
	<p>Dell Product Registration</p> <p>Register your computer with Dell.</p>
	<p>Dell Help & Support</p> <p>Access help and support for your computer.</p>
	<p>SupportAssist</p> <p>SupportAssist is the smart technology that keeps your computer running at its best by optimizing settings, detecting issues, removing viruses and notifies when you need to make system updates. SupportAssist proactively checks the health of your system's hardware and software. When an issue is detected, the necessary system state information is sent to Dell to begin troubleshooting. SupportAssist is preinstalled on most of the Dell devices running Windows operating system. For more information, see SupportAssist for Home PCs User's Guide on Serviceability Tools at the Dell Support Site.</p> <p>NOTE: In SupportAssist, click the warranty expiry date to renew or upgrade your warranty.</p>
	<p>Dell Update</p> <p>Updates your computer with critical fixes and latest device drivers as they become available. For more information about using Dell Update, search in the Knowledge Base Resource at Dell Support Site.</p>
	<p>Dell Digital Delivery</p> <p>Download software applications, which are purchased but not preinstalled on your computer. For more information about using Dell Digital Delivery, search in the Knowledge Base Resource at Dell Support Site.</p>

Views of Vostro 15 5510

Topics:

- [Right](#)
- [Left](#)
- [Top](#)
- [Front](#)
- [Bottom](#)
- [Battery charge and status LED](#)

Right



1. SD-card slot

Insert a SD card to expand your storage and store photos, videos, and data from your computer. The computer supports the following card types:

- Secure Digital (SD)
- Secure Digital High Capacity (SDHC)
- Secure Digital Extended Capacity (SDXC)

2. USB 3.2 Gen 1 port

Connect peripherals such as keyboard, mice, and printers and external storage devices. Supports data transfer speeds up to 5 Gbps.

3. RJ-45 Ethernet port

Connect an Ethernet (RJ45) cable from a router or a broadband modem for network or Internet access, with a transfer rate of 10/100/1000 Mbps.

4. Global headset jack

Connect headphones or a headset (headphone and microphone combo).

5. Security-cable slot (wedge-shaped)

Connect a security cable to prevent unauthorized movement of your computer.

Left



1. Power-adapter port

Connect the power adapter to charge your computer battery.

2. Power and battery-status light

Indicates the power state and battery state of the computer.

Solid white—Power adapter is connected and the battery is charging.

Solid amber—Battery charge is low or critical.

Off—Battery is fully charged.

NOTE: On certain computer models, the power and battery-status light are also used for diagnostics. For more information, see the *Troubleshooting* section in your computer's *Service Manual*.

3. HDMI 1.4 port

Connect to a TV, external display or another HDMI-in enabled device. Provides video and audio output.

4. USB 3.2 Gen 1 port

Connect peripherals such as keyboard, mice, and printers and external storage devices. Supports data transfer speeds up to 5 Gbps.

5. USB 3.2 Gen 2 Type C port with DisplayPort 1.4 and Power Delivery

Connect devices such as external storage devices, printers, and external displays. Provides data transfer rate of up to 10 Gbps.

Supports Power Delivery that enables two-way power supply between devices. Provides up to 15 W power output that enables faster charging.

NOTE: A USB Type-C to DisplayPort adapter (sold separately) is required to connect a DisplayPort device.

6. Thunderbolt 4.0 port with Power Delivery

Supports USB4, DisplayPort 1.4, Thunderbolt 4 and also enables you to connect to an external display using a display adapter. Provides data transfer rates of up to 40 Gbps for USB4 and Thunderbolt 4.

NOTE: You can connect a Dell Docking Station to the Thunderbolt 4 ports. For more information, see the knowledge base article SLN286158 at [Dell Support Site](#).

NOTE: A USB Type-C to DisplayPort adapter (sold separately) is required to connect a DisplayPort device.

NOTE: USB4 is backward compatible with USB 3.2, USB 2.0, and Thunderbolt 3.

NOTE: Thunderbolt 4 supports two 4K displays or one 8K display.

Top



1. Power button with optional fingerprint reader

Press to turn on the computer if it is turned off, in sleep state, or in hibernate state.

When the computer is turned on, press the power button to put the computer into sleep state; press and hold the power button for 4 seconds to force shut-down the computer.


If the power button has a fingerprint reader, place your finger on the power button to log in.

i **NOTE:** You can customize power-button behavior in Windows. For more information, see *Manuals* at [Dell Support Site](#).

2. Touchpad

Move your finger on the touchpad to move the mouse pointer. Tap to left-click and two fingers tap to right-click.

Front

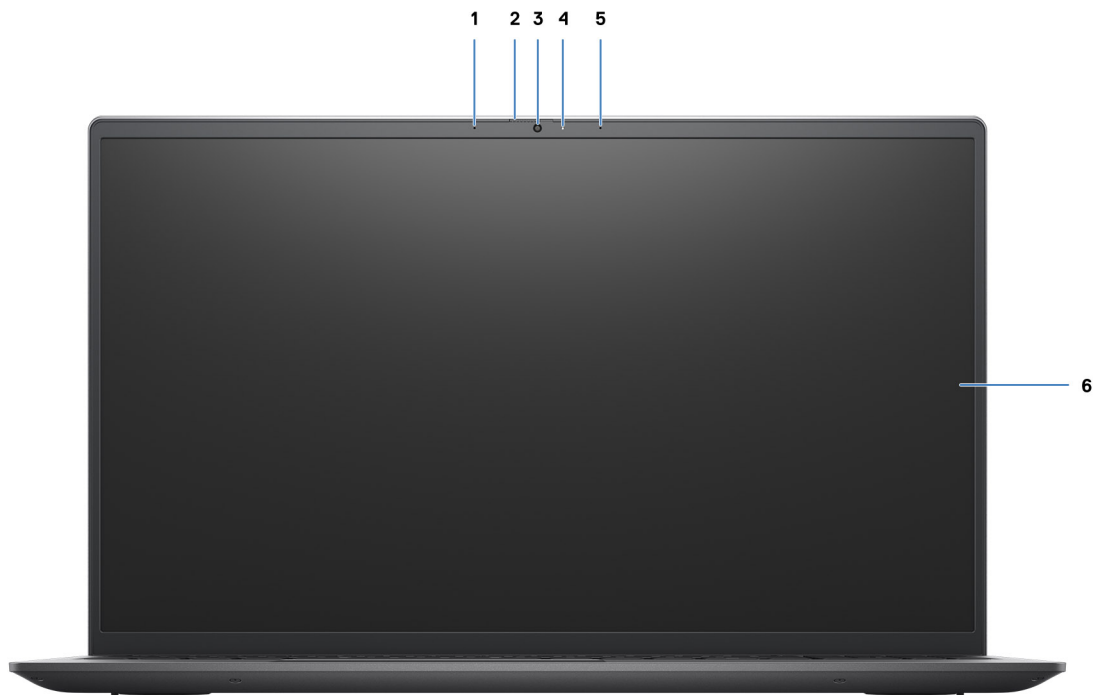

1. Left microphone

Provides digital sound input for audio recording and voice calls.

2. Privacy shutter

Slide the privacy shutter to cover the camera lens and protect your privacy when the camera is not in use.

3. Camera

Make video calls, capture photos, or record videos.

4. Camera-status light


Turns on when the camera is in use.

5. Right microphone

Provides digital sound input for audio recording and voice calls.

6. LCD panel

Bottom

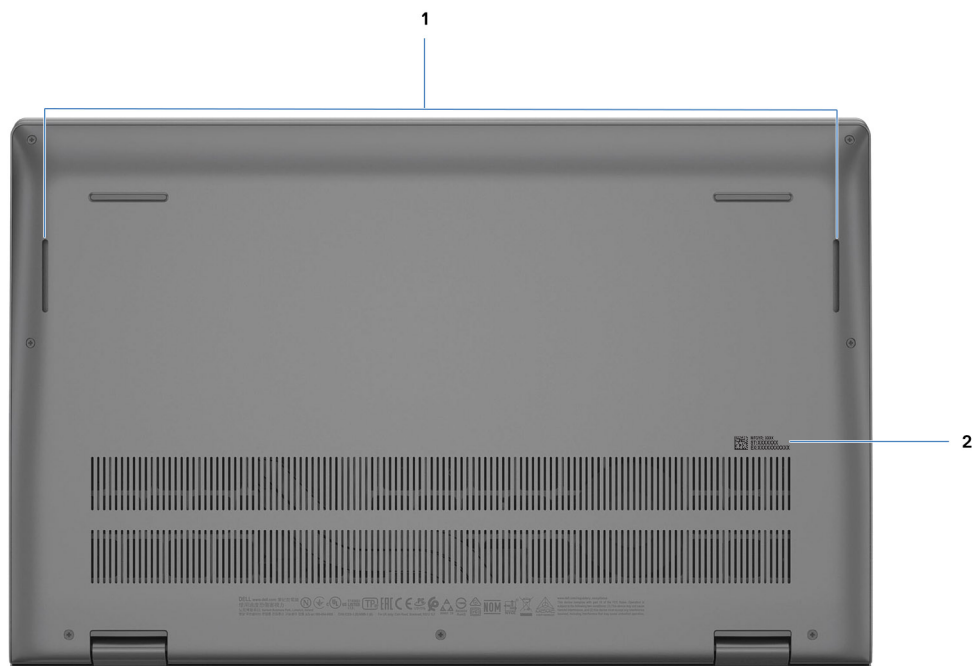

1. Left and right speakers

Provides audio output.

2. Service Tag label

The Service Tag is a unique alphanumeric identifier that enables Dell service technicians to identify the hardware components in your computer and access warranty information.

Battery charge and status LED

Table 2. Battery charge and status LED Indicator

Power Source	LED Behavior	computer Power State	Battery Charge Level
AC Adapter	Off	S0 - S5	Fully Charged
AC Adapter	Solid White	S0 - S5	< Fully Charged
Battery	Off	S0 - S5	11-100%
Battery	Solid Amber (590+/-3 nm)	S0 - S5	< 10%

- S0 (ON) - Computer is turned on.
- S4 (Hibernate) - The computer consumes the least power compared to all other sleep states. The computer is almost at an OFF state, expect for a trickle power. The context data is written to hard drive.
- S5 (OFF) - The computer is in a shutdown state.

Specifications of Vostro 15 5510


Topics:

- Dimensions and weight
- Processor
- Chipset
- Operating system
- Memory
- Intel Optane Memory H20 with Solid-State Storage (optional)
- External ports and slots
- Internal slots
- Communications
- Audio
- Storage
- Media-card reader
- Keyboard
- Camera
- Touchpad
- Power adapter
- Battery
- Display
- Fingerprint reader (optional)
- GPU—Integrated
- GPU—Discrete
- Operating and storage environment

Dimensions and weight

The following table lists the height, width, depth, and weight of your Vostro 15 5510.

Table 3. Dimensions and weight

Description	Values
Height:	
Front height	14.16 mm (0.55 in.)
Rear height	17.99 mm (0.70 in.)
Width	356.06 mm (14.01 in.)
Depth	228.82 mm (9 in.)
Weight (minimum)	1.64 kg (3.61 lb)
Weight (maximum)	1.75 kg (3.85 lb)
	 NOTE: The weight of your computer depends on the configuration ordered and manufacturing variability.

Processor

The following table lists the details of the processors that are supported in your Vostro 15 5510.

Table 4. Processor

Description	Option one	Option two
Processor type	11 th Generation Intel Core i5-11300H	11 th Generation Intel Core i7-11370H
Processor wattage	35 W	35 W
Processor core count	4	4
Processor thread count	8	8
Processor speed	Up to 4.40 GHz	Up to 4.80 GHz
Processor cache	8 MB	12 MB
Integrated graphics	Intel Iris X ^e Graphics	Intel Iris X ^e Graphics

Chipset

The following table lists the details of the chipset that is supported in your Vostro 15 5510.

Table 5. Chipset

Description	Values
Chipset	Integrated
Processor	11 th Generation Intel Core i5/i7
DRAM bus width	64-bit
Flash EPROM	32 MB
PCIe bus	Up to Gen4

Operating system

Your Vostro 15 5510 supports the following operating systems:

- Windows 11 Home, 64-bit
- Windows 11 Pro, 64-bit
- Windows 11 Pro National Academic, 64-bit
- Windows 10 Home, 64-bit
- Windows 10 Pro, 64-bit
- Ubuntu 20.04 LTS, 64-bit

Memory

The following table lists the memory specifications that are supported by your Vostro 15 5510.

Table 6. Memory specifications

Description	Values
Memory slots	Two-SODIMM slots
Memory type	DDR4
Memory speed	3200 MHz
Maximum memory configuration	32 GB
Minimum memory configuration	4 GB
Memory size per slot	4 GB, 8 GB, 16 GB
Memory configurations supported	<ul style="list-style-type: none"> • 4 GB, 1 x 4 GB, DDR4, 3200 MHz • 8 GB, 1 x 8 GB, DDR4, 3200 MHz • 8 GB, 2 x 4 GB, DDR4, 3200 MHz, dual-channel • 12 GB, 1 x 4 GB + 1 x 8 GB, DDR4, 3200 MHz, dual-channel • 16 GB, 1 x 16 GB, DDR4, 3200 MHz • 16 GB, 2 x 8 GB, DDR4, 3200 MHz, dual-channel • 24 GB, 1 x 8 GB + 1 x 16 GB, DDR4, 3200 MHz, dual-channel • 32 GB, 2 x 16 GB, DDR4, 3200 MHz, dual-channel

Intel Optane Memory H20 with Solid-State Storage (optional)

Intel Optane Memory technology uses 3D XPoint memory technology and functions as a nonvolatile storage cache/accelerator and/or storage device depending on the Intel Optane Memory that is installed in your system.

Intel Optane Memory H20 with Solid-State Storage functions as both a nonvolatile storage cache/accelerator (enabling enhanced read/write speeds for hard drive storage) and a solid-state storage solution. It neither replaces nor adds to the memory (RAM) installed on your system.

Table 7. Intel Optane Memory H20 with Solid-State Storage specifications

Description	Values
Interface	PCIe NVMe Gen3 x4
Connector	M.2 2280
Form factor	2280
Capacity (Intel Optane memory)	Up to 32 GB
Capacity (solid-state storage)	Up to 512 GB

NOTE: Intel Optane Memory H20 with Solid-State Storage is supported on systems that meet the following requirements:

- 11th Generation or higher Intel Core i3/i5/i7 processors
- Windows 10 64-bit version or higher
- Intel Rapid Storage Technology driver version 18.1.0.1027 or higher

External ports and slots

The following table lists the external ports and slots of your Vostro 15 5510.

Table 8. External ports and slots

Description	Values
Network port	One RJ45 Ethernet port
USB ports	<ul style="list-style-type: none"> Two USB 3.2 Gen 1 ports One USB 3.2 Gen 2 Type-C port with DisplayPort 1.4 and Power Delivery <p>NOTE: This port is only available on computers that are shipped with 11th Generation Intel Core i5 processors.</p> <ul style="list-style-type: none"> One Thunderbolt 4 port with Power Delivery <p>NOTE: This port is only available on computers that are shipped with 11th Generation Intel Core i7 processors.</p>
Audio port	One global headset jack
Video port(s)	One HDMI 1.4 port
Media-card reader	One SD card reader
Power-adaptor port	One DC-in port (4.50 mm barrel type)
Security-cable slot	One wedge-shaped lock slot

Internal slots

The following table lists the internal slots of your Vostro 15 5510.

Table 9. Internal slots

Description	Values
M.2	<ul style="list-style-type: none"> One M.2 2230 slot for WiFi and Bluetooth combo card One M.2 2230/2280 slot for solid-state drive/Intel Optane One M.2 2230 slot for solid-state drive/Intel Optane <p>NOTE: To learn more about the features of different types of M.2 cards, search in the Knowledge Base Resource at Dell Support Site.</p>

Communications

Ethernet

Table 10. Ethernet specifications

Description	Values
Model	Realtek RTL8111H-CG
Transfer rate	10/100/1000 Mbps

Wireless module

Table 11. Wireless module specifications

Description	Option one	Option two	Option three
Model	Intel 9462	Qualcomm QCA61x4A	Intel AX201
Transfer rate	Up to 433 Mbps	Up to 867 Mbps	Up to 2.40 Gbps
Frequency bands supported	2.4 GHz/5 GHz	2.4 GHz/5 GHz	2.4 GHz/5 GHz
Wireless standards	<ul style="list-style-type: none"> WiFi 802.11a/b/g Wi-Fi 4 (Wi-Fi 802.11n) Wi-Fi 5 (Wi-Fi 802.11ac) 	<ul style="list-style-type: none"> WiFi 802.11a/b/g WiFi 802.11n WiFi 802.11ac 	<ul style="list-style-type: none"> WiFi 802.11a/b/g Wi-Fi 4 (Wi-Fi 802.11n) Wi-Fi 5 (Wi-Fi 802.11ac) Wi-Fi 6 (Wi-Fi 802.11ax)
Encryption	<ul style="list-style-type: none"> 64-bit/128-bit WEP AES-CCMP TKIP 	<ul style="list-style-type: none"> 64-bit/128-bit WEP AES-CCMP TKIP 	<ul style="list-style-type: none"> 64-bit/128-bit WEP AES-CCMP TKIP
Bluetooth	Bluetooth 5.0	Bluetooth 5.0	Bluetooth 5.1

Audio

The following table lists the audio specifications of your Vostro 15 5510.

Table 12. Audio specifications

Description	Values
Audio controller	<ul style="list-style-type: none"> Realtek Cirrus Logic
Stereo conversion	Supported
Internal audio interface	High definition audio
External audio interface	Global headset jack
Number of speakers	Two
Internal-speaker amplifier	Supported (audio codec integrated)
External volume controls	Keyboard shortcut controls

Table 12. Audio specifications (continued)

Description		Values
Speaker output:		
	Average	2 W
	Peak	2.5 W
Microphone		Dual-array microphones

Storage

This section lists the storage options on your Vostro 15 5510.

Your computer supports one of the following configurations:

- M.2 drive x1
- M.2 drive x2

The primary drive of your computer varies with the storage configuration. For systems with a M.2 drive, the M.2 drive is the primary drive.


Table 13. Storage specifications

Storage type	Interface type	Capacity
M.2 2230, Class 35 solid-state drive	PCIe NVMe 3x4	Up to 1 TB
M.2 2280, Class 40 solid-state drive	PCIe NVMe 3x4	Up to 1 TB
M.2 2280, Class 40 solid-state drive	PCIe NVMe 4x4	2 TB
M.2 2280, QLC solid-state drive	PCIe NVMe 3x4	Up to 1 TB

Media-card reader

The following table provides the specification of media cards supported by your Vostro 15 5510.

Table 14. Media-card reader specifications

Description	Values
Media-card slot type	One SD card reader
Media-cards supported	Secure Digital (SD)
 NOTE: The maximum capacity that is supported by the media-card reader varies depending on the standard of the media card that is installed on your computer.	

Keyboard

The following table lists the keyboard specifications of your Vostro 15 5510.

Table 15. Keyboard specifications

Description	Values
Keyboard type	<ul style="list-style-type: none"> • Standard keyboard • Backlit keyboard

Table 15. Keyboard specifications (continued)

Description	Values
Keyboard layout	QWERTY
Number of keys	<ul style="list-style-type: none"> ● United States and Canada: 99 keys ● United Kingdom: 100 keys ● Japan: 103 keys
Keyboard size	X =18.70 mm key pitch Y =18.05 mm key pitch
Keyboard shortcuts	<p>Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. To type the alternate character, press Shift and the desired key. To perform secondary functions, press Fn and the desired key.</p> <p>i NOTE: You can define the primary behavior of the function keys (F1–F12) changing Function Key Behavior in the BIOS setup program.</p> <p>i NOTE: If Copilot in Windows is not available on your computer, pressing the Copilot key launches Windows search. For more information about Copilot in Windows, search in the Knowledge Base Resource at the Dell Support site.</p>

Camera

The following table lists the camera specifications of your Vostro 15 5510.

Table 16. Camera specifications

Description	Values	
Number of cameras	One	
Camera type	HD RGB camera	
Camera location	Front camera	
Camera sensor type	CMOS sensor technology	
Camera resolution:		
	Still image	0.92 megapixel
	Video	1280 x 720 (HD) at 30 fps
Diagonal viewing angle	74.90 degrees	

Touchpad

The following table lists the touchpad specifications of your Vostro 15 5510.

Table 17. Touchpad specifications

Description		Touchpad (Elan)	Touchpad (Goodix)
Touchpad resolution:			
	Horizontal	3512	1920
	Vertical	2442	1080
Touchpad dimensions:			
	Horizontal	115 mm (4.53 in.)	115 mm (4.53 in.)
	Vertical	80 mm (3.15 in.)	80 mm (3.15 in.)
Touchpad gestures		For more information about touchpad gestures available on Windows, see the Microsoft knowledge base article 4027871 at support.microsoft.com .	

Power adapter

The following table lists the power adapter specifications of your Vostro 15 5510.



Table 18. Power adapter specifications

Description		Values
Type		65 W, Barrel type
Connector dimensions:		
	External diameter	4.50 mm
	Internal diameter	2.90 mm
Input voltage		100 VAC-240 VAC
Input frequency		50 Hz-60 Hz
Input current (maximum)		1.60 A/1.70 A
Output current (continuous)		3.34 A
Rated output voltage		19.50 VDC
Temperature range:		
	Operating	0°C to 40°C (32°F to 104°F)
	Storage	-40°C to 70°C (-40°F to 158°F)

Battery

The following table lists the battery specifications of your Vostro 15 5510.

Table 19. Battery specifications

Description	Option one	Option two
Battery type	3-Cell, 41 Wh Polymer	4-cell, 54 Wh Polymer
	 NOTE: The battery is a Field Replaceable Unit (FRU).	
Battery voltage	11.25 VDC	15 VDC
Battery weight (maximum)	0.176 kg (0.38 lb)	0.231 kg (0.50 lb)
Battery dimensions:		
	Height	206.40 mm (8.12 in.)
	Width	82.00 mm (3.22 in.)
	Depth	5.75 mm (0.22 in.)
Temperature range:		
	Operating	0°C (32°F)°C to 35°C (95°F)°C
	Storage	-20°C (-4°F)°C to 65°C (149°F)
Battery operating time	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.
Battery charging time (approximate)	4 hours hours (when the computer is off)	4 hours hours (when the computer is off)
	 NOTE: You can control the charging time, duration, start and end time, and so on, using the Dell Power Manager application. For more information about Dell Power Manager, search in the Knowledge Base Resource at Dell Support Site .	
Approximate life span (discharge/charge cycles)	300 cycles at room temperature	300 cycles at room temperature
ExpressCharge	Supported	Supported
Coin-cell battery	CR2032	CR2032

Display

The following table lists the display specifications of your Vostro 15 5510.

Table 20. Display specifications

Description	Option one	Option two
Display type	Full High Definition (FHD)	Full High Definition (FHD)

Table 20. Display specifications (continued)

Description		Option one	Option two
Touch options		No	No
Display-panel technology		Wide-Viewing Angle (WVA), ComfortView Plus	Wide-Viewing Angle (WVA), ComfortView
Display-panel dimensions (active area):			
	Height	193.60 mm (7.62 in.)	193.60 mm (7.62 in.)
	Width	344.20 mm (13.55 in.)	344.20 mm (13.55 in.)
	Diagonal	394.90 mm (15.6 in.)	394.90 mm (15.6 in.)
Display-panel native resolution		1920x1080	1920x1080
Luminance (typical)		300 nits	250 nits
Megapixels		2.0736	2.0736
Color gamut		sRGB 100% typical	NTSC 45% typical
Pixels Per Inch (PPI)		141 ppi	141 ppi
Contrast ratio (minimum)		600:1	600:1
Response time (maximum)		35 ms	35 ms
Refresh rate		60 Hz	60 Hz
Horizontal view angle		80 minimum	80 minimum
Vertical view angle		80 minimum	80 minimum
Pixel pitch		0.179 mm x 0.179 mm	0.179 mm x 0.179 mm
Power consumption (maximum)		4.40 W	4.60 W
Anti-glare vs glossy finish		Anti-glare	Anti-glare

Fingerprint reader (optional)

The following table lists the specifications of the optional fingerprint-reader of your Vostro 15 5510.

Table 21. Fingerprint reader specifications

Description	Values
Sensor technology	Capacitive
Sensor resolution	500 dpi
Sensor pixel size	108 x 88

GPU—Integrated

The following table lists the specifications of the integrated Graphics Processing Unit (GPU) supported by your Vostro 15 5510.

Table 22. GPU—Integrated

Controller	External display support	Memory size	Processor
Intel Iris X ^e Graphics	One HDMI 1.4	Shared system memory	11 th Generation Intel Core i5/i7

GPU—Discrete

The following table lists the specifications of the discrete Graphics Processing Unit (GPU) supported by your Vostro 15 5510.

Table 23. GPU—Discrete

Controller	External display support	Memory size	Memory type
NVIDIA GeForce MX450	N/A	2 GB	GDDR5

Operating and storage environment

This table lists the operating and storage specifications of your Vostro 15 5510.

Airborne contaminant level: G1 as defined by ISA-S71.04-1985

Table 24. Computer environment

Description	Operating	Storage
Temperature range	0°C to 40°C (32°F to 104°F)	-40°C to 65°C (-40°F to 149°F)
Relative humidity (maximum)	10% to 90% (non-condensing)	0% to 95% (non-condensing)
Vibration (maximum)*	0.66 GRMS	N/A
Shock (maximum)	110 G†	N/A
Altitude range	N/A	N/A

CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.

* Measured using a random vibration spectrum that simulates the user environment.

† Measured using a 2 ms half-sine pulse.

Dell ComfortView

CAUTION: Prolonged exposure to blue light, particularly from digital sources may disrupt sleep patterns and cause long-term effects such as eye strain, eye fatigue, or damage to the eyes.

Blue light is a color in the white light spectrum which has a short wavelength and high frequency. Chronic exposure to blue light, particularly from digital sources may disrupt sleep patterns and change our body's Circadian rhythm. Using the computer for an extended period may also cause fatigue in other body parts such as the neck, arm, back, and shoulder.

Dell low blue light displays optimize eye comfort with a flicker-free screen. The ComfortView feature reduces the amount of blue light emitted from the monitor to optimize eye comfort. ComfortView mode can be enabled and configured using the **Dell CinemaColor** (DCC) application. Dell ComfortView is certified by TÜV.

Dell CinemaColor

Dell CinemaColor (DCC) combines the hardware and software to deliver clear visuals that appear every bit as vibrant as the world around you. The DCC has four color profiles that optimize these settings depending on the content and your surroundings.

When you open DCC, you can choose **Movie (default)**, **ComfortView**, **Sports**, or **Animation** from the list. The ComfortView Profile optimizes eye comfort with a Low Blue Light software solution that meets TÜV standards to reduce harmful blue light emissions to make extended screen time easy on your eyes compared to standard digital panels while still retaining the vibrant colors.

ComfortView mode is certified by TÜV for the effective reduction of hazardous blue light by adjusting display parameters. You can adjust the Saturation, Temperature, and Contrast values to create your custom setting in the ComfortView mode.

NOTE: For more information about Dell CinemaColor, see [Dell Support Site](#).

ComfortView Plus

ComfortView Plus is a built-in, always-on, and virtually unnoticeable low blue light solution for Dell displays. ComfortView Plus employs a hardware-based design that allows for a wider blue spectrum, with a much lower peak and reduced intensity. Dell ComfortView Plus is certified by TÜV certified - low blue light hardware solution.

NOTE: ComfortView Plus is an optional hardware feature to be configured at the point of sale.

To reduce the risk of eye strain, it is also recommended that you:

- Position the display at a comfortable viewing distance between 20 in. to 28 in. (50 cm and 70 cm) from your eyes.
- Blink frequently to moisten your eyes, wet your eyes with water, or apply suitable eye drops.
- Look away from your display, and gaze at a distant object at 20 ft (609.60 cm) away for at least 20 seconds during each break.
- Take an extended break for 20 minutes every two hours.

Keyboard shortcuts

NOTE: Keyboard characters may differ depending on the keyboard language configuration. Keys used for shortcuts remain the same across all language configurations.

Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. The symbol shown on the lower part of the key refers to the character that is typed out when the key is pressed. If you press shift and the key, the symbol shown on the upper part of the key is typed out. For example, if you press **2**, **2** is typed out; if you press **Shift + 2**, **@** is typed out.

The keys F1-F12 at the top row of the keyboard are function keys for multi-media control, as indicated by the icon at the bottom of the key. Press the function key to invoke the task represented by the icon. For example, pressing F1 mutes the audio (refer to the table below).

However, if the function keys F1-F12 are needed for specific software applications, multi-media functionality can be disabled by pressing **fn + Esc**. Subsequently, multi-media control can be invoked by pressing **fn** and the respective function key. For example, mute audio by pressing **fn + F1**.

NOTE: You can also define the primary behavior of the function keys (F1–F12) by changing **Function Key Behavior** in BIOS setup program.

Table 25. List of keyboard shortcuts

Function key	Re-defined key (for multi-media control)	Behavior
F1	fn + F1	Mute audio
F2	fn + F2	Decrease volume
F3	fn + F3	Increase volume
F4	fn + F4	Play/Pause
F5	fn + F5	Toggle keyboard backlight (optional)
F6	fn + F6	Decrease brightness
F7	fn + F7	Increase brightness
F8	fn + F8	Switch to external display
F10	fn + F10	Print screen
F11	fn + F11	Home
F12	fn + F12	End

The **fn** key is also used with selected keys on the keyboard to invoke other secondary functions.

Table 26. List of keyboard shortcuts

Function key	Behavior
fn + B	Pause/Break
fn + H	Toggle between power light and battery-status light
fn + S	Toggle scroll lock
fn + R	System request
fn + ctrl	Open application menu
fn + esc	Toggle fn-key lock
fn + page up	Page up

Table 26. List of keyboard shortcuts (continued)



Function key	Behavior
fn + page down	Page down

Getting help and contacting Dell Technologies

Self-help resources

You can get information and help on Dell Technologies products and services using these self-help resources:


Table 27. Self-help resources

Self-help resources	Resource location
Information about Dell Technologies products and services	Dell Site
MyDell app	
Tips	
Contact Support	In Windows search, type <code>Contact Support</code> , and press Enter.
Online help for operating system	Windows Support Site
Access top solutions, diagnostics, drivers and downloads, and learn more about your computer through videos, manuals, and documents.	Your Dell Technologies computer is uniquely identified using a Service Tag or Express Service Code. To view relevant support resources for your Dell Technologies computer, enter the Service Tag or Express Service Code at Dell Support Site . For more information about how to find the Service Tag for your computer, see Instructions on how to find your Service Tag or Serial Number .
Dell Technologies knowledge base articles	<ol style="list-style-type: none"> 1. Go to Dell Support Site. 2. On the menu bar at the top of the Support page, select Support > Support Library. 3. In the Search field on the Support Library page, type the keyword, topic, or model number, and then click or tap the search icon to view the related articles.

Contacting Dell Technologies

To contact Dell Technologies for sales, technical support, or customer service issues, see [Contact Support at Dell Support Site](#).

 **NOTE:** Availability of the services may vary depending on the country or region, and product.

 **NOTE:** If you do not have an active Internet connection, you can find contact information about your purchase invoice, packing slip, bill, or Dell Technologies product catalog.