Alienware m15 R4 Setup and Specifications

NOTE: A NOTE indicates important information that helps you make better use of your product. CAUTION: A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

MARNING: A WARNING indicates a potential for property damage, personal injury, or death.

Notes, cautions, and warnings

© 2020-2023 Dell Inc. or its subsidiaries. All rights reserved. Dell, EMC, and other trademarks are trademarks of Dell Inc. or its subsidiaries. Other trademarks may be trademarks of their respective owners.

Contents

Chapter 2: Views of Alienware m15 R4	5
Right	
Left	
Тор	
Front	
Back	
Bottom	
Chapter 3: Specifications of Alienware m15 R4	9
Dimensions and weight	
Processor	9
Chipset	1C
Operating system	10
Memory	1C
External ports	11
Internal slots	1
Ethernet	11
Wireless module	12
Audio	12
Storage	13
Media-card reader	13
Keyboard	13
Camera	14
Touchpad	14
Power adapter	15
Battery	15
Display	16
GPU—Integrated	
GPU—Discrete	17
Operating and storage environment	17
Chapter 4: Keyboard shortcuts	19
Chapter 5: Alienware Command Center	20

Set up your Alienware m15 R4

(i) NOTE: The images in this document may differ from your computer depending on the configuration you ordered.

Connect the power adapter and press the power button.



Views of Alienware m15 R4

Right



1. microSD-card slot

Reads from and writes to the microSD-card. The computer supports the following card types:

- Micro Secure Digital (mSD)
- Micro Secure Digital High Capacity (mSDHC)
- Micro Secure Digital Extended Capacity (mSDXC)

2. USB 3.2 Gen 1 ports (2)

Connect devices such as external storage devices and printers. Provides data transfer speeds up to 5 Gbps.

Left



1. Security-cable slot (wedge-shaped)

Connect a security cable to prevent unauthorized movement of your computer.

2. Network port

Connect an Ethernet (RJ45) cable from a router or a broadband modem for network or Internet access.

3. USB 3.2 Gen 1 port with PowerShare

Connect devices such as external storage devices and printers.

Provides data transfer speeds up to 5 Gbps. PowerShare enables you to charge your USB devices even when your computer is turned off.

- NOTE: If the charge on your computer's battery is less than 10 percent, you must connect the power adapter to charge your computer, and USB devices connected to the PowerShare port.
- NOTE: If a USB device is connected to the PowerShare port before the computer is turned off or in hibernate state, you must disconnect and connect it again to enable charging.
- NOTE: Certain USB devices may not charge when the computer is turned off or in sleep state. In such cases, turn on the computer to charge the device.

4. Headset port

Connect headphones or a headset (headphone and microphone combo).

Top



1. Touchpad

Move your finger on the touchpad to move the mouse pointer. Tap to left-click and two fingers tap to right-click.

2. Left-click button

Press to left-click.

3. Right-click button

Press to right-click.

4. Power button (Alienhead)


Press to turn on the computer if it is turned off, in sleep state, or in hibernate state.

Press to put the computer in sleep state if it is turned on.

Press and hold for four seconds to force shut-down the computer.

- (i) NOTE: You can customize the power-button behavior in Windows.
- (i) **NOTE:** The power button LED breathes while charging through AC adapter. The LED turns blue after the system is fully charged (97% 100%).
- (i) NOTE: This computer supports AlienFX, which lets you choose from an array of color and transition effects across multiple zones on the computer, including the keyboard and power button. For more information, see Alienware Command Center.

Front

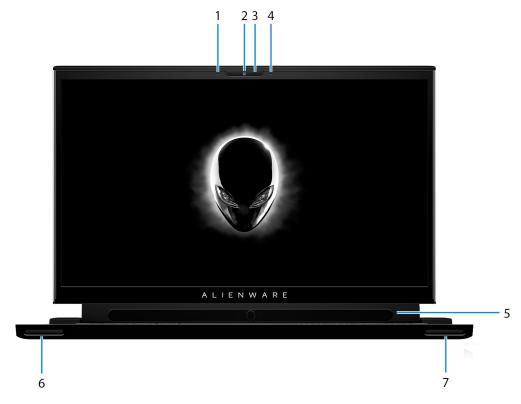

1. Left microphone

Provides digital sound input for audio recording and voice calls.

2. Camera

Enables you to video chat, capture photos, and record videos.

3. Camera-status light

Turns on when the camera is in use.

4. Right microphone

Provides digital sound input for audio recording and voice calls.

5. Tobii Eye Tracker (optional)

Application that enables you to interact with your computer using your eyes.

6. Left speaker

Provides audio output.

7. Right speaker

Provides audio output.

Back



1. HDMI port

Connect to a TV, external display or another HDMI-in enabled device. Provides video and audio output.

2. Mini DisplayPort

Connect to a TV or another DisplayPort-in enabled device. Mini DisplayPort provides video and audio output.

3. Thunderbolt 3 (USB Type-C) port with Power Delivery

Supports USB 3.2 Gen 2, DisplayPort 1.4, Thunderbolt 3 and also enables you to connect to an external display using a display adapter. Provides data transfer rates up to 10 Gbps for USB 3.2 Gen 2 and up to 40 Gbps for Thunderbolt 3. Supports Power Delivery that enables two-way power supply between devices. Provides up to 5 V power output that enables faster charging.

(i) NOTE: A USB Type-C to DisplayPort adapter (sold separately) is required to connect a DisplayPort device.

4. External graphics port

Connect an Alienware Graphics Amplifier to enhance the graphics performance.

5. Power-adapter port

Connect a power adapter to provide power to your computer and charge the battery.

Bottom



1. Left speaker

Provides audio output.

2. Service Tag label

The Service Tag is a unique alphanumeric identifier that enables Dell service technicians to identify the hardware components in your computer and access warranty information.

3. Right speaker

Provides audio output.

Specifications of Alienware m15 R4

Dimensions and weight

The following table lists the height, width, depth, and weight of your Alienware m15 R4.

Table 1. Dimensions and weight

Description	Values
Height:	
Front height	 18.30 mm (0.72 in.) for computers shipped with a 60 Hz or 144 Hz display 17.90 mm (0.70 in.) for computers shipped with a 144 Hz Dynamic Display Switch (DDS) display or 300 Hz display
Rear height	19.70 mm (0.78 in.)
Width	360.30 mm (14.19 in.)
Depth	 276.20 mm (10.87 in.) for computers shipped with a 60 Hz or 144 Hz display 275.90 mm (10.86 in.) for computers shipped with a 144 Hz Dynamic Display Switch (DDS) display or 300 Hz display
Weight (maximum)	2.50 kg (5.51 lb) (i) NOTE: The weight of your computer depends on the configuration ordered and manufacturing variability.

Processor

The following table lists the details of the processors supported by your Alienware m15 R4.

Table 2. Processor

Description	Option one	Option two
Processor type	10 th Generation Intel Core i7-10870H	10 th Generation Intel Core i9-10980HK
Processor wattage	45 W	45 W
Processor core count	8	8
Processor thread count	16	16
Processor speed	Up to 5 GHz	Up to 5.3 GHz
Processor cache	16 MB	16 MB
Integrated graphics	Intel UHD graphics	Intel UHD graphics

Chipset

The following table lists the details of the chipset supported by your Alienware m15 R4.

Table 3. Chipset

Description	Values
Chipset	HM470
Processor	10 th Generation Intel Core i7/i9K
DRAM bus width	128-bit
Flash EPROM	16 MB
PCle bus	Up to Gen3

Operating system

Your Alienware m15 R4 supports the following operating systems:

- Windows 11 Home, 64-bit
- Windows 11 Pro, 64-bit
- Windows 10 Home, 64-bit
- Windows 10 Pro, 64-bit

Memory

The following table lists the memory specifications of your Alienware m15 R4.

Table 4. Memory specifications

Description	Values
Memory slots	Onboard system memory Onboard system memory Indicate the system board and cannot be upgraded after purchase.
Memory type	Dual-channel DDR4
Memory speed	2933 MHz
Maximum memory configuration	32 GB
Minimum memory configuration	16 GB
Memory configurations supported	 16 GB, 2 x 8 GB, dual-channel DDR4, 2933 MHz 32 GB, 2 x 16 GB, dual-channel DDR4, 2933 MHz

External ports

The following table lists the external ports of your Alienware m15 R4.

Table 5. External ports

Description	Values
Network port	One RJ-45 port
USB ports	 Two USB 3.2 Gen 1 ports One USB 3.2 Gen 1 port with PowerShare One Thunderbolt 3 (USB Type-C) port with Power Delivery
Audio port	One headset (headphone and microphone combo) port
Video port	 One HDMI 2.1 port One Mini DisplayPort 1.4 One Thunderbolt 3 (USB Type-C) port with Power Delivery
Media-card reader	One microSD card slot
Power-adapter port	One 7.4 mm x 5.1 mm E4 DC-in
Security-cable slot	One wedge-shaped slot

Internal slots

The following table lists the internal slots of your Alienware m15 R4.

Table 6. Internal slots

Description	Values
M.2	Two M.2 2230/2280 slots for solid-state drives One M.2 2230 slot for a solid-state drive NOTE: To learn more about the features of different types of M.2 cards, see the knowledge base article 000144170 at www.dell.com/support .

Ethernet

The following table lists the wired Ethernet Local Area Network (LAN) specifications of your Alienware m15 R4.

Table 7. Ethernet specifications

Description	Values
Model number	Killer E3100X PCI-e Gigabit ethernet controller
Transfer rate	10/100/1000/2500 Mbps

Wireless module

The following table lists the Wireless Local Area Network (WLAN) module supported on your Alienware m15 R4.

Table 8. Wireless module specifications

Description	Values	
Model number	Killer Wi-Fi 6 AX1650	
Transfer rate	Up to 2400 Mbps	
Frequency bands supported	2.4 GHz/5 GHz	
Wireless standards	 WiFi 802.11a/b/g Wi-Fi 4 (WiFi 802.11n) Wi-Fi 5 (WiFi 802.11ac) Wi-Fi 6 (WiFi 802.11ax) 	
Encryption	64-bit/128-bit WEP AES-CCMP TKIP	
Bluetooth	Bluetooth 5.1	

Audio

The following table lists the audio specifications of your Alienware m15 R4.

Table 9. Audio specifications

Description		Values
Audio controller		Realtek ALC3281-CG
Stereo conversion		Supported
Internal audio interface		High definition audio interface
External audio interface	3	One headset (headphone and microphone combo) port HDMI 2.1 port
Number of speakers		2-Way (woofer/tweeter) stereo speaker design
Internal-speaker amplif	er	Supported
External volume control	s	Keyboard shortcut controls
Speaker output:		
	Average speaker output	4 W
	Peak speaker output	5 W
Subwoofer output	•	Not supported
Microphone		Digital-array microphones in camera assembly

Storage

This section lists the storage options on your Alienware m15 R4.

Your Alienware m15 R4 supports one of the following storage configurations:

- One M.2 2230/2280 solid-state drive
- One M.2 2230 solid-state drive and one 2280 solid-state drive
- Two M.2 2230 solid-state drives
- Two M.2 2280 solid-state drives
- One M.2 2230 solid-state drive and two M.2 2280 solid-state drives

The primary drive of your Alienware m15 R4 varies with the storage configuration. For computers with the M.2 2230/2280 solid-state drive, the primary drive is the designated boot drive.

Table 10. Storage specifications

Storage type	Interface type	Capacity
M.2 2230 solid-state drive	PCle Gen3 x4 NVMe, up to 32 Gbps	Up to 512 GB
M.2 2280 solid-state drive	PCle Gen3 x4 NVMe, up to 32 Gbps	Up to 2 TB

Media-card reader

The following table lists the media cards supported by your Alienware m15 R4.

Table 11. Media-card reader specifications

Description	Values
Media-card type	One microSD card slot
Media-cards supported	 Micro Secure Digital (mSD) Micro Secure Digital High Capacity (mSDHC) Micro Secure Digital Extended Capacity (mSDXC)
(i) NOTE: The maximum capacity supported by the media-card reader varies depending on the standard of the media card installed in your computer.	

Keyboard

The following table lists the keyboard specifications of your Alienware m15 R4.

Table 12. Keyboard specifications

Description	Values
Keyboard type	 Per-key RGB backlit keyboard 4-zone RGB backlit keyboard Mechanical keyboard
Keyboard layout	QWERTY
Number of keys	 United States and Canada: 82 keys United Kingdom: 83 keys Japan: 86 keys
Keyboard size	X=19.05 mm key pitch

Table 12. Keyboard specifications (continued)

Description	Values
	Y=19.05 mm key pitch
Keyboard shortcuts	Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. To type the alternate character, press Shift and the desired key. To perform secondary functions, press Fn and the desired key. (i) NOTE: You can define the primary behavior of the function keys (F1–F12) changing Function Key Behavior in BIOS setup program. For more information, see Keyboard shortcuts.

Camera

The following table lists the camera specifications of your Alienware m15 R4.

Table 13. Camera specifications

Des	cription	Values
Nun	nber of cameras	One camera
Can	nera type	HD RGB camera
Can	nera location	Front camera
Can	nera sensor type	CMOS sensor technology
Can	nera resolution:	
	Still image	0.92 megapixel
	Video	1280 x 720 (HD) at 30 fps
Dia	gonal viewing angle:	74.9 degrees

Touchpad

The following table lists the touchpad specifications of your Alienware m15 R4.

Table 14. Touchpad specifications

Description		Values
Touchpad res	solution:	
	Horizontal	1217
	Vertical	681
Touchpad dir	mensions:	
	Horizontal	105 mm (4.13 in.)
	Vertical	60 mm (2.36 in.)

Table 14. Touchpad specifications (continued)

Description	Values
	For more information about touchpad gestures available on Windows, see the Microsoft knowledge base article 4027871 at support.microsoft.com.

Power adapter

The following table lists the power adapter specifications of your Alienware m15 R4.

Table 15. Power adapter specifications

Description	Values
Туре	240 W
Connector dimensions:	,
External diameter	7.40 mm
Internal diameter	5.10 mm
Input voltage	100 VAC-240 VAC
Input frequency	50 Hz-60 Hz
Input current (maximum)	5 A
Output current (continuous)	12.31 A
Rated output voltage	19.50 VDC
Temperature range:	
Operating	0°C to 40°C (32°F to 104°F)
Storage	-40°C to 70°C (-40°F to 158°F)

Battery

The following table lists the battery specifications of your Alienware m15 R4.

Table 16. Battery specifications

Description		Values
Battery type		86 WHr, 6-cell "smart" lithium-ion battery
Battery volta	ge	11.40 VDC
Battery weig	ht (maximum)	0.34 kg (0.75 lb)
Battery dime	nsions:	
	Height	77.70 mm (3.06 in.)
	Width	295.20 mm (11.62 in.)
	Depth	7.56 mm (0.30 in.)

Table 16. Battery specifications (continued)

Descriptio	n	Values	
Temperatu	re range:		
	Operating	0°C to 60°C (32°F to 140°F)	
	Storage	-20°C to 60°C (-4°F to 140°F)	
Battery op	erating time	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.	
Battery charging time (approximate) (i) NOTE: Control the charging time, duration, start and end time, and so on using the Dell Power Manager application. For more information on the Dell Power Manager see, Me and My Dell on www.dell.com.		3 hours (when the computer is off)	
Coin-cell b	pattery	Not supported	

Display

The following table lists the display specifications of your Alienware m15 R4.

Table 17. Display specifications

Descriptio	on	Option one	Option two	Option three
Display typ	pe	15.6-inch Full High Definition (FHD)	15.6-inch Full High Definition (FHD)	15.6-inch Ultra High Definition (UHD)
Display-pa	anel technology	Wide-Viewing Angle (WVA)	Wide-Viewing Angle (WVA)	Organic Light-Emitting Diode (OLED)
Display-pa (active are	anel dimensions a):			
	Height	193.59 mm (7.62 in.)	193.59 mm (7.62 in.)	193.62 mm (7.62 in.)
,	Width	344.16 mm (13.55 in.)	344.16 mm (13.55 in.)	344.22 mm (13.55 in.)
	Diagonal	394.87 mm (15.55 in.)	394.87 mm (15.55 in.)	394.94 mm (15.55 in.)
Display-pa	anel native resolution	1920 x 1080	1920 x 1080	3840 x 2160
Luminance	e (typical)	300 nits	300 nits	400 nits
Megapixel	s	2.07	2.07	8.29
Color gam	ut	100% (sRGB)	100% (sRGB)	100% (DCI-P3)
Pixels Per I	Inch (PPI)	141	141	282
Contrast ra	atio (typ)	1000:1	1000:1	100,000:1
Response time (max)		7 ms	3 ms	1 ms
Refresh rat	te	144 Hz	300 Hz	60 Hz
Horizontal	view angle	+/- 85 degrees	+/- 85 degrees	+/- 85 degrees

Table 17. Display specifications (continued)

Description	Option one	Option two	Option three
Vertical view angle	+/- 85 degrees	+/- 85 degrees	+/- 85 degrees
Pixel pitch	0.18 mm	0.18 mm	0.09 mm
Power consumption (maximum)	7.80 W	6.3 W	14.8 W
Anti-glare vs glossy finish	Anti-glare	Anti-glare	TrueLife
Touch options	No	No	No
Dynamic Display Switch (DDS) support	Optional	No	No
G-Sync support	Yes	No	No

GPU—Integrated

The following table lists the specifications of the integrated Graphics Processing Unit (GPU) supported by your Alienware m15 R4.

Table 18. GPU—Integrated

Controller	External display support	Memory size	Processor
Intel UHD graphics	 One HDMI 2.1 port One Mini DisplayPort 1.4 One Thunderbolt 3 (USB Type-C) port with Power Delivery 	Shared system memory	10 th Generation Intel Core i7/i9K

GPU—Discrete

The following table lists the specifications of the discrete Graphics Processing Unit (GPU) supported by your Alienware m15 R4.

Table 19. GPU—Discrete

Controller	Memory size	Memory type
NVIDIA GeForce RTX 3060	6 GB	GDDR6
NVIDIA GeForce RTX 3070	8 GB	GDDR6
NVIDIA GeForce RTX 3080	8 GB	GDDR6

Operating and storage environment

This table lists the operating and storage specifications of your Alienware m15 R4.

Airborne contaminant level: G1 as defined by ISA-S71.04-1985

Table 20. Computer environment

Description	Operating	Storage
Temperature range	0°C to 35°C (32°F to 95°F)	-40°C to 65°C (-40°F to 149°F)

Table 20. Computer environment (continued)

Description	Operating	Storage
Relative humidity (maximum)	10% to 90% (non-condensing)	0% to 95% (non-condensing)
Vibration (maximum)*	0.66 GRMS	1.30 GRMS
Shock (maximum)	140 G†	160 G†
Altitude range	0 m to 3048 m (0 ft to 10000 ft)	0 m to 10668 m (0 ft to 35000 ft)

 $^{^{\}star}$ Measured using a random vibration spectrum that simulates user environment.

 $[\]dagger$ Measured using a 2 ms half-sine pulse when the hard drive is in use.

Keyboard shortcuts

NOTE: Keyboard characters may differ depending on the keyboard language configuration. Keys used for shortcuts remain the same across all language configurations.

Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. The symbol shown on the lower part of the key refers to the character that is typed out when the key is pressed. If you press shift and the key, the symbol shown on the upper part of the key is typed out. For example, if you press **2**, **2** is typed out; if you press **Shift + 2**, @ is typed out.

The keys F1-F12 at the top row of the keyboard are function keys for multi-media control, as indicated by the icon at the bottom of the key. Press the function key to invoke the task represented by the icon. For example, pressing F1 mutes the audio (refer to the table below).

However, if the function keys F1-F12 are needed for specific software applications, multi-media functionality can be disabled by pressing $\mathbf{Fn} + \mathbf{Esc}$. Subsequently, multi-media control can be invoked by pressing \mathbf{Fn} and the respective function key. For example, mute audio by pressing $\mathbf{Fn} + \mathbf{F1}$.

NOTE: You can also define the primary behavior of the function keys (F1-F12) by changing **Function Key Behavior** in BIOS setup program.

Table 21. List of keyboard shortcuts

Keys	Description
FN + FI 1/2	Disconnect Alienware Graphics Amplifier
FN + F2	Disable/enable wireless
FN + F3	Mute audio
FN + F4 + 0	Decrease volume
FN + F5	Increase volume
FN + F8	Switch to external display
FN + F9 **	Decrease brightness
FN + FIO **	Increase brightness
FN + FII T-PAD	Disable/enable touchpad
FN + F12 ALIENTS	Disable/enable AlienFX

Alienware Command Center

Alienware Command Center (AWCC) provides a single interface to customize and enhance the gaming experience. The AWCC dashboard displays most recently played or added games, and provides game-specific information, themes, profiles, and access to computer settings. You can quickly access settings such as game-specific profiles and themes, lighting, macros, and audio that are critical to the gaming experience.

AWCC also supports AlienFX 2.0. AlienFX enables you to create, assign, and share game-specific lighting maps to enhance the gaming experience. It also enables you to create your own individual lighting effects and apply them to the computer or attached peripherals. AWCC embeds Peripheral Controls to ensure a unified experience and the ability to link these settings to your computer or game.

AWCC supports the following features:

- FX: Create and manage the AlienFX zones.
- Fusion: Includes the ability to adjust game-specific Power Management, Sound Management, and Thermal Management features.
- Peripheral Management: Enables peripherals to appear in and be managed in Alienware Command Center. Supports key
 peripheral settings and associates with other functions such as profiles, macros, AlienFX, and game library.

AWCC also supports Sound Management, Thermal Controls, CPU, GPU, Memory (RAM) monitoring. For more information about AWCC, see the *Alienware Command Center Online Help* or the knowledge base article 000179513 at www.dell.com/support.

Getting help and contacting Alienware

Self-help resources

You can get information and help on Alienware products and services using these online self-help resources:

Table 22. Alienware products and online self-help resources

Self-help resources	Resource location
Information about Alienware products and services	www.alienware.com
My Dell app	Dell
Tips	
Contact Support	In Windows search, type Contact Support , and press Enter .
Online help for operating system	www.dell.com/support/windows
Access top solutions, diagnostics, drivers and downloads, and learn more about your computer through videos, manuals and documents.	Your Alienware computer is uniquely identified by a Service Tag or Express Service Code. To view relevant support resources for your Dell computer, enter the Service Tag or Express Service Code at www.dell.com/support . For more information on how to find the Service Tag for your computer, see Locate the Service Tag on your computer .
VR Support	www.dell.com/VRsupport
Videos providing step-by-step instructions to service your computer	www.youtube.com/alienwareservices

Contacting Alienware

To contact Alienware for sales, technical support, or customer service issues, see www.alienware.com.

- (i) NOTE: Availability varies by country/region and product, and some services may not be available in your country/region.
- (i) NOTE: If you do not have an active Internet connection, you can find contact information about your purchase invoice, packing slip, bill, or Dell product catalog.